

Package: depower (via r-universe)

January 10, 2025

Title Power Analysis for Differential Expression Studies

Version 2024.12.4

Description Provides a convenient framework to simulate, test, power, and visualize data for differential expression studies with lognormal or negative binomial outcomes. Supported designs are two-sample comparisons of independent or dependent outcomes. Power may be summarized in the context of controlling the per-family error rate or family-wise error rate. Negative binomial methods are described in Yu, Fernandez, and Brock (2017) <[doi:10.1186/s12859-017-1648-2](https://doi.org/10.1186/s12859-017-1648-2)> and Yu, Fernandez, and Brock (2020) <[doi:10.1186/s12859-020-3541-7](https://doi.org/10.1186/s12859-020-3541-7)>.

URL <https://brettklamer.com/work/depower/>,
<https://bitbucket.org/bklamer/depower/>

License MIT + file LICENSE

Depends R (>= 4.2.0)

Imports Rdpack, stats, mvnfast, glmmTMB, dplyr, multidplyr, ggplot2, scales

Suggests tinytest, rmarkdown

RdMacros Rdpack

Language en-US

Encoding UTF-8

RoxygenNote 7.3.2

NeedsCompilation no

Author Brett Klamer [aut, cre]
(<<https://orcid.org/0000-0002-8334-4831>>), Lianbo Yu [aut]
(<<https://orcid.org/0000-0002-2025-2585>>)

Maintainer Brett Klamer <code@brettklamer.com>

Date/Publication 2024-12-08 21:50:02 UTC

Additional_repositories <https://cranhaven.r-universe.dev>

Config/pak/sysreqs cmake make

Repository <https://cranhaven.r-universe.dev>

RemoteUrl <https://github.com/cranhaven/cranhaven.r-universe.dev>

RemoteRef package/depower

RemoteSha 12cb794ad9e7b8494e951e67b452c53132433732

RemoteSubdir depower

Contents

glmm_bnb	2
glmm_poisson	6
glm_nb	9
lrt_bnb	12
lrt_nb	14
mle_bnb	17
mle_nb	19
nll_bnb	22
nll_nb	24
plot.depower	27
power	31
sim_bnb	36
sim_log_lognormal	42
sim_nb	49
t_test_paired	54
t_test_welch	57
wald_test_bnb	60
wald_test_nb	62
Index	66

glmm_bnb	<i>GLMM for BNB ratio of means</i>
----------	------------------------------------

Description

Generalized linear mixed model for bivariate negative binomial outcomes.

Usage

```
glmm_bnb(data, test = "wald", ci_level = NULL, ...)
```

Arguments

data	(list) A list whose first element is the vector of negative binomial values from sample 1 and the second element is the vector of negative binomial values from sample 2. Each vector must be sorted by the subject/item index and must be the same sample size. NAs are silently excluded. The default output from <code>sim_bnb()</code> .
test	(String: "wald"; "c("wald", "lrt")) The statistical method used for the test results. <code>test = "wald"</code> performs a Wald test and optionally the Wald confidence intervals. <code>test = "lrt"</code> performs a likelihood ratio test and optionally the profile likelihood confidence intervals (means and ratio). The Wald interval is always used for the dispersion and standard deviation of the item (subject) random intercept.
ci_level	(Scalar numeric: NULL; (0, 1)) If NULL, confidence intervals are set as NA. If in (0, 1), confidence intervals are calculated at the specified level. Profile likelihood intervals are computationally intensive, so intervals from <code>test = "lrt"</code> may be slow.
...	Optional arguments passed to <code>glmmTMB::glmmTMB()</code> .

Details

Uses `glmmTMB::glmmTMB()` in the form

```
glmmTMB(
  formula = value ~ condition + (1 | item),
  data = data,
  dispformula = ~ 1,
  family = nbinom2
)
```

to model dependent negative binomial outcomes $X_1, X_2 \sim \text{BNB}(\mu, r, \theta)$ where μ is the mean of sample 1, r is the ratio of the means of sample 2 with respect to sample 1, and θ is the dispersion parameter.

The hypotheses for the LRT and Wald test of r are

$$H_{null} : \log(r) = 0$$

$$H_{alt} : \log(r) \neq 0$$

where $r = \frac{\bar{X}_2}{\bar{X}_1}$ is the population ratio of arithmetic means for sample 2 with respect to sample 1 and $\log(r_{null}) = 0$ assumes the population means are identical.

When simulating data from `sim_bnb()`, the mean is a function of the item (subject) random effect which in turn is a function of the dispersion parameter. Thus, `glmm_bnb()` has biased mean and dispersion estimates. The bias increases as the dispersion parameter gets smaller and decreases as the dispersion parameter gets larger. However, estimates of the ratio and standard deviation of the random intercept tend to be accurate. The p-value for `glmm_bnb()` is generally overconservative compared to `glmm_poisson()`, `wald_test_bnb()` and `lrt_bnb()`. In summary, the negative binomial mixed-effects model fit by `glmm_bnb()` is not recommended for the BNB data simulated by `sim_bnb()`. Instead, `wald_test_bnb()` or `lrt_bnb()` should typically be used instead.

Value

A list with the following elements:

Slot	Subslot	Name	Description
1		chisq	Asymptotic χ^2 test statistic for the ratio of means.
2		df	Degrees of freedom.
3		p	p-value.
4		ratio	Estimated ratio of means (sample 2 / sample 1).
4	1	estimate	Point estimate.
4	2	lower	Confidence interval lower bound.
4	3	upper	Confidence interval upper bound.
5		mean1	Estimated mean of sample 1.
5	1	estimate	Point estimate.
5	2	lower	Confidence interval lower bound.
5	3	upper	Confidence interval upper bound.
6		mean2	Estimated mean of sample 2.
6	1	estimate	Point estimate.
6	2	lower	Confidence interval lower bound.
6	3	upper	Confidence interval upper bound.
7		dispersion	Estimated dispersion.
7	1	estimate	Point estimate.
7	2	lower	Confidence interval lower bound.
7	3	upper	Confidence interval upper bound.
8		item_sd	Estimated standard deviation of the item (subject) random intercept.
8	1	estimate	Point estimate.
8	2	lower	Confidence interval lower bound.
8	3	upper	Confidence interval upper bound.
9		n1	Sample size of sample 1.
10		n2	Sample size of sample 2.
11		method	Method used for the results.
12		test	Type of hypothesis test.
13		alternative	The alternative hypothesis.
14		ci_level	Confidence level of the interval.
15		hessian	Information about the Hessian matrix.
16		convergence	Information about convergence.

References

Hilbe JM (2011). *Negative Binomial Regression*, 2 edition. Cambridge University Press. ISBN 9780521198158 9780511973420, doi:[10.1017/CBO9780511973420](https://doi.org/10.1017/CBO9780511973420).

Hilbe JM (2014). *Modeling count data*. Cambridge University Press, New York, NY. ISBN 9781107028333 9781107611252, doi:[10.1017/CBO9781139236065](https://doi.org/10.1017/CBO9781139236065).

See Also

[glmmTMB::glmmTMB\(\)](#)

Examples

```

#-----
# glmm_bnb() examples
#-----
library(depower)

set.seed(1234)
d <- sim_bnb(
  n = 40,
  mean1 = 10,
  ratio = 1.2,
  dispersion = 2
)

lrt <- glmm_bnb(d, test = "lrt")
lrt

wald <- glmm_bnb(d, test = "wald", ci_level = 0.95)
wald

#-----
# Compare results to manual calculation of chi-square statistic
#-----
# Use the same data, but as a data frame instead of list
set.seed(1234)
d <- sim_bnb(
  n = 40,
  mean1 = 10,
  ratio = 1.2,
  dispersion = 2,
  return_type = "data.frame"
)

mod_alt <- glmmTMB::glmmTMB(
  formula = value ~ condition + (1 | item),
  data = d,
  dispformula = ~ 1,
  family = glmmTMB::nbinom2,
)
mod_null <- glmmTMB::glmmTMB(
  formula = value ~ 1 + (1 | item),
  data = d,
  dispformula = ~ 1,
  family = glmmTMB::nbinom2,
)

lrt_chisq <- as.numeric(-2 * (logLik(mod_null) - logLik(mod_alt)))
lrt_chisq
wald_chisq <- summary(mod_alt)$coefficients$cond["condition2", "z value"]^2
wald_chisq

anova(mod_null, mod_alt)

```

glmm_poisson

*GLMM for Poisson ratio of means***Description**

Generalized linear mixed model for two dependent Poisson outcomes.

Usage

```
glmm_poisson(data, test = "wald", ci_level = NULL, ...)
```

Arguments

data	(list) A list whose first element is the vector of Poisson values from sample 1 and the second element is the vector of Poisson values from sample 2. Each vector must be sorted by the subject/item index and must be the same sample size. NA s are silently excluded. The default output from <code>sim_bnb()</code> .
test	(String: "wald"; "c("wald", "lrt")) The statistical method used for the test results. <code>test = "wald"</code> performs a Wald test and optionally the Wald confidence intervals. <code>test = "lrt"</code> performs a likelihood ratio test and optionally the profile likelihood confidence intervals (means and ratio). The Wald interval is always used for the standard deviation of the item (subject) random intercept.
ci_level	(Scalar numeric: NULL; (0, 1)) If NULL, confidence intervals are set as NA. If in (0, 1), confidence intervals are calculated at the specified level. Profile likelihood intervals are computationally intensive, so intervals from <code>test = "lrt"</code> may be slow.
...	Optional arguments passed to <code>glmmTMB::glmmTMB()</code> .

Details

Uses `glmmTMB::glmmTMB()` in the form

```
glmmTMB(
  formula = value ~ condition + (1 | item),
  data = data,
  family = stats::poisson
)
```

to model dependent Poisson outcomes $X_1 \sim \text{Poisson}(\mu)$ and $X_2 \sim \text{Poisson}(r\mu)$ where μ is the mean of sample 1 and r is the ratio of the means of sample 2 with respect to sample 1.

The hypotheses for the LRT and Wald test of r are

$$H_{null} : \log(r) = 0$$

$$H_{alt} : \log(r) \neq 0$$

where $r = \frac{\bar{X}_2}{\bar{X}_1}$ is the population ratio of arithmetic means for sample 2 with respect to sample 1 and $\log(r_{null}) = 0$ assumes the population means are identical.

When simulating data from `sim_bnb()`, the mean is a function of the item (subject) random effect which in turn is a function of the dispersion parameter. Thus, `glmm_poisson()` has biased mean estimates. The bias increases as the dispersion parameter gets smaller and decreases as the dispersion parameter gets larger. However, estimates of the ratio and standard deviation of the random intercept tend to be accurate. In summary, the Poisson mixed-effects model fit by `glmm_poisson()` is not recommended for the BNB data simulated by `sim_bnb()`. Instead, `wald_test_bnb()` or `lrt_bnb()` should typically be used instead.

Value

A list with the following elements:

Slot	Subslot	Name	Description
1		chisq	Asymptotic χ^2 test statistic for the ratio of means.
2		df	Degrees of freedom.
3		p	p-value.
4		ratio	Estimated ratio of means (sample 2 / sample 1).
4	1	estimate	Point estimate.
4	2	lower	Confidence interval lower bound.
4	3	upper	Confidence interval upper bound.
5		mean1	Estimated mean of sample 1.
5	1	estimate	Point estimate.
5	2	lower	Confidence interval lower bound.
5	3	upper	Confidence interval upper bound.
6		mean2	Estimated mean of sample 2.
6	1	estimate	Point estimate.
6	2	lower	Confidence interval lower bound.
6	3	upper	Confidence interval upper bound.
7		item_sd	Estimated standard deviation of the item (subject) random intercept.
7	1	estimate	Point estimate.
7	2	lower	Confidence interval lower bound.
7	3	upper	Confidence interval upper bound.
8		n1	Sample size of sample 1.
9		n2	Sample size of sample 2.
10		method	Method used for the results.
11		test	Type of hypothesis test.
12		alternative	The alternative hypothesis.
13		ci_level	Confidence level of the interval.
14		hessian	Information about the Hessian matrix.
15		convergence	Information about convergence.

References

Hilbe JM (2011). *Negative Binomial Regression*, 2 edition. Cambridge University Press. ISBN 9780521198158 9780511973420, doi:10.1017/CBO9780511973420.

Hilbe JM (2014). *Modeling count data*. Cambridge University Press, New York, NY. ISBN 9781107028333 9781107611252, doi:10.1017/CBO9781139236065.

See Also

[glmmTMB::glmmTMB\(\)](#)

Examples

```
#-----
# glmm_poisson() examples
#-----
library(depower)

set.seed(1234)
d <- sim_bnb(
  n = 40,
  mean1 = 10,
  ratio = 1.2,
  dispersion = 2
)

lrt <- glmm_poisson(d, test = "lrt")
lrt

wald <- glmm_poisson(d, test = "wald", ci_level = 0.95)
wald

#-----
# Compare results to manual calculation of chi-square statistic
#-----
# Use the same data, but as a data frame instead of list
set.seed(1234)
d <- sim_bnb(
  n = 40,
  mean1 = 10,
  ratio = 1.2,
  dispersion = 2,
  return_type = "data.frame"
)

mod_alt <- glmmTMB::glmmTMB(
  formula = value ~ condition + (1 | item),
  data = d,
  family = stats::poisson,
)
mod_null <- glmmTMB::glmmTMB(
  formula = value ~ 1 + (1 | item),
```



```

    data = d,
    family = stats::poisson,
  )

  lrt_chisq <- as.numeric(-2 * (logLik(mod_null) - logLik(mod_alt)))
  lrt_chisq
  wald_chisq <- summary(mod_alt)$coefficients$cond["condition2", "z value"]^2
  wald_chisq

  anova(mod_null, mod_alt)

```

glm_nb

GLM for NB ratio of means

Description

Generalized linear model for two independent negative binomial outcomes.

Usage

```
glm_nb(data, equal_dispersion = FALSE, test = "wald", ci_level = NULL, ...)
```

Arguments

data	(list) A list whose first element is the vector of negative binomial values from group 1 and the second element is the vector of negative binomial values from group 2. <i>NA</i> s are silently excluded. The default output from <code>sim_nb()</code> .
equal_dispersion	(Scalar logical: FALSE) If TRUE, the model is fit assuming both groups have the same population dispersion parameter. If FALSE (default), the model is fit assuming different dispersions.
test	(String: "wald"; <code>c("wald", "lrt")</code>) The statistical method used for the test results. <code>test = "wald"</code> performs a Wald test and optionally the Wald confidence intervals. <code>test = "lrt"</code> performs a likelihood ratio test and optionally the profile likelihood confidence intervals.
ci_level	(Scalar numeric: NULL; $(0, 1)$) If NULL, confidence intervals are set as NA. If in $(0, 1)$, confidence intervals are calculated at the specified level. Profile likelihood intervals are computationally intensive, so intervals from <code>test = "lrt"</code> may be slow.
...	Optional arguments passed to <code>glmmTMB::glmmTMB()</code> .

Details

Uses `glmmTMB::glmmTMB()` in the form

```
glmmTMB(
  formula = value ~ condition,
  data = data,
  dispformula = ~ condition,
  family = nbinom2
)
```

to model independent negative binomial outcomes $X_1 \sim \text{NB}(\mu, \theta_1)$ and $X_2 \sim \text{NB}(r\mu, \theta_2)$ where μ is the mean of group 1, r is the ratio of the means of group 2 with respect to group 1, θ_1 is the dispersion parameter of group 1, and θ_2 is the dispersion parameter of group 2.

The hypotheses for the LRT and Wald test of r are

$$H_{null} : \log(r) = 0$$

$$H_{alt} : \log(r) \neq 0$$

where $r = \frac{\bar{X}_2}{\bar{X}_1}$ is the population ratio of arithmetic means for group 2 with respect to group 1 and $\log(r_{null}) = 0$ assumes the population means are identical.

Value

A list with the following elements:

Slot	Subslot	Name	Description
1		chisq	Asymptotic χ^2 test statistic for the ratio of means.
2		df	Degrees of freedom.
3		p	p-value.
4		ratio	Estimated ratio of means (group 2 / group 1).
4	1	estimate	Point estimate.
4	2	lower	Confidence interval lower bound.
4	3	upper	Confidence interval upper bound.
5		mean1	Estimated mean of group 1.
5	1	estimate	Point estimate.
5	2	lower	Confidence interval lower bound.
5	3	upper	Confidence interval upper bound.
6		mean2	Estimated mean of group 2.
6	1	estimate	Point estimate.
6	2	lower	Confidence interval lower bound.
6	3	upper	Confidence interval upper bound.
7		dispersion1	Estimated dispersion of group 1.
7	1	estimate	Point estimate.
7	2	lower	Confidence interval lower bound.
7	3	upper	Confidence interval upper bound.
8		dispersion2	Estimated dispersion of group 2.
8	1	estimate	Point estimate.

8	2	lower	Confidence interval lower bound.
8	3	upper	Confidence interval upper bound.
9		n1	Sample size of group 1.
10		n2	Sample size of group 2.
11		method	Method used for the results.
12		test	Type of hypothesis test.
13		alternative	The alternative hypothesis.
14		equal_dispersion	Whether or not equal dispersions were assumed.
15		ci_level	Confidence level of the intervals.
16		hessian	Information about the Hessian matrix.
17		convergence	Information about convergence.

References

Hilbe JM (2011). *Negative Binomial Regression*, 2 edition. Cambridge University Press. ISBN 9780521198158 9780511973420, doi:[10.1017/CBO9780511973420](https://doi.org/10.1017/CBO9780511973420).

Hilbe JM (2014). *Modeling count data*. Cambridge University Press, New York, NY. ISBN 9781107028333 9781107611252, doi:[10.1017/CBO9781139236065](https://doi.org/10.1017/CBO9781139236065).

See Also

[glmmTMB::glmmTMB\(\)](#)

Examples

```
#-----
# glm_nb() examples
#-----
library(depower)

set.seed(1234)
d <- sim_nb(
  n1 = 60,
  n2 = 40,
  mean1 = 10,
  ratio = 1.5,
  dispersion1 = 2,
  dispersion2 = 8
)

lrt <- glm_nb(d, equal_dispersion = FALSE, test = "lrt", ci_level = 0.95)
lrt

wald <- glm_nb(d, equal_dispersion = FALSE, test = "wald", ci_level = 0.95)
wald

#-----
# Compare results to manual calculation of chi-square statistic
#-----
# Use the same data, but as a data frame instead of list
set.seed(1234)
```

```

d <- sim_nb(
  n1 = 60,
  n2 = 40,
  mean1 = 10,
  ratio = 1.5,
  dispersion1 = 2,
  dispersion2 = 8,
  return_type = "data.frame"
)

mod_alt <- glmmTMB::glmmTMB(
  formula = value ~ condition,
  data = d,
  dispformula = ~ condition,
  family = glmmTMB::nbinom2,
)
mod_null <- glmmTMB::glmmTMB(
  formula = value ~ 1,
  data = d,
  dispformula = ~ condition,
  family = glmmTMB::nbinom2,
)

lrt_chisq <- as.numeric(-2 * (logLik(mod_null) - logLik(mod_alt)))
lrt_chisq
wald_chisq <- summary(mod_alt)$coefficients$cond["condition2", "z value"]^2
wald_chisq

anova(mod_null, mod_alt)

```

lrt_bnb

Likelihood ratio test for BNB ratio of means

Description

Likelihood ratio test for the ratio of means from bivariate negative binomial outcomes.

Usage

```
lrt_bnb(data, ratio_null = 1, ...)
```

Arguments

data (list)
A list whose first element is the vector of negative binomial values from sample 1 and the second element is the vector of negative binomial values from sample 2. Each vector must be sorted by the subject/item index and must be the same sample size. *NAs* are silently excluded. The default output from `sim_bnb()`.

ratio_null (Scalar numeric: 1; (0, Inf))
 The ratio of means assumed under the null hypothesis (sample 2 / sample 1). Typically, ratio_null = 1 (no difference). See 'Details' for additional information.

... Optional arguments passed to the MLE function `mle_bnb()`.

Details

This function is primarily designed for speed in simulation. Missing values are silently excluded.

Suppose $X_1 | G = g \sim \text{Poisson}(\mu g)$ and $X_2 | G = g \sim \text{Poisson}(r\mu g)$ where $G \sim \text{Gamma}(\theta, \theta^{-1})$ is the random item (subject) effect. Then $X_1, X_2 \sim \text{BNB}(\mu, r, \theta)$ is the joint distribution where X_1 and X_2 are dependent (though conditionally independent), X_1 is the count outcome for sample 1 of the items (subjects), X_2 is the count outcome for sample 2 of the items (subjects), μ is the conditional mean of sample 1, r is the ratio of the conditional means of sample 2 with respect to sample 1, and θ is the gamma distribution shape parameter which controls the dispersion and the correlation between sample 1 and 2.

The hypotheses for the LRT of r are

$$\begin{aligned} H_{null} &: r = r_{null} \\ H_{alt} &: r \neq r_{null} \end{aligned}$$

where $r = \frac{\bar{X}_2}{\bar{X}_1}$ is the population ratio of arithmetic means for sample 2 with respect to sample 1 and r_{null} is a constant for the assumed null population ratio of means (typically $r_{null} = 1$).

The LRT statistic is

$$\begin{aligned} \lambda &= -2 \ln \frac{\sup_{\Theta_{null}} L(r, \mu, \theta)}{\sup_{\Theta} L(r, \mu, \theta)} \\ &= -2 [\ln \sup_{\Theta_{null}} L(r, \mu, \theta) - \ln \sup_{\Theta} L(r, \mu, \theta)] \\ &= -2(l(r_{null}, \tilde{\mu}, \tilde{\theta}) - l(\hat{r}, \hat{\mu}, \hat{\theta})) \end{aligned}$$

Under H_{null} , the LRT test statistic is asymptotically distributed as χ_1^2 . The approximate level α test rejects H_{null} if $\lambda \geq \chi_1^2(1 - \alpha)$. Note that the asymptotic critical value is known to underestimate the exact critical value. Hence, the nominal significance level may not be achieved for small sample sizes (possibly $n \leq 10$ or $n \leq 50$).

Value

A list with the following elements:

Slot	Subslot	Name	Description
1		chisq	Asymptotic χ^2 test statistic for the ratio of means.
2		df	Degrees of freedom.
3		p	p-value.
4		ratio	Estimated ratio of means (sample 2 / sample 1).
5		alternative	Point estimates under the alternative hypothesis.
5	1	mean1	Estimated mean of sample 1.

5	2	mean2	Estimated mean of sample 2.
5	3	dispersion	Estimated dispersion.
6		null	Point estimates under the null hypothesis.
6	1	mean1	Estimated mean of sample 1.
6	2	mean2	Estimated mean of sample 2.
6	3	dispersion	Estimated dispersion.
7		n1	The sample size of sample 1.
8		n2	The sample size of sample 2.
9		method	Method used for the results.
10		ratio_null	Assumed population ratio of means.
11		mle_code	Integer indicating why the optimization process terminated.
12		mle_message	Information from the optimizer.

References

Rettiganti M, Nagaraja HN (2012). “Power Analyses for Negative Binomial Models with Application to Multiple Sclerosis Clinical Trials.” *Journal of Biopharmaceutical Statistics*, **22**(2), 237–259. ISSN 1054-3406, 1520-5711, doi:[10.1080/10543406.2010.528105](https://doi.org/10.1080/10543406.2010.528105).

Aban IB, Cutter GR, Mavinga N (2009). “Inferences and power analysis concerning two negative binomial distributions with an application to MRI lesion counts data.” *Computational Statistics & Data Analysis*, **53**(3), 820–833. ISSN 01679473, doi:[10.1016/j.csda.2008.07.034](https://doi.org/10.1016/j.csda.2008.07.034).

Examples

```
#-----
# lrt_bnb() examples
#-----
library(depower)

set.seed(1234)
sim_bnb(
  n = 40,
  mean1 = 10,
  ratio = 1.2,
  dispersion = 2
) |>
  lrt_bnb()
```

lrt_nb

Likelihood ratio test for NB ratio of means

Description

Likelihood ratio test for the ratio of means from two independent negative binomial outcomes.

Usage

```
lrt_nb(data, equal_dispersion = FALSE, ratio_null = 1, ...)
```

Arguments

data	(list) A list whose first element is the vector of negative binomial values from group 1 and the second element is the vector of negative binomial values from group 2. NAs are silently excluded. The default output from <code>sim_nb()</code> .
equal_dispersion	(Scalar logical: FALSE) If TRUE, the LRT is calculated assuming both groups have the same population dispersion parameter. If FALSE (default), the LRT is calculated assuming different dispersions.
ratio_null	(Scalar numeric: 1; (0, Inf)) The ratio of means assumed under the null hypothesis (group 2 / group 1). Typically <code>ratio_null = 1</code> (no difference). See 'Details' for additional information.
...	Optional arguments passed to the MLE function <code>mle_nb()</code> .

Details

This function is primarily designed for speed in simulation. Missing values are silently excluded.

Suppose $X_1 \sim NB(\mu, \theta_1)$ and $X_2 \sim NB(r\mu, \theta_2)$ where X_1 and X_2 are independent, X_1 is the count outcome for items in group 1, X_2 is the count outcome for items in group 2, μ is the arithmetic mean count in group 1, r is the ratio of arithmetic means for group 2 with respect to group 1, θ_1 is the dispersion parameter of group 1, and θ_2 is the dispersion parameter of group 2.

The hypotheses for the LRT of r are

$$\begin{aligned} H_{null} &: r = r_{null} \\ H_{alt} &: r \neq r_{null} \end{aligned}$$

where $r = \frac{\bar{X}_2}{\bar{X}_1}$ is the population ratio of arithmetic means for group 2 with respect to group 1 and r_{null} is a constant for the assumed null population ratio of means (typically $r_{null} = 1$).

The LRT statistic is

$$\begin{aligned} \lambda &= -2 \ln \frac{\sup_{\Theta_{null}} L(r, \mu, \theta_1, \theta_2)}{\sup_{\Theta} L(r, \mu, \theta_1, \theta_2)} \\ &= -2 [\ln \sup_{\Theta_{null}} L(r, \mu, \theta_1, \theta_2) - \ln \sup_{\Theta} L(r, \mu, \theta_1, \theta_2)] \\ &= -2(l(r_{null}, \tilde{\mu}, \tilde{\theta}_1, \tilde{\theta}_2) - l(\hat{r}, \hat{\mu}, \hat{\theta}_1, \hat{\theta}_2)) \end{aligned}$$

Under H_{null} , the LRT test statistic is asymptotically distributed as χ_1^2 . The approximate level α test rejects H_{null} if $\lambda \geq \chi_1^2(1 - \alpha)$. Note that the asymptotic critical value is known to underestimate the exact critical value. Hence, the nominal significance level may not be achieved for small sample sizes (possibly $n \leq 10$ or $n \leq 50$).

Value

A list with the following elements:

Slot	Subslot	Name	Description
1		chisq	Asymptotic χ^2 test statistic for the ratio of means.
2		df	Degrees of freedom.
3		p	p-value.
4		ratio	Estimated ratio of means (group 2 / group 1).
5		alternative	Point estimates under the alternative hypothesis.
5	1	mean1	Estimated mean of group 1.
5	2	mean2	Estimated mean of group 2.
5	3	dispersion1	Estimated dispersion of group 1.
5	4	dispersion2	Estimated dispersion of group 2.
6		null	Point estimates under the null hypothesis.
6	1	mean1	Estimated mean of group 1.
6	2	mean2	Estimated mean of group 2.
6	3	dispersion1	Estimated dispersion of group 1.
6	4	dispersion2	Estimated dispersion of group 2.
7		n1	Sample size of group 1.
8		n2	Sample size of group 2.
9		method	Method used for the results.
10		equal_dispersion	Whether or not equal dispersions were assumed.
11		ratio_null	Assumed population ratio of means.
12		mle_code	Integer indicating why the optimization process terminated.
13		mle_message	Information from the optimizer.

References

Rettiganti M, Nagaraja HN (2012). “Power Analyses for Negative Binomial Models with Application to Multiple Sclerosis Clinical Trials.” *Journal of Biopharmaceutical Statistics*, **22**(2), 237–259. ISSN 1054-3406, 1520-5711, doi:10.1080/10543406.2010.528105.

Aban IB, Cutter GR, Mavinga N (2009). “Inferences and power analysis concerning two negative binomial distributions with an application to MRI lesion counts data.” *Computational Statistics & Data Analysis*, **53**(3), 820–833. ISSN 01679473, doi:10.1016/j.csda.2008.07.034.

Examples

```
#-----
# lrt_nb() examples
#-----
library(depower)

set.seed(1234)
sim_nb(
  n1 = 60,
  n2 = 40,
  mean1 = 10,
  ratio = 1.5,
  dispersion1 = 2,
  dispersion2 = 8
) |>
  lrt_nb()
```

mle_bnb	<i>MLE for BNB</i>
---------	--------------------

Description

Maximum likelihood estimates (MLE) for bivariate negative binomial outcomes.

Usage

```
mle_bnb_null(data, ratio_null = 1, method = "nlm_constrained", ...)
```

```
mle_bnb_alt(data, method = "nlm_constrained", ...)
```

Arguments

data	(list) A list whose first element is the vector of negative binomial values from sample 1 and the second element is the vector of negative binomial values from sample 2. Each vector must be sorted by the subject/item index and must be the same sample size. NAs are silently excluded. The default output from sim_bnb() .
ratio_null	(Scalar numeric: 1; (0, Inf)) The ratio of means assumed under the null hypothesis (sample 2 / sample 1). Typically ratio_null = 1 (no difference).
method	(string: "nlm_constrained") The optimization method. Must choose one of "nlm", "nlm_constrained", "optim", or "optim_constrained". The default bounds for constrained optimization are [1e-03, 1e06].
...	Optional arguments passed to the optimization method.

Details

These functions are primarily designed for speed in simulation. Missing values are silently excluded.

Suppose $X_1 | G = g \sim \text{Poisson}(\mu g)$ and $X_2 | G = g \sim \text{Poisson}(r\mu g)$ where $G \sim \text{Gamma}(\theta, \theta^{-1})$ is the random item (subject) effect. Then $X_1, X_2 \sim \text{BNB}(\mu, r, \theta)$ is the joint distribution where X_1 and X_2 are dependent (though conditionally independent), X_1 is the count outcome for sample 1 of the items (subjects), X_2 is the count outcome for sample 2 of the items (subjects), μ is the conditional mean of sample 1, r is the ratio of the conditional means of sample 2 with respect to sample 1, and θ is the gamma distribution shape parameter which controls the dispersion and the correlation between sample 1 and 2.

The MLEs of r and μ are $\hat{r} = \frac{\bar{x}_2}{\bar{x}_1}$ and $\hat{\mu} = \bar{x}_1$. The MLE of θ is found by maximizing the profile log-likelihood $l(\hat{r}, \hat{\mu}, \theta)$ with respect to θ . When $r = r_{null}$ is known, the MLE of μ is $\tilde{\mu} = \frac{\bar{x}_1 + \bar{x}_2}{1 + r_{null}}$ and $\tilde{\theta}$ is obtained by maximizing the profile log-likelihood $l(r_{null}, \tilde{\mu}, \theta)$ with respect to θ .

The backend method for numerical optimization is controlled by argument method which refers to [stats::nlm\(\)](#), [stats::nlminb\(\)](#), or [stats::optim\(\)](#). If you would like to see warnings from the optimizer, include argument warnings = TRUE.

Value

- For `mle_bnb_alt`, a list with the following elements:

Slot	Name	Description
1	mean1	MLE for mean of sample 1.
2	mean2	MLE for mean of sample 2.
3	ratio	MLE for ratio of means.
4	dispersion	MLE for BNB dispersion.
5	nll	Minimum of negative log-likelihood.
6	nparams	Number of estimated parameters.
7	n1	Sample size of sample 1.
8	n2	Sample size of sample 2.
9	method	Method used for the results.
10	mle_method	Method used for optimization.
11	mle_code	Integer indicating why the optimization process terminated.
12	mle_message	Additional information from the optimizer.

- For `mle_bnb_null`, a list with the following elements:

Slot	Name	Description
1	mean1	MLE for mean of sample 1.
2	mean2	MLE for mean of sample 2.
3	ratio_null	Population ratio of means assumed for null hypothesis. $\text{mean2} = \text{mean1} * \text{ratio_null}$.
4	dispersion	MLE for BNB dispersion.
5	nll	Minimum of negative log-likelihood.
6	nparams	Number of estimated parameters.
7	n1	Sample size of sample 1.
8	n2	Sample size of sample 2.
9	method	Method used for the results.
10	mle_method	Method used for optimization.
11	mle_code	Integer indicating why the optimization process terminated.
12	mle_message	Additional information from the optimizer.

References

Rettiganti M, Nagaraja HN (2012). “Power Analyses for Negative Binomial Models with Application to Multiple Sclerosis Clinical Trials.” *Journal of Biopharmaceutical Statistics*, **22**(2), 237–259. ISSN 1054-3406, 1520-5711, doi:[10.1080/10543406.2010.528105](https://doi.org/10.1080/10543406.2010.528105).

Aban IB, Cutter GR, Mavinga N (2009). “Inferences and power analysis concerning two negative binomial distributions with an application to MRI lesion counts data.” *Computational Statistics & Data Analysis*, **53**(3), 820–833. ISSN 01679473, doi:[10.1016/j.csda.2008.07.034](https://doi.org/10.1016/j.csda.2008.07.034).

See Also

[sim_bnb\(\)](#), [nll_bnb](#)

Examples

```

#-----
# mle_bnb() examples
#-----
library(depower)

set.seed(1234)
d <- sim_bnb(
  n = 40,
  mean1 = 10,
  ratio = 1.2,
  dispersion = 2
)

mle_alt <- d |>
  mle_bnb_alt()

mle_null <- d |>
  mle_bnb_null()

mle_alt
mle_null

```

mle_nb

MLE for NB

Description

Maximum likelihood estimates (MLE) for two independent negative binomial outcomes.

Usage

```

mle_nb_null(
  data,
  equal_dispersion = FALSE,
  ratio_null = 1,
  method = "nlm_constrained",
  ...
)

mle_nb_alt(data, equal_dispersion = FALSE, method = "nlm_constrained", ...)

```

Arguments

data (list)
A list whose first element is the vector of negative binomial values from group 1 and the second element is the vector of negative binomial values from group 2. *NAs* are silently excluded. The default output from `sim_nb()`.

equal_dispersion	(Scalar logical: FALSE) If TRUE, the MLEs are calculated assuming both groups have the same population dispersion parameter. If FALSE (default), the MLEs are calculated assuming different dispersions.
ratio_null	(Scalar numeric: 1; (0, Inf)) The ratio of means assumed under the null hypothesis (group 2 / group 1). Typically ratio_null = 1 (no difference).
method	(string: "nlm_constrained") The optimization method. Must choose one of "nlm", "nlm_constrained", "optim", or "optim_constrained". The default bounds for constrained optimization are [1e-03, 1e06].
...	Optional arguments passed to the optimization method.

Details

These functions are primarily designed for speed in simulation. Missing values are silently excluded.

Suppose $X_1 \sim \text{NB}(\mu, \theta_1)$ and $X_2 \sim \text{NB}(r\mu, \theta_2)$, where X_1 and X_2 are independent, X_1 is the count outcome for items in group 1, X_2 is the count outcome for items in group 2, μ is the arithmetic mean count in group 1, r is the ratio of arithmetic means for group 2 with respect to group 1, θ_1 is the dispersion parameter of group 1, and θ_2 is the dispersion parameter of group 2.

The MLEs of r and μ are $\hat{r} = \frac{\bar{x}_2}{\bar{x}_1}$ and $\hat{\mu} = \bar{x}_1$. The MLEs of θ_1 and θ_2 are found by maximizing the profile log-likelihood $l(\hat{r}, \hat{\mu}, \theta_1, \theta_2)$ with respect to θ_1 and θ_2 . When $r = r_{null}$ is known, the MLE of μ is $\tilde{\mu} = \frac{n_1\bar{x}_1 + n_2\bar{x}_2}{n_1 + n_2}$ and θ_1 and θ_2 are obtained by maximizing the profile log-likelihood $l(r_{null}, \tilde{\mu}, \theta_1, \theta_2)$.

The backend method for numerical optimization is controlled by argument method which refers to `stats::nlm()`, `stats::nlminb()`, or `stats::optim()`. If you would like to see warnings from the optimizer, include argument warnings = TRUE.

Value

- For `mle_nb_alt()`, a list with the following elements:

Slot	Name	Description
1	mean1	MLE for mean of group 1.
2	mean2	MLE for mean of group 2.
3	ratio	MLE for ratio of means.
4	dispersion1	MLE for dispersion of group 1.
5	dispersion2	MLE for dispersion of group 2.
6	equal_dispersion	Were equal dispersions assumed.
7	n1	Sample size of group 1.
8	n2	Sample size of group 2.
9	nll	Minimum of negative log-likelihood.
10	nparams	Number of estimated parameters.
11	method	Method used for the results.
12	mle_method	Method used for optimization.

13	mle_code	Integer indicating why the optimization process terminated.
14	mle_message	Additional information from the optimizer.

- For `mle_nb_null()`, a list with the following elements:

Slot	Name	Description
1	mean1	MLE for mean of group 1.
2	mean2	MLE for mean of group 2.
3	ratio_null	Population ratio of means assumed for null hypothesis. $\text{mean2} = \text{mean1} * \text{ratio_null}$.
4	dispersion1	MLE for dispersion of group 1.
5	dispersion2	MLE for dispersion of group 2.
6	equal_dispersion	Were equal dispersions assumed.
7	n1	Sample size of group 1.
8	n2	Sample size of group 2.
9	nll	Minimum of negative log-likelihood.
10	nparams	Number of estimated parameters.
11	method	Method used for the results.
12	mle_method	Method used for optimization.
13	mle_code	Integer indicating why the optimization process terminated.
14	mle_message	Additional information from the optimizer.

References

Rettiganti M, Nagaraja HN (2012). “Power Analyses for Negative Binomial Models with Application to Multiple Sclerosis Clinical Trials.” *Journal of Biopharmaceutical Statistics*, **22**(2), 237–259. ISSN 1054-3406, 1520-5711, doi:[10.1080/10543406.2010.528105](https://doi.org/10.1080/10543406.2010.528105).

Aban IB, Cutter GR, Mavinga N (2009). “Inferences and power analysis concerning two negative binomial distributions with an application to MRI lesion counts data.” *Computational Statistics & Data Analysis*, **53**(3), 820–833. ISSN 01679473, doi:[10.1016/j.csda.2008.07.034](https://doi.org/10.1016/j.csda.2008.07.034).

See Also

[sim_nb\(\)](#), [nll_nb](#)

Examples

```
#-----
# mle_nb() examples
#-----
library(depower)

d <- sim_nb(
  n1 = 60,
  n2 = 40,
  mean1 = 10,
  ratio = 1.5,
  dispersion1 = 2,
  dispersion2 = 8
)
```

```

mle_alt <- d |>
  mle_nb_alt()

mle_null <- d |>
  mle_nb_null()

mle_alt
mle_null

```

nll_bnb

Negative log-likelihood for BNB

Description

The negative log-likelihood for bivariate negative binomial outcomes.

Usage

```
nll_bnb_null(param, value1, value2, ratio_null)
```

```
nll_bnb_alt(param, value1, value2)
```

Arguments

param	(numeric) The vector of initial values for BNB parameters. Must be in the following order for each scenario: <ul style="list-style-type: none"> • Null: <code>c(mean1, dispersion)</code> • Alternative: <code>c(mean1, mean2, dispersion)</code> for samples 1 and 2.
value1	(numeric) The vector of BNB values from sample 1. Must be sorted by the subject/item index. Must not contain <code>NA</code> s.
value2	(numeric) The vector of BNB values from sample 2. Must be sorted by the subject/item index. Must not contain <code>NA</code> s.
ratio_null	(Scalar numeric: $(0, \text{Inf})$) The ratio of means assumed under the null hypothesis (sample 2 / sample 1). Typically <code>ratio_null = 1</code> (no difference).

Details

These functions are primarily designed for speed in simulation. Arguments are not checked.

Suppose $X_1 | G = g \sim \text{Poisson}(\mu g)$ and $X_2 | G = g \sim \text{Poisson}(r\mu g)$ where $G \sim \text{Gamma}(\theta, \theta^{-1})$ is the random item (subject) effect. Then $X_1, X_2 \sim \text{BNB}(\mu, r, \theta)$ is the joint distribution where X_1 and X_2 are dependent (though conditionally independent), X_1 is the count outcome for sample 1 of the items (subjects), X_2 is the count outcome for sample 2 of the items (subjects), μ is the conditional mean of sample 1, r is the ratio of the conditional means of sample 2 with respect to sample 1, and θ is the gamma distribution shape parameter which controls the dispersion and the correlation between sample 1 and 2.

The likelihood is

$$L(r, \mu, \theta | X_1, X_2) = \left(\frac{\theta^\theta}{\Gamma(\theta)} \right)^n \times \frac{\mu^{\sum x_{1i} + \sum x_{2i}} r^{\sum x_{2i}}}{\prod_{i=1}^n x_{1i}! \prod_{i=1}^n x_{2i}!} \times \frac{\prod_{i=1}^n \Gamma(x_{1i} + x_{2i} + \theta)}{(\mu + r\mu + \theta)^{\sum x_{1i} + x_{2i} + \theta}}$$

and the parameter space is $\Theta = \{(r, \mu, \theta) : r, \mu, \theta > 0\}$. The log-likelihood is

$$\begin{aligned} l(r, \mu, \theta) = & n[\theta \ln \theta - \ln \Gamma(\theta)] + \\ & n(\bar{x}_1 + \bar{x}_2) \ln(\mu) + n\bar{x}_2 \ln r + \\ & \sum_{i=1}^n \ln \Gamma(x_{1i} + x_{2i} + \theta) - \\ & n(\bar{x}_1 + \bar{x}_2 + \theta) \ln(\mu + r\mu + \theta) - \\ & \sum_{i=1}^n \ln x_{1i}! - \sum_{i=1}^n \ln x_{2i}! \end{aligned}$$

Value

Scalar numeric negative log-likelihood.

References

Rettiganti M, Nagaraja HN (2012). “Power Analyses for Negative Binomial Models with Application to Multiple Sclerosis Clinical Trials.” *Journal of Biopharmaceutical Statistics*, **22**(2), 237–259. ISSN 1054-3406, 1520-5711, doi:10.1080/10543406.2010.528105.

Aban IB, Cutter GR, Mavinga N (2009). “Inferences and power analysis concerning two negative binomial distributions with an application to MRI lesion counts data.” *Computational Statistics & Data Analysis*, **53**(3), 820–833. ISSN 01679473, doi:10.1016/j.csda.2008.07.034.

See Also

`sim_nb()`, `stats::nlminb()`, `stats::nlm()`, `stats::optim()`

Examples

```

#-----
# nll_bnb*() examples
#-----
library(depower)

set.seed(1234)
d <- sim_bnb(
  n = 40,
  mean1 = 10,
  ratio = 1.2,
  dispersion = 2
)

nll_bnb_alt(
  param = c(mean1 = 10, mean2 = 12, dispersion = 2),
  value1 = d[[1L]],
  value2 = d[[2L]]
)

nll_bnb_null(
  param = c(mean = 10, dispersion = 2),
  value1 = d[[1L]],
  value2 = d[[2L]],
  ratio_null = 1
)

```

nll_nb

Negative log-likelihood for NB

Description

The negative log-likelihood for two independent samples of negative binomial distributions.

Usage

```
nll_nb_null(param, value1, value2, equal_dispersion, ratio_null)
```

```
nll_nb_alt(param, value1, value2, equal_dispersion)
```

Arguments

param (numeric)
The vector of initial values for NB parameters. Must be in the following order for each scenario:

- Null and unequal dispersion: c(mean1, dispersion1, dispersion2)
- Alternative and unequal dispersion: c(mean1, mean2, dispersion1, dispersion2)

- Null and equal dispersion: c(mean1, dispersion)
- Alternative and equal dispersion: c(mean1, mean2, dispersion)

for groups 1 and 2.

value1	(numeric)	The vector of NB values from group 1. Must not contain NAs.
value2	(numeric)	The vector of NB values from group 2. Must not contain NAs.
equal_dispersion	(Scalar logical)	If TRUE, the log-likelihood is calculated assuming both groups have the same population dispersion parameter. If FALSE (default), the log-likelihood is calculated assuming different dispersions.
ratio_null	(Scalar numeric: (0, Inf))	The ratio of means assumed under the null hypothesis (group 2 / group 1). Typically ratio_null = 1 (no difference).

Details

These functions are primarily designed for speed in simulation. Arguments are not checked.

Suppose $X_1 \sim \text{NB}(\mu, \theta_1)$ and $X_2 \sim \text{NB}(r\mu, \theta_2)$ where X_1 and X_2 are independent, X_1 is the count outcome for items in group 1, X_2 is the count outcome for items in group 2, μ is the arithmetic mean count in group 1, r is the ratio of arithmetic means for group 2 with respect to group 1, θ_1 is the dispersion parameter of group 1, and θ_2 is the dispersion parameter of group 2.

Unequal dispersion parameters:

When the dispersion parameters are not equal, the likelihood is

$$L(r, \mu, \theta_1, \theta_2 \mid X_1, X_2) = \left(\frac{\theta_1^{\theta_1}}{\Gamma(\theta_1)} \right)^{n_1} \frac{\mu^{\sum x_{1i}}}{(\mu + \theta_1)^{\sum x_{1i} + n_1 \theta_1}} \times \left(\frac{\theta_2^{\theta_2}}{\Gamma(\theta_2)} \right)^{n_2} \frac{(r\mu)^{\sum x_{2j}}}{(r\mu + \theta_2)^{\sum x_{2j} + n_2 \theta_2}} \times \prod_{i=1}^{n_1} \frac{\Gamma(x_{1i} + \theta_1)}{x_{1i}!} \prod_{j=1}^{n_2} \frac{\Gamma(x_{2j} + \theta_2)}{x_{2j}!}$$

and the parameter space is $\Theta = \{(r, \mu, \theta_1, \theta_2) : r, \mu, \theta_1, \theta_2 > 0\}$. The log-likelihood is

$$\begin{aligned} l(r, \mu, \theta_1, \theta_2) = & n_1 [\theta_1 \ln \theta_1 - \ln \Gamma(\theta_1)] + \\ & n_2 [\theta_2 \ln \theta_2 - \ln \Gamma(\theta_2)] + \\ & (n_1 \bar{x}_1 + n_2 \bar{x}_2) \ln(\mu) - n_1 (\bar{x}_1 + \theta_1) \ln(\mu + \theta_1) + \\ & n_2 \bar{x}_2 \ln(r) - n_2 (\bar{x}_2 + \theta_2) \ln(r\mu + \theta_2) + \\ & \sum_{i=1}^{n_1} (\ln \Gamma(y_{1i} + \theta_1) - \ln(y_{1i}!)) + \\ & \sum_{j=1}^{n_2} (\ln \Gamma(y_{2j} + \theta_2) - \ln(y_{2j}!)) \end{aligned}$$

Equal dispersion parameters:

When the dispersion parameters are equal, the likelihood is

$$L(r, \mu, \theta | X_1, X_2) = \left(\frac{\theta^\theta}{\Gamma(\theta)} \right)^{n_1+n_2} \times \frac{\mu^{\sum x_{1i}} (r\mu)^{\sum x_{2j}}}{(\mu + \theta)^{\sum x_{1i} + n_1\theta} (r\mu + \theta)^{\sum x_{2j} + n_2\theta}} \times \prod_{i=1}^{n_1} \frac{\Gamma(x_{1i} + \theta)}{x_{1i}!} \prod_{j=1}^{n_2} \frac{\Gamma(x_{2j} + \theta)}{x_{2j}!}$$

and the parameter space is $\Theta = \{(r, \mu, \theta) : r, \mu, \theta > 0\}$. The log-likelihood is

$$\begin{aligned} l(r, \mu, \theta) = & (n_1 + n_2) [\theta \ln \theta - \ln \Gamma(\theta)] + \\ & (n_1 \bar{x}_1 + n_2 \bar{x}_2) \ln(\mu) - n_1(\bar{x}_1 + \theta) \ln(\mu + \theta) + \\ & n_2 \bar{x}_2 \ln(r) - n_2(\bar{x}_2 + \theta) \ln(r\mu + \theta) + \\ & \sum_{i=1}^{n_1} (\ln \Gamma(y_{1i} + \theta) - \ln(y_{1i}!)) + \\ & \sum_{j=1}^{n_2} (\ln \Gamma(y_{2j} + \theta) - \ln(y_{2j}!)) \end{aligned}$$

Value

Scalar numeric negative log-likelihood.

References

Rettiganti M, Nagaraja HN (2012). “Power Analyses for Negative Binomial Models with Application to Multiple Sclerosis Clinical Trials.” *Journal of Biopharmaceutical Statistics*, **22**(2), 237–259. ISSN 1054-3406, 1520-5711, doi:10.1080/10543406.2010.528105.

Aban IB, Cutter GR, Mavinga N (2009). “Inferences and power analysis concerning two negative binomial distributions with an application to MRI lesion counts data.” *Computational Statistics & Data Analysis*, **53**(3), 820–833. ISSN 01679473, doi:10.1016/j.csda.2008.07.034.

See Also

`sim_nb()`, `stats::nlminb()`, `stats::nlm()`, `stats::optim()`

Examples

```
#-----
# nll_nb_*() examples
#-----
library(depower)

set.seed(1234)
d <- sim_nb(
```

```
n1 = 60,  
n2 = 40,  
mean1 = 10,  
ratio = 1.5,  
dispersion1 = 2,  
dispersion2 = 8  
)  
  
nll_nb_alt(  
  param = c(mean1 = 10, mean2 = 15, dispersion = 2, dispersion2 = 8),  
  value1 = d[[1L]],  
  value2 = d[[2L]],  
  equal_dispersion = FALSE  
)  
  
nll_nb_null(  
  param = c(mean = 10, dispersion = 2, dispersion2 = 8),  
  value1 = d[[1L]],  
  value2 = d[[2L]],  
  equal_dispersion = FALSE,  
  ratio_null = 1  
)
```

plot.depower

Plot power objects

Description

An automatic plot method for objects returned by `power()`.

Usage

```
## S3 method for class 'depower'  
plot(  
  x,  
  x_axis = NULL,  
  y_axis = NULL,  
  color = NULL,  
  facet_row = NULL,  
  facet_col = NULL,  
  hline = NULL,  
  caption = TRUE,  
  caption_width = 70L,  
  ...  
)
```

Arguments


x	(depover) The data frame returned by <code>power()</code> .
x_axis	(string: NULL; names(x)) The name of the column to be used for the x-axis. Automatically chosen if NULL.
y_axis	(string: NULL; names(x)) The name of the column to be used for the y-axis. Automatically chosen if NULL. Generally, "power" (default) should be used for the y-axis.
color	(string: NULL; names(x)) The name of the column to be used for the <code>ggplot2::aes()</code> color aesthetic. Automatically chosen if NULL. Use NA to turn off.
facet_row	(string: NULL; names(x)) The name of the column to be used for the <code>ggplot2::facet_grid()</code> row. Automatically chosen if NULL. Use NA to turn off.
facet_col	(string: NULL; names(x)) The name of the column to be used for the <code>ggplot2::facet_grid()</code> column. Automatically chosen if NULL. Use NA to turn off.
hline	(numeric: NULL; (0, 1)) The y-intercept at which to draw a horizontal line.
caption	(Scalar logical: TRUE) If TRUE (default), a caption is added to the plot. The caption includes information on parameter values that were conditioned on to generate the plot. If FALSE, the caption is not included.
caption_width	(Scalar integer: 70L) The target column number for wrapping the caption text.
...	Unused additional arguments.

Details

If you are limited by the output from `plot.depover()`, keep in mind that the object returned by `power()` is a standard data frame. This allows you to easily plot all results with standard plotting functions. In addition, because `plot.depover()` uses `ggplot2`, you can modify the plot as you normally would. For example:

```
set.seed(1234)
sim_log_lognormal(
  n1 = c(10, 15),
  n2 = c(10, 15),
  ratio = c(1.3, 1.5),
  cv1 = c(0.3),
  cv2 = c(0.3, 0.5),
  nsims = 1000
) |>
power(alpha = 0.05) |>
plot(hline = 0.8, caption_width = 60) +
```

```
ggplot2::theme_bw() +
ggplot2::theme(plot.caption = ggplot2::element_text(hjust = 0)) +
ggplot2::labs(title = "Power for the ratio of geometric means")
```

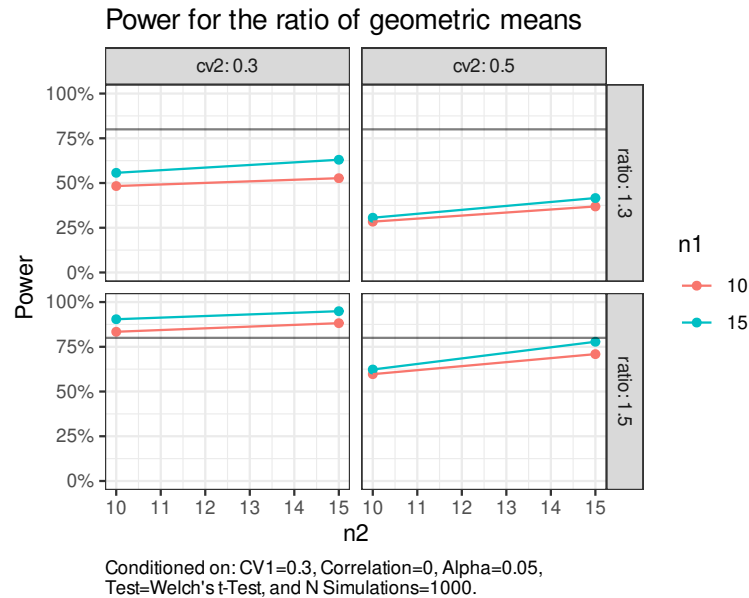

Value

A `ggplot2::ggplot()` object.

See Also

`power()`

Examples

```
#-----
# plot() examples
#-----
library(depower)

# Power for independent two-sample t-test
set.seed(1234)
sim_log_lognormal(
  n1 = c(10, 15),
  n2 = c(10, 15),
  ratio = c(1.3, 1.5),
  cv1 = c(0.3),
  cv2 = c(0.3, 0.5),
  nsims = 500
) |>
power(alpha = 0.05) |>
```

```
plot()

# Power for dependent two-sample t-test
set.seed(1234)
sim_log_lognormal(
  n1 = c(10, 15),
  n2 = c(10, 15),
  ratio = c(1.3, 1.5),
  cv1 = c(0.3, 0.5),
  cv2 = c(0.3, 0.5),
  cor = c(0.3),
  nsims = 500
) |>
  power(alpha = 0.01) |>
  plot()

# Power for two-sample independent AND two-sample dependent t-test
set.seed(1234)
sim_log_lognormal(
  n1 = c(10, 15),
  n2 = c(10, 15),
  ratio = c(1.3, 1.5),
  cv1 = c(0.3),
  cv2 = c(0.3),
  cor = c(0, 0.3, 0.6),
  nsims = 500
) |>
  power(alpha = c(0.05, 0.01)) |>
  plot(facet_row = "cor", color = "test")

# Power for one-sample t-test
set.seed(1234)
sim_log_lognormal(
  n1 = c(10, 15),
  ratio = c(1.2, 1.4),
  cv1 = c(0.3, 0.5),
  nsims = 500
) |>
  power(alpha = c(0.05, 0.01)) |>
  plot()

# Power for independent two-sample NB test
set.seed(1234)
sim_nb(
  n1 = c(10, 15),
  mean1 = 10,
  ratio = c(1.8, 2),
  dispersion1 = 10,
  dispersion2 = 3,
  nsims = 100
) |>
  power(alpha = 0.01) |>
```

```

plot()

# Power for BNB test
set.seed(1234)
sim_bnb(
  n = c(10, 12),
  mean1 = 10,
  ratio = c(1.3, 1.5),
  dispersion = 5,
  nsims = 100
) |>
power(alpha = 0.01) |>
plot()

```

power

Simulated power

Description

A method to calculate power for objects returned by [sim_log_lognormal\(\)](#), [sim_nb\(\)](#), and [sim_bnb\(\)](#).

Usage

```
power(data, ..., alpha = 0.05, list_column = FALSE, ncores = 1L)
```

Arguments

<code>data</code>	(depower) The simulated data returned by sim_log_lognormal() , sim_nb() , or sim_bnb() .
<code>...</code>	(functions) The function(s) used to perform the test. If empty, a default test function will be selected based on <code>class(data)</code> . Names are used for labeling and should be unique. If names are empty, the call coerced to character will be used for name-value pairs. See 'Details'.
<code>alpha</code>	(numeric: 0.05; (0, 1)) The expected probability of rejecting a single null hypothesis when it is actually true. See 'Details'.
<code>list_column</code>	(Scalar logical: FALSE) If TRUE, the data and result list-columns are included in the returned data frame. If FALSE (default), the data and result list-columns are not included in the returned data frame.
<code>ncores</code>	(Scalar integer: 1L; [1, Inf)) The number of cores (number of worker processes) to use. Do not set greater than the value returned by parallel::detectCores() . May be helpful when the number of parameter combinations is large and <code>nsims</code> is large.

Details

Power is calculated as the proportion of hypothesis tests which result in a p-value less than or equal to alpha. e.g.

```
sum(p <= alpha, na.rm = TRUE) / nsims
```

Power is defined as the expected probability of rejecting the null hypothesis for a chosen value of the unknown effect. In a multiple comparisons scenario, power is defined as the marginal power, which is the expected power of the test for each individual null hypothesis assumed to be false.

Other forms of power under the multiple comparisons scenario include disjunctive or conjunctive power. Disjunctive power is defined as the expected probability of correctly rejecting one or more null hypotheses. Conjunctive power is defined as the expected probability of correctly rejecting all null hypotheses. In the simplest case, and where all hypotheses are independent, if the marginal power is defined as π and m is the number of null hypotheses assumed to be false, then disjunctive power may be calculated as $1 - (1 - \pi)^m$ and conjunctive power may be calculated as π^m . Disjunctive power tends to decrease with increasingly correlated hypotheses and conjunctive power tends to increase with increasingly correlated hypotheses.

Argument ...:

... are the name-value pairs for the functions used to perform the tests. If not named, the functions coerced to character will be used for the name-value pairs. Typical in non-standard evaluation, ... accepts bare functions and converts them to a list of expressions. Each element in this list will be validated as a call and then evaluated on the simulated data. A `base::call()` is simply an unevaluated function. Below are some examples of specifying ... in `power()`.

```
# Examples of specifying ... in power()
data <- sim_nb(
  n1 = 10,
  mean1 = 10,
  ratio = c(1.6, 2),
  dispersion1 = 2,
  dispersion2 = 2,
  nsims = 200
)

# ... is empty, so an appropriate default function will be provided
power(data)

# This is equivalent to leaving ... empty
power(data, "NB Wald test" = wald_test_nb())

# If not named, "wald_test_nb()" will be used to label the function
power(data, wald_test_nb())

# You can specify any parameters in the call. The data argument
# will automatically be inserted or overwritten.
data |>
  power("NB Wald test" = wald_test_nb(equal_dispersion=TRUE, link="log"))
```



```
# Multiple functions may be used.
data |>
  power(
    wald_test_nb(link='log'),
    wald_test_nb(link='sqrt'),
    wald_test_nb(link='squared'),
    wald_test_nb(link='identity')
  )
```

```
# Just like functions in a pipe, the parentheses are required.
# This will error because wald_test_nb is missing parentheses.
try(power(data, wald_test_nb))
```

In most cases*, any user created test function may be utilized in . . . if the following conditions are satisfied:

1. The function contains argument data which is defined as a list with the first and second elements for simulated data.
2. The return object is a list with element p for the p-value of the hypothesis test.

Validate with test cases beforehand.

*Simulated data of class `log_lognormal_mixed_two_sample` has both independent and dependent data. To ensure the appropriate test function is used, `power.log_lognormal_mixed_two_sample()` allows only `t_test_welch()` and `t_test_paired()` in Each will be evaluated on the simulated data according to column `data$cor`. If one or both of these functions are not included in . . . , the corresponding default function will be used automatically. If any other test function is included, an error will be returned.

Argument alpha:

α is known as the type I assertion probability and is defined as the expected probability of rejecting a null hypothesis when it was actually true. α is compared with the p-value and used as the decision boundary for rejecting or not rejecting the null hypothesis.

The family-wise error rate is the expected probability of making one or more type I assertions among a family of hypotheses. Using Bonferroni's method, α is chosen for the family of hypotheses then divided by the number of tests performed (m). Each individual hypothesis is tested at $\frac{\alpha}{m}$. For example, if you plan to conduct 30 hypothesis tests and want to control the family-wise error rate to no greater than $\alpha = 0.05$, you would set `alpha = 0.05/30`.

The per-family error rate is the expected number of type I assertions among a family of hypotheses. If you calculate power for the scenario where you perform 1,000 hypotheses and want to control the per-family error rate to no greater than 10 type I assertions, you would choose `alpha = 10/1000`. This implicitly assumes all 1,000 hypotheses are truly null. Alternatively, if you assume 800 of these hypotheses are truly null and 200 are not, `alpha = 10/1000` would control the per-family error rate to no greater than 8 type I assertions. If it is acceptable to keep the per-family error rate as 10, setting `alpha = 10/800` would provide greater marginal power than the previous scenario.

These two methods assume that the distribution of p-values for the truly null hypotheses are uniform(0,1), but remain valid under various other testing scenarios (such as dependent tests). Other multiple comparison methods, such as FDR control, are common in practice but don't directly fit into this power simulation framework.

Column nsims:

The final number of valid simulations per unique set of simulation parameters may be less than the original number requested. This may occur when the test results in a missing p-value. For `wald_test_bnb()`, pathological MLE estimates, generally from small sample sizes and very small dispersions, may result in a negative estimated standard deviation of the ratio. Thus the test statistic and p-value would not be calculated. Note that simulated data from `sim_nb()` and `sim_bnb()` may also reduce `nsims` during the data simulation phase.

The `nsims` column in the return data frame is the effective number of simulations for power results.

Value

A data frame with the following columns appended to the data object:

Column	Name	Description
	<code>alpha</code>	Type I assertion probability.
	<code>test</code>	Name-value pair of the function and statistical test: <code>c(as.character(...)) = names(...)</code> .
	<code>data</code>	List-column of simulated data.
	<code>result</code>	List-column of test results.
	<code>power</code>	Power of the test for corresponding parameters.

For `power(list_column = FALSE)`, columns `data`, and `result` are excluded from the data frame.

References

- Yu L, Fernandez S, Brock G (2017). “Power analysis for RNA-Seq differential expression studies.” *BMC Bioinformatics*, **18**(1), 234. ISSN 1471-2105, doi:[10.1186/s1285901716482](https://doi.org/10.1186/s1285901716482).
- Yu L, Fernandez S, Brock G (2020). “Power analysis for RNA-Seq differential expression studies using generalized linear mixed effects models.” *BMC Bioinformatics*, **21**(1), 198. ISSN 1471-2105, doi:[10.1186/s1285902035417](https://doi.org/10.1186/s1285902035417).
- Rettiganti M, Nagaraja HN (2012). “Power Analyses for Negative Binomial Models with Application to Multiple Sclerosis Clinical Trials.” *Journal of Biopharmaceutical Statistics*, **22**(2), 237–259. ISSN 1054-3406, 1520-5711, doi:[10.1080/10543406.2010.528105](https://doi.org/10.1080/10543406.2010.528105).
- Aban IB, Cutter GR, Mavinga N (2009). “Inferences and power analysis concerning two negative binomial distributions with an application to MRI lesion counts data.” *Computational Statistics & Data Analysis*, **53**(3), 820–833. ISSN 01679473, doi:[10.1016/j.csda.2008.07.034](https://doi.org/10.1016/j.csda.2008.07.034).
- Julious SA (2004). “Sample sizes for clinical trials with Normal data.” *Statistics in Medicine*, **23**(12), 1921–1986. doi:[10.1002/sim.1783](https://doi.org/10.1002/sim.1783).
- Vickerstaff V, Omar RZ, Ambler G (2019). “Methods to adjust for multiple comparisons in the analysis and sample size calculation of randomised controlled trials with multiple primary outcomes.” *BMC Medical Research Methodology*, **19**(1), 129. ISSN 1471-2288, doi:[10.1186/s1287401907544](https://doi.org/10.1186/s1287401907544).

See Also

[plot.depower\(\)](#)

Examples

```
#-----  
# power() examples  
#-----  
library(depower)  
  
# Power for independent two-sample t-Test  
set.seed(1234)  
data <- sim_log_lognormal(  
  n1 = 20,  
  n2 = 20,  
  ratio = c(1.2, 1.4),  
  cv1 = 0.4,  
  cv2 = 0.4,  
  cor = 0,  
  nsims = 1000  
)  
  
# Welch's t-test is used by default  
power(data)  
  
# But you can specify anything else that is needed  
power(  
  data = data,  
  "Welch's t-Test" = t_test_welch(alternative = "greater"),  
  alpha = 0.01  
)  
  
# Power for dependent two-sample t-Test  
set.seed(1234)  
sim_log_lognormal(  
  n1 = 20,  
  n2 = 20,  
  ratio = c(1.2, 1.4),  
  cv1 = 0.4,  
  cv2 = 0.4,  
  cor = 0.5,  
  nsims = 1000  
) |>  
power()  
  
# Power for mixed-type two-sample t-Test  
set.seed(1234)  
sim_log_lognormal(  
  n1 = 20,  
  n2 = 20,  
  ratio = c(1.2, 1.4),  
  cv1 = 0.4,  
  cv2 = 0.4,  
  cor = c(0, 0.5),  
  nsims = 1000  
) |>
```

```
power()

# Power for one-sample t-Test
set.seed(1234)
sim_log_lognormal(
  n1 = 20,
  ratio = c(1.2, 1.4),
  cv1 = 0.4,
  nsims = 1000
) |>
power()

# Power for independent two-sample NB test
set.seed(1234)
sim_nb(
  n1 = 10,
  mean1 = 10,
  ratio = c(1.6, 2),
  dispersion1 = 2,
  dispersion2 = 2,
  nsims = 200
) |>
power()

# Power for BNB test
set.seed(1234)
sim_bnb(
  n = 10,
  mean1 = 10,
  ratio = c(1.4, 1.6),
  dispersion = 10,
  nsims = 200
) |>
power()
```

sim_bnb

Simulate data from a BNB distribution

Description

Simulate data from the bivariate negative binomial (BNB) distribution. The BNB distribution is used to simulate count data where the event counts are jointly dependent (correlated). For independent data, see [sim_nb\(\)](#).

Usage

```
sim_bnb(
  n,
  mean1,
```

```

    mean2,
    ratio,
    dispersion,
    nsims = 1L,
    return_type = "list",
    max_zeros = 0.99,
    ncores = 1L
  )

```

Arguments

n	(integer: [2, Inf]) The number(s) of paired observations.
mean1	(numeric: (0, Inf)) The mean(s) of sample 1 (μ_1).
mean2, ratio	(numeric: (0, Inf)) Only specify one of these arguments. <ul style="list-style-type: none"> • mean2: The mean(s) of sample 2 (μ_2). • ratio: The ratio(s) of means for sample 2 with respect to sample 1 ($r = \frac{\mu_2}{\mu_1}$). $\text{mean2} = \text{ratio} * \text{mean1}$
dispersion	(numeric: (0, Inf)) The gamma distribution shape parameter(s) (θ) which control the dispersion and the correlation between sample 1 and 2. See 'Details' and 'Examples'.
nsims	(Scalar integer: 1L; [1, Inf]) The expected number of simulated data sets. If $\text{nsims} > 1$, the data is returned in a list-column of a depower simulation data frame. nsims may be reduced depending on max_zeros .
return_type	(string: "list"; c("list", "data.frame")) The data structure of the simulated data. If "list" (default), a list object is returned. If "data.frame" a data frame in tall format is returned. The list object provides computational efficiency and the data frame object is convenient for formulas. See 'Value'.
max_zeros	(Scalar numeric: 0.99; [0, 1]) The maximum proportion of zeros each group in a simulated dataset is allowed to have. If the proportion of zeros is greater than this value, the corresponding data is excluded from the set of simulations. This is most likely to occur when the sample size is small and the dispersion parameter is small.
ncores	(Scalar integer: 1L; [1, Inf]) The number of cores (number of worker processes) to use. Do not set greater than the value returned by <code>parallel::detectCores()</code> . May be helpful when the number of parameter combinations is large and nsims is large.

Details

The negative binomial distribution may be defined using a gamma-Poisson mixture distribution. In this case, the Poisson parameter λ is a random variable with gamma distribution. Equivalence between different parameterizations are demonstrated below:

```
# Define constants and their relationships
n <- 10000
dispersion <- 8
mu <- 4
p <- dispersion / (dispersion + mu)
q <- mu / (mu + dispersion)
variance <- mu + (mu^2 / dispersion)
rate <- p / (1 - p)
scale <- (1 - p) / p

# alternative formula for mu
mu_alt <- (dispersion * (1 - p)) / p
stopifnot(isTRUE(all.equal(mu, mu_alt)))

set.seed(20240321)

# Using built-in rnbinom with dispersion and mean
w <- rnbinom(n = n, size = dispersion, mu = mu)

# Using gamma-Poisson mixture with gamma rate parameter
x <- rpois(
  n = n,
  lambda = rgamma(n = n, shape = dispersion, rate = rate)
)

# Using gamma-Poisson mixture with gamma scale parameter
y <- rpois(
  n = n,
  lambda = rgamma(n = n, shape = dispersion, scale = scale)
)


# Using gamma-Poisson mixture with multiplicative mean and
# gamma scale parameter
z <- rpois(
  n = n,
  lambda = mu * rgamma(n = n, shape = dispersion, scale = 1/dispersion)
)

# Compare CDFs
par(mar=c(4,4,1,1))
plot(
  x = sort(w),
  y = (1:n)/n,
  xlim = range(c(w,x,y,z)),
  ylim = c(0,1),
  col = 'green',
  lwd = 4,
  type = 'l',
```

```

    main = 'CDF'
  )
  lines(x = sort(x), y = (1:n)/n, col = 'red', lwd = 2)
  lines(x = sort(y), y = (1:n)/n, col = 'yellow', lwd = 1.5)
  lines(x = sort(z), y = (1:n)/n, col = 'black')

```

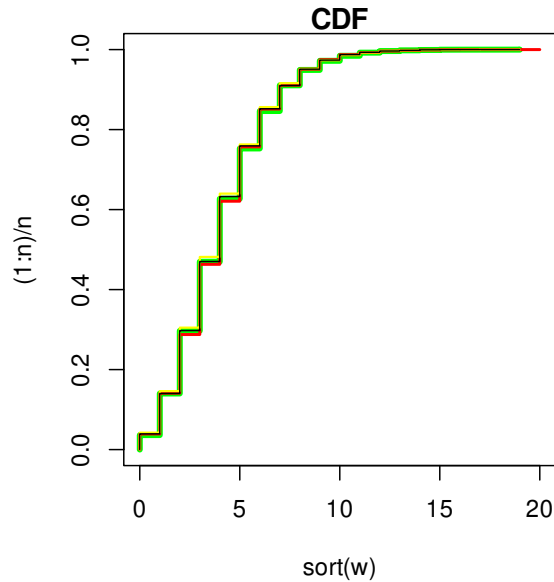

The BNB distribution is implemented by compounding two conditionally independent Poisson random variables $X_1 | G = g \sim \text{Poisson}(\mu g)$ and $X_2 | G = g \sim \text{Poisson}(r\mu g)$ with a gamma random variable $G \sim \text{Gamma}(\theta, \theta^{-1})$. The probability mass function for the joint distribution of X_1, X_2 is

$$P(X_1 = x_1, X_2 = x_2) = \frac{\Gamma(x_1 + x_2 + \theta)}{(\mu + r\mu + \theta)^{x_1 + x_2 + \theta}} \frac{\mu^{x_1}}{x_1!} \frac{(r\mu)^{x_2}}{x_2!} \frac{\theta^\theta}{\Gamma(\theta)}$$

where $x_1, x_2 \in \mathbb{N}^{\geq 0}$ are specific values of the count outcomes, $\theta \in \mathbb{R}^{>0}$ is the dispersion parameter which controls the dispersion and level of correlation between the two samples (otherwise known as the shape parameter of the gamma distribution), $\mu \in \mathbb{R}^{>0}$ is the mean parameter, and $r = \frac{\mu_2}{\mu_1} \in \mathbb{R}^{>0}$ is the ratio parameter representing the multiplicative change in the mean of the second sample relative to the first sample. G denotes the random subject effect and the gamma distribution scale parameter is assumed to be the inverse of the dispersion parameter (θ^{-1}) for identifiability.

Correlation decreases from 1 to 0 as the dispersion parameter increases from 0 to infinity. For a given dispersion, increasing means also increases the correlation. See 'Examples' for a demonstration.

See 'Details' in `sim_nb()` for additional information on the negative binomial distribution.

Value

If `nsims = 1` and the number of unique parameter combinations is one, the following objects are returned:

- If `return_type = "list"`, a list:

Slot	Name	Description
1		Simulated counts from sample 1.
2		Simulated counts from sample 2.

- If `return_type = "data.frame"`, a data frame:

Column	Name	Description
1	item	Subject/item indicator.
2	condition	Sample/condition indicator.
3	value	Simulated counts.

If `nsims > 1` or the number of unique parameter combinations is greater than one, each object described above is returned in a list-column named `data` in a `depower` simulation data frame:

Column	Name	Description
1	n1	Sample size of sample 1.
2	n2	Sample size of sample 2.
3	mean1	Mean for sample 1.
4	mean2	Mean for sample 2.
5	ratio	Ratio of means (sample 2 / sample 1).
6	dispersion	Gamma distribution shape parameter (dispersion).
7	nsims	Number of valid simulation iterations.
8	distribution	Distribution sampled from.
9	data	List-column of simulated data.

References

Yu L, Fernandez S, Brock G (2020). "Power analysis for RNA-Seq differential expression studies using generalized linear mixed effects models." *BMC Bioinformatics*, **21**(1), 198. ISSN 1471-2105, doi:[10.1186/s1285902035417](https://doi.org/10.1186/s1285902035417).

Rettiganti M, Nagaraja HN (2012). "Power Analyses for Negative Binomial Models with Application to Multiple Sclerosis Clinical Trials." *Journal of Biopharmaceutical Statistics*, **22**(2), 237–259. ISSN 1054-3406, 1520-5711, doi:[10.1080/10543406.2010.528105](https://doi.org/10.1080/10543406.2010.528105).

Aban IB, Cutter GR, Mavinga N (2009). "Inferences and power analysis concerning two negative binomial distributions with an application to MRI lesion counts data." *Computational Statistics & Data Analysis*, **53**(3), 820–833. ISSN 01679473, doi:[10.1016/j.csda.2008.07.034](https://doi.org/10.1016/j.csda.2008.07.034).

See Also

`sim_nb()`, `stats::rpois()`, `stats::rgamma()`, `stats::rnbinom()`

Examples

```
#-----
# sim_bnb() examples
#-----
library(depower)
```



```
# Paired two-sample data returned in a data frame
sim_bnb(
  n = 10,
  mean1 = 10,
  ratio = 1.6,
  dispersion = 3,
  nsims = 1,
  return_type = "data.frame"
)

# Paired two-sample data returned in a list
sim_bnb(
  n = 10,
  mean1 = 10,
  ratio = 1.6,
  dispersion = 3,
  nsims = 1,
  return_type = "list"
)

# Two simulations of paired two-sample data
# returned as a list of data frames
sim_bnb(
  n = 10,
  mean1 = 10,
  ratio = 1.6,
  dispersion = 3,
  nsims = 2,
  return_type = "data.frame"
)

# Two simulations of Paired two-sample data
# returned as a list of lists
sim_bnb(
  n = 10,
  mean1 = 10,
  ratio = 1.6,
  dispersion = 3,
  nsims = 2,
  return_type = "list"
)

#-----
# Visualization of the BNB distribution as dispersion varies.
#-----
set.seed(1234)
data <- lapply(
  X = c(1, 10, 100, 1000),
  FUN = function(x) {
    d <- sim_bnb(
      n = 1000,
      mean1 = 10,
```

```

    ratio = 1.5,
    dispersion = x,
    nsims = 1,
    return_type = "data.frame"
  )
  cor <- cor(
    x = d[d$condition == "1", ]$value,
    y = d[d$condition == "2", ]$value
  )
  cbind(dispersion = x, correlation = cor, d)
}
)

data <- do.call(what = "rbind", args = data)

ggplot2::ggplot(
  data = data,
  mapping = ggplot2::aes(x = value, fill = condition)
) +
  ggplot2::facet_wrap(
    facets = ggplot2::vars(.data$dispersion),
    ncol = 2,
    labeller = ggplot2::labeller(.rows = ggplot2::label_both)
  ) +
  ggplot2::geom_density(alpha = 0.3) +
  ggplot2::coord_cartesian(xlim = c(0, 60)) +
  ggplot2::geom_text(
    mapping = ggplot2::aes(
      x = 30,
      y = 0.12,
      label = paste0("Correlation: ", round(correlation, 2))
    ),
    check_overlap = TRUE
  ) +
  ggplot2::labs(
    x = "Value",
    y = "Density",
    fill = "Condition",
    caption = "Mean1=10, Mean2=15, ratio=1.5"
  )
)

```

 sim_log_lognormal

Simulate data from a normal distribution

Description

Simulate data from the log transformed lognormal distribution (i.e. a normal distribution). This function handles all three cases:

1. One-sample data

2. Dependent two-sample data
3. Independent two-sample data

Usage

```
sim_log_lognormal(
  n1,
  n2 = NULL,
  ratio,
  cv1,
  cv2 = NULL,
  cor = 0,
  nsims = 1L,
  return_type = "list",
  ncores = 1L,
  messages = TRUE
)
```

Arguments

n1	(integer: [2, Inf]) The sample size(s) of sample 1.
n2	(integer: NULL; [2, Inf]) The sample size(s) of sample 2. Set as NULL if you want to simulate for the one-sample case.
ratio	(numeric: (0, Inf)) The assumed population fold change(s) of sample 2 with respect to sample 1. <ul style="list-style-type: none"> • For one-sample data, <code>ratio</code> is defined as the geometric mean (GM) of the original lognormal population distribution. • For dependent two-sample data, <code>ratio</code> is defined by GM(sample 2 / sample 1) of the original lognormal population distributions. <ul style="list-style-type: none"> – e.g. <code>ratio = 2</code> assumes that the geometric mean of all paired ratios (sample 2 / sample 1) is 2. • For independent two-sample data, the <code>ratio</code> is defined by GM(group 2) / GM(group 1) of the original lognormal population distributions. <ul style="list-style-type: none"> – e.g. <code>ratio = 2</code> assumes that the geometric mean of sample 2 is 2 times larger than the geometric mean of sample 1. <p>See 'Details' for additional information.</p>
cv1	(numeric: (0, Inf)) The coefficient of variation(s) of sample 1 in the original lognormal data.
cv2	(numeric: NULL; (0, Inf)) The coefficient of variation(s) of sample 2 in the original lognormal data. Set as NULL if you want to simulate for the one-sample case.
cor	(numeric: 0; [-1, 1]) The correlation(s) between sample 1 and sample 2 in the original lognormal data. Not used for the one-sample case.

nsims	(Scalar integer: 1L; [1, Inf)) The number of simulated data sets. If nsims > 1, the data is returned in a list-column of a depower simulation data frame.
return_type	(string: "list"; c("list", "data.frame")) The data structure of the simulated data. If "list" (default), a list object is returned. If "data.frame" a data frame in tall format is returned. The list object provides computational efficiency and the data frame object is convenient for formulas. See 'Value'.
ncores	(Scalar integer: 1L; [1, Inf)) The number of cores (number of worker processes) to use. Do not set greater than the value returned by <code>parallel::detectCores()</code> . May be helpful when the number of parameter combinations is large and nsims is large.
messages	(Scalar logical: TRUE) Whether or not to display messages for pathological simulation cases.

Details

Based on assumed characteristics of the original lognormal distribution, data is simulated from the corresponding log-transformed (normal) distribution. This simulated data is suitable for assessing power of a hypothesis for the geometric mean or ratio of geometric means from the original lognormal data.

This method can also be useful for other population distributions which are positive and where it makes sense to describe the ratio of geometric means. However, the lognormal distribution is theoretically correct in the sense that you can log transform to a normal distribution, compute the summary statistic, then apply the inverse transformation to summarize on the original lognormal scale.

Let $GM(\cdot)$ be the geometric mean and $AM(\cdot)$ be the arithmetic mean. For independent lognormal samples X_1 and X_2

$$\text{Fold Change} = \frac{GM(X_2)}{GM(X_1)}$$

For dependent lognormal samples X_1 and X_2

$$\text{Fold Change} = GM\left(\frac{X_2}{X_1}\right)$$

Unlike ratios and the arithmetic mean, for equal sample sizes of X_1 and X_2 it follows that $\frac{GM(X_2)}{GM(X_1)} = GM\left(\frac{X_2}{X_1}\right) = e^{AM(\ln X_2) - AM(\ln X_1)} = e^{AM(\ln X_2 - \ln X_1)}$.

The coefficient of variation (CV) for X is defined as

$$CV = \frac{SD(X)}{AM(X)}$$

The relationship between sample statistics for the original lognormal data (X) and the natural logged data ($\ln X$) are

$$\begin{aligned}
AM(X) &= e^{AM(\ln X) + \frac{Var(\ln X)}{2}} \\
GM(X) &= e^{AM(\ln X)} \\
Var(X) &= AM(X)^2 \left(e^{Var(\ln X)} - 1 \right) \\
CV(X) &= \frac{\sqrt{AM(X)^2 \left(e^{Var(\ln X)} - 1 \right)}}{AM(X)} \\
&= \sqrt{e^{Var(\ln X)} - 1}
\end{aligned}$$

and

$$\begin{aligned}
AM(\ln X) &= \ln \left(\frac{AM(X)}{\sqrt{CV(X)^2 + 1}} \right) \\
Var(\ln X) &= \ln(CV(X)^2 + 1) \\
Cor(\ln X_1, \ln X_2) &= \frac{\ln(Cor(X_1, X_2)CV(X_1)CV(X_2) + 1)}{SD(\ln X_1)SD(\ln X_2)}
\end{aligned}$$

Based on the properties of correlation and variance,

$$\begin{aligned}
Var(X_2 - X_1) &= Var(X_1) + Var(X_2) - 2Cov(X_1, X_2) \\
&= Var(X_1) + Var(X_2) - 2Cor(X_1, X_2)SD(X_1)SD(X_2) \\
SD(X_2 - X_1) &= \sqrt{Var(X_2 - X_1)}
\end{aligned}$$

The standard deviation of the differences gets smaller the more positive the correlation and conversely gets larger the more negative the correlation. For the special case where the two samples are uncorrelated and each has the same variance, it follows that

$$\begin{aligned}
Var(X_2 - X_1) &= \sigma^2 + \sigma^2 \\
SD(X_2 - X_1) &= \sqrt{2}\sigma
\end{aligned}$$

Value

If `nsims = 1` and the number of unique parameter combinations is one, the following objects are returned:

- If one-sample data with `return_type = "list"`, a list:

Slot	Name	Description
1		One sample of simulated normal values.

- If one-sample data with `return_type = "data.frame"`, a data frame:

Column	Name	Description
1	item	Pair/subject/item indicator.
2	value	Simulated normal values.

- If two-sample data with `return_type = "list"`, a list:

Slot	Name	Description
1		Simulated normal values from sample 1.
2		Simulated normal values from sample 2.

- If two-sample data with `return_type = "data.frame"`, a data frame:

Column	Name	Description
1	item	Pair/subject/item indicator.
2	condition	Time/group/condition indicator.
3	value	Simulated normal values.

If `nsims > 1` or the number of unique parameter combinations is greater than one, each object described above is returned in data frame, located in a list-column named `data`.

- If one-sample data, a data frame:

Column	Name	Description
1	n1	The sample size.
2	ratio	Geometric mean [GM(sample 1)].
3	cv1	Coefficient of variation for sample 1.
4	nsims	Number of data simulations.
5	distribution	Distribution sampled from.
6	data	List-column of simulated data.

- If two-sample data, a data frame:

Column	Name	Description
1	n1	Sample size of sample 1.
2	n2	Sample size of sample 2.
3	ratio	Ratio of geometric means [GM(sample 2) / GM(sample 1)] or geometric mean ratio [GM(sample 2) / GM(sample 1)].
4	cv1	Coefficient of variation for sample 1.
5	cv2	Coefficient of variation for sample 2.
6	cor	Correlation between samples.
7	nsims	Number of data simulations.
8	distribution	Distribution sampled from.
9	data	List-column of simulated data.

References

- Julious SA (2004). "Sample sizes for clinical trials with Normal data." *Statistics in Medicine*, **23**(12), 1921–1986. doi:10.1002/sim.1783.
- Hauschke D, Steinijans VW, Diletti E, Burke M (1992). "Sample size determination for bioequivalence assessment using a multiplicative model." *Journal of Pharmacokinetics and Biopharmaceutics*, **20**(5), 557–561. ISSN 0090-466X, doi:10.1007/BF01061471.
- Johnson NL, Kotz S, Balakrishnan N (1994). *Continuous univariate distributions*, Wiley series in probability and mathematical statistics, 2nd ed edition. Wiley, New York. ISBN 9780471584957 9780471584940.

See Also

[stats::rnorm\(\)](#), [mvnfast::rmvn\(\)](#)

Examples

```
#-----  
# sim_log_lognormal() examples  
#-----  
library(depower)  
  
# Independent two-sample data returned in a data frame  
sim_log_lognormal(  
  n1 = 10,  
  n2 = 10,  
  ratio = 1.3,  
  cv1 = 0.35,  
  cv2 = 0.35,  
  cor = 0,  
  nsims = 1,  
  return_type = "data.frame"  
)  
  
# Independent two-sample data returned in a list  
sim_log_lognormal(  
  n1 = 10,  
  n2 = 10,  
  ratio = 1.3,  
  cv1 = 0.35,  
  cv2 = 0.35,  
  cor = 0,  
  nsims = 1,  
  return_type = "list"  
)  
  
# Dependent two-sample data returned in a data frame  
sim_log_lognormal(  
  n1 = 10,  
  n2 = 10,  
  ratio = 1.3,  
  cv1 = 0.35,  
  cv2 = 0.35,  
  cor = 0.4,  
  nsims = 1,  
  return_type = "data.frame"  
)  
  
# Dependent two-sample data returned in a list  
sim_log_lognormal(  
  n1 = 10,  
  n2 = 10,  
  ratio = 1.3,  
  cv1 = 0.35,
```

```
    cv2 = 0.35,
    cor = 0.4,
    nsims = 1,
    return_type = "list"
  )

# One-sample data returned in a data frame
sim_log_lognormal(
  n1 = 10,
  ratio = 1.3,
  cv1 = 0.35,
  nsims = 1,
  return_type = "data.frame"
)

# One-sample data returned in a list
sim_log_lognormal(
  n1 = 10,
  ratio = 1.3,
  cv1 = 0.35,
  nsims = 1,
  return_type = "list"
)

# Independent two-sample data: two simulations for four parameter combinations.
# Returned as a list-column of lists within a data frame
sim_log_lognormal(
  n1 = c(10, 20),
  n2 = c(10, 20),
  ratio = 1.3,
  cv1 = 0.35,
  cv2 = 0.35,
  cor = 0,
  nsims = 2,
  return_type = "list"
)

# Dependent two-sample data: two simulations for two parameter combinations.
# Returned as a list-column of lists within a data frame
sim_log_lognormal(
  n1 = c(10, 20),
  n2 = c(10, 20),
  ratio = 1.3,
  cv1 = 0.35,
  cv2 = 0.35,
  cor = 0.4,
  nsims = 2,
  return_type = "list"
)

# One-sample data: two simulations for two parameter combinations
# Returned as a list-column of lists within a data frame
sim_log_lognormal(
```



```

n1 = c(10, 20),
ratio = 1.3,
cv1 = 0.35,
nsims = 2,
return_type = "list"
)

```

sim_nb

Simulate data from a NB distribution

Description

Simulate data from two independent negative binomial (NB) distributions. For paired data, see [sim_bnb\(\)](#).

Usage

```

sim_nb(
  n1,
  n2 = n1,
  mean1,
  mean2,
  ratio,
  dispersion1,
  dispersion2 = dispersion1,
  nsims = 1L,
  return_type = "list",
  max_zeros = 0.99,
  ncores = 1L
)

```

Arguments

n1	(integer: [2, Inf)) The sample size(s) of group 1.
n2	(integer: n1; [2, Inf)) The sample size(s) of group 2.
mean1	(numeric: (0, Inf)) The mean(s) of group 1 (μ_1).
mean2, ratio	(numeric: (0, Inf)) Only specify one of these arguments. <ul style="list-style-type: none"> • mean2: The mean(s) of group 2 (μ_2). • ratio: The ratio(s) of means for group 2 with respect to group 1 ($r = \frac{\mu_2}{\mu_1}$). $\text{mean2} = \text{ratio} * \text{mean1}$

dispersion1	(numeric: (0, Inf)) The dispersion parameter(s) of group 1 (θ_1). See 'Details' and 'Examples'.
dispersion2	(numeric: dispersion1; (0, Inf)) The dispersion parameter(s) of group 2 (θ_2). See 'Details' and 'Examples'.
nsims	(Scalar integer: 1L; [1, Inf)) The expected number of simulated data sets. If $nsims > 1$, the data is returned in a list-column of a depower simulation data frame. $nsims$ may be reduced depending on max_zeros .
return_type	(string: "list"; c("list", "data.frame")) The data structure of the simulated data. If "list" (default), a list object is returned. If "data.frame" a data frame in tall format is returned. The list object provides computational efficiency and the data frame object is convenient for formulas. See 'Value'.
max_zeros	(Scalar numeric: 0.99; [0, 1]) The maximum proportion of zeros each group in a simulated dataset is allowed to have. If the proportion of zeros is greater than this value, the corresponding data is excluded from the set of simulations. This is most likely to occur when the sample size is small and the dispersion parameter is small.
ncores	(Scalar integer: 1L; [1, Inf)) The number of cores (number of worker processes) to use. Do not set greater than the value returned by <code>parallel::detectCores()</code> . May be helpful when the number of parameter combinations is large and $nsims$ is large.

Details

The negative binomial distribution has many parameterizations. In the regression modeling context, it is common to specify the distribution in terms of its mean and dispersion. We use the following probability mass function:

$$\begin{aligned}
 P(X = x) &= \binom{x + \theta - 1}{x} \left(\frac{\theta}{\theta + \mu} \right)^\theta \left(\frac{\mu}{\mu + \theta} \right)^x \\
 &= \frac{\Gamma(x + \theta)}{x! \Gamma(\theta)} \left(\frac{\theta}{\theta + \mu} \right)^\theta \left(\frac{\mu}{\mu + \theta} \right)^x \\
 &= \frac{\Gamma(x + \theta)}{(\theta + \mu)^{\theta + x}} \frac{\theta^\theta}{\Gamma(\theta)} \frac{\mu^x}{x!}
 \end{aligned}$$

where $x \in \mathbb{N}^{\geq 0}$, $\theta \in \mathbb{R}^{>0}$ is the dispersion parameter, and $\mu \in \mathbb{R}^{>0}$ is the mean. This is analogous to the typical formulation where X is counting x failures given θ successes and $p = \frac{\theta}{\theta + \mu}$ is the probability of success on each trial. It follows that $E(X) = \mu$ and $Var(X) = \mu + \frac{\mu^2}{\theta}$. The θ parameter describes the 'dispersion' among observations. Smaller values of θ lead to overdispersion and larger values of θ decrease the overdispersion, eventually converging to the Poisson distribution.

Described above is the 'indirect quadratic parameterization' of the negative binomial distribution, which is commonly found in the R ecosystem. However, it is somewhat counterintuitive because the smaller θ gets, the larger the overdispersion. The 'direct quadratic parameterization' of the negative binomial distribution may be found in some R packages and other languages such as SAS

and Stata. The direct parameterization is defined by substituting $\alpha = \frac{1}{\theta}$ ($\alpha > 0$) which results in $Var(X) = \mu + \alpha\mu^2$. In this case, the larger α gets the larger the overdispersion, and the Poisson distribution is a special case of the negative binomial distribution where $\alpha = 0$.

A general class of negative binomial models may be defined with mean μ and variance $\mu + \alpha\mu^p$. The 'linear parameterization' is then found by setting $p = 1$, resulting in $Var(X) = \mu + \alpha\mu$. It's common to label the linear parameterization as 'NB1' and the direct quadratic parameterization as 'NB2'.

See 'Details' in `sim_bnb()` for additional information on the gamma-Poisson mixture formulation of the negative binomial distribution.

Value

If `nsims = 1` and the number of unique parameter combinations is one, the following objects are returned:

- If `return_type = "list"`, a list:

Slot	Name	Description
1		Simulated counts from group 1.
2		Simulated counts from group 2.

- If `return_type = "data.frame"`, a data frame:

Column	Name	Description
1	item	Subject/item indicator.
2	condition	Group/condition indicator.
3	value	Simulated counts.

If `nsims > 1` or the number of unique parameter combinations is greater than one, each object described above is returned in a list-column named `data` in a depower simulation data frame:

Column	Name	Description
1	n1	Sample size of group 1.
2	n2	Sample size of group 2.
3	mean1	Mean for group 1.
4	mean2	Mean for group 2.
5	ratio	Ratio of means (group 2 / group 1).
6	dispersion1	Dispersion parameter for group 1.
7	dispersion2	Dispersion parameter for group 2.
8	nsims	Number of valid simulation iterations.
9	distribution	Distribution sampled from.
10	data	List-column of simulated data.

References

Yu L, Fernandez S, Brock G (2017). "Power analysis for RNA-Seq differential expression studies." *BMC Bioinformatics*, **18**(1), 234. ISSN 1471-2105, doi:10.1186/s1285901716482.

Rettiganti M, Nagaraja HN (2012). “Power Analyses for Negative Binomial Models with Application to Multiple Sclerosis Clinical Trials.” *Journal of Biopharmaceutical Statistics*, **22**(2), 237–259. ISSN 1054-3406, 1520-5711, doi:10.1080/10543406.2010.528105.

Aban IB, Cutter GR, Mavinga N (2009). “Inferences and power analysis concerning two negative binomial distributions with an application to MRI lesion counts data.” *Computational Statistics & Data Analysis*, **53**(3), 820–833. ISSN 01679473, doi:10.1016/j.csda.2008.07.034.

Hilbe JM (2011). *Negative Binomial Regression*, 2 edition. Cambridge University Press. ISBN 9780521198158 9780511973420, doi:10.1017/CBO9780511973420.

Hilbe JM (2014). *Modeling count data*. Cambridge University Press, New York, NY. ISBN 9781107028333 9781107611252, doi:10.1017/CBO9781139236065.

Cameron AC, Trivedi PK (2013). *Regression Analysis of Count Data*, Econometric Society Monographs, 2 edition. Cambridge University Press. doi:10.1017/CBO9781139013567.

See Also

[sim_bnb\(\)](#), [stats::rnbinom\(\)](#)

Examples

```
#-----  
# sim_nb() examples  
#-----  
library(depower)  
  
# Independent two-sample NB data returned in a data frame  
sim_nb(  
  n1 = 10,  
  mean1 = 5,  
  ratio = 1.6,  
  dispersion1 = 0.5,  
  dispersion2 = 0.5,  
  nsims = 1,  
  return_type = "data.frame"  
)  
  
# Independent two-sample NB data returned in a list  
sim_nb(  
  n1 = 10,  
  mean1 = 5,  
  ratio = 1.6,  
  dispersion1 = 0.5,  
  dispersion2 = 0.5,  
  nsims = 1,  
  return_type = "list"  
)  
  
# Two simulations of independent two-sample data  
# returned as a list of data frames  
sim_nb(  
  n1 = 10,
```

```

    mean1 = 5,
    ratio = 1.6,
    dispersion1 = 0.5,
    dispersion2 = 0.5,
    nsims = 2,
    return_type = "data.frame"
  )

# Two simulations of independent two-sample data
# returned as a list of lists
sim_nb(
  n1 = 10,
  mean1 = 5,
  ratio = 1.6,
  dispersion1 = 0.5,
  dispersion2 = 0.5,
  nsims = 2,
  return_type = "list"
)

#-----
# Visualization of the NB distribution as dispersion varies between groups.
#-----
disp <- expand.grid(c(1, 10, 100), c(1, 10, 100))
set.seed(1234)
data <- mapply(
  FUN = function(disp1, disp2) {
    d <- sim_nb(
      n1 = 1000,
      mean1 = 10,
      ratio = 1.5,
      dispersion1 = disp1,
      dispersion2 = disp2,
      nsims = 1,
      return_type = "data.frame"
    )
    cbind(dispersion1 = disp1, dispersion2 = disp2, d)
  },
  disp1 = disp[[1]],
  disp2 = disp[[2]],
  SIMPLIFY = FALSE
)

data <- do.call(what = "rbind", args = data)

ggplot2::ggplot(
  data = data,
  mapping = ggplot2::aes(x = value, fill = condition)
) +
  ggplot2::facet_grid(
    rows = ggplot2::vars(.data$dispersion2),
    cols = ggplot2::vars(.data$dispersion1),
    labeller = ggplot2::labeller(

```

```

    .rows = ggplot2::label_both,
    .cols = ggplot2::label_both
  )
) +
ggplot2::geom_density(alpha = 0.3) +
ggplot2::coord_cartesian(xlim = c(0, 50)) +
ggplot2::labs(
  x = "Value",
  y = "Density",
  fill = "Condition",
  caption = "Mean1=10, Mean2=15, ratio=1.5"
)

```

t_test_paired

Paired and one-sample t-Tests

Description

Performs paired and one-sample t-Tests.

Usage

```
t_test_paired(data, alternative = "two.sided", ci_level = NULL, mean_null = 0)
```

Arguments

data	(list) A list whose first element is the vector of normal values from sample 1 and the second element is the vector of normal values from sample 2. Both vectors must be the same sample size and sorted by the subject/item index. If <code>length(data) == 1L</code> , the one-sample test is used. <code>NAs</code> are silently excluded. The default output from <code>sim_log_lognormal()</code> .
alternative	(string: "two.sided") The alternative hypothesis. Must be one of "two.sided", "greater", or "less". See 'Details' for additional information.
ci_level	(Scalar numeric: NULL; (0, 1)) If NULL, confidence intervals are set as NA. If in (0, 1), confidence intervals are calculated at the specified level.
mean_null	(Scalar numeric: 0; (-Inf, Inf)) The mean or mean difference assumed under the null hypothesis. See 'Details' for additional information.

Details

This function is primarily designed for speed in simulation. Missing values are silently excluded. The one-sample test is used for both the true one-sample scenario and for the paired differences from a dependent two-sample scenario. Below we use paired difference language as that is the most common case. The hypotheses for the paired t-test are

$$H_{null} : \mu_{diff} = \mu_{null}$$

$$H_{alt} : \begin{cases} \mu_{diff} \neq \mu_{null} & \text{two-sided} \\ \mu_{diff} > \mu_{null} & \text{greater than} \\ \mu_{diff} < \mu_{null} & \text{less than} \end{cases}$$

where $\mu_{diff} = AM(X_2 - X_1)$ is the arithmetic mean of the paired differences (sample 2 - sample 1) and μ_{null} is a constant for the assumed population mean difference (usually $\mu_{null} = 0$).

The test statistic is

$$T = \frac{\bar{x}_{diff} - \mu_{null}}{\sqrt{\frac{s^2}{n}}}$$

where \bar{x}_{diff} is the sample mean of the differences, μ_{null} is the population mean difference assumed under the null hypothesis, n is the sample size of the differences, and s^2 is the sample variance.

The critical value of the test statistic has degrees of freedom

$$df = n - 1$$

and the p-value is calculated as

$$p = \begin{cases} 2\min\{P(T \geq t_{n-1} | H_{null}), P(T \leq t_{n-1} | H_{null})\} & \text{two-sided} \\ P(T \geq t_{n-1} | H_{null}) & \text{greater than} \\ P(T \leq t_{n-1} | H_{null}) & \text{less than} \end{cases}$$

Let $GM(\cdot)$ be the geometric mean and $AM(\cdot)$ be the arithmetic mean. For dependent lognormal samples X_1 and X_2 it follows that $\ln X_1$ and $\ln X_2$ are dependent normally distributed variables. Setting $\mu_{diff} = AM(\ln X_2 - \ln X_1)$ we have

$$e^{\mu_{diff}} = GM\left(\frac{X_2}{X_1}\right)$$

This forms the basis for making inference about the geometric mean ratio of the original lognormal data using the mean difference of the log transformed normal data.

Value

A list with the following elements:

Slot	Subslot	Name	Description
1		t	Value of the t-statistic.
2		df	Degrees of freedom for the t-statistic.
3		p	p-value.
4		mean_diff	Estimated mean or mean of the differences (sample 2 – sample 1).
4	1	estimate	Point estimate.
4	2	lower	Confidence interval lower bound.
4	3	upper	Confidence interval upper bound.
5		n	Number of paired observations.
6		method	Method used for the results.
7		alternative	The alternative hypothesis.
8		ci_level	The confidence level.
9		mean_null	Assumed population mean of the differences under the null hypothesis.

References

Julious SA (2004). “Sample sizes for clinical trials with Normal data.” *Statistics in Medicine*, **23**(12), 1921–1986. doi:10.1002/sim.1783.

Hauschke D, Steinijs VW, Diletti E, Burke M (1992). “Sample size determination for bioequivalence assessment using a multiplicative model.” *Journal of Pharmacokinetics and Biopharmaceutics*, **20**(5), 557–561. ISSN 0090-466X, doi:10.1007/BF01061471.

Johnson NL, Kotz S, Balakrishnan N (1994). *Continuous univariate distributions*, Wiley series in probability and mathematical statistics, 2nd ed edition. Wiley, New York. ISBN 9780471584957 9780471584940.

See Also

[stats::t.test\(\)](#)

Examples

```
#-----
# t_test_paired() examples
#-----
library(depower)

# One-sample t-test
set.seed(1234)
t_test1 <- sim_log_lognormal(
  n1 = 40,
  ratio = 1.5,
  cv1 = 0.4
) |>
  t_test_paired(ci_level = 0.95)

t_test1
```



```
# Paired t-test using two dependent samples
set.seed(1234)
t_test2 <- sim_log_lognormal(
  n1 = 40,
  n2 = 40,
  ratio = 1.5,
  cv1 = 0.4,
  cv2 = 0.2,
  cor = 0.3
) |>
  t_test_paired(ci_level = 0.95)

t_test2
```

t_test_welch

Welch's t-Test

Description

Performs Welch's independent two-sample t-test.

Usage

```
t_test_welch(data, alternative = "two.sided", ci_level = NULL, mean_null = 0)
```

Arguments

data	(list) A list whose first element is the vector of normal values from group 1 and the second element is the vector of normal values from group 2. <i>NAs</i> are silently excluded. The default output from <code>sim_log_lognormal()</code> .
alternative	(string: "two.sided") The alternative hypothesis. Must be one of "two.sided", "greater", or "less". See 'Details' for additional information.
ci_level	(Scalar numeric: NULL; (0, 1)) If NULL, confidence intervals are set as NA. If in (0, 1), confidence intervals are calculated at the specified level.
mean_null	(Scalar numeric: 0; (-Inf, Inf)) The difference of means assumed under the null hypothesis. See 'Details' for additional information.

Details

This function is primarily designed for speed in simulation. Missing values are silently excluded. The hypotheses for Welch's independent two-sample t-test are

$$H_{null} : \mu_2 - \mu_1 = \mu_{null}$$

$$H_{alt} : \begin{cases} \mu_2 - \mu_1 \neq \mu_{null} & \text{two-sided} \\ \mu_2 - \mu_1 > \mu_{null} & \text{greater than} \\ \mu_2 - \mu_1 < \mu_{null} & \text{less than} \end{cases}$$

where μ_1 is the population mean of group 1, μ_2 is the population mean of group 2, and μ_{null} is a constant for the assumed difference of population means (usually $\mu_{null} = 0$).

The test statistic is

$$T = \frac{(\bar{x}_2 - \bar{x}_1) - \mu_{null}}{\sqrt{\frac{s_1^2}{n_1} + \frac{s_2^2}{n_2}}}$$

where \bar{x}_1 and \bar{x}_2 are the sample means, μ_{null} is the difference of population means assumed under the null hypothesis, n_1 and n_2 are the sample sizes, and s_1^2 and s_2^2 are the sample variances.

The critical value of the test statistic uses the Welch–Satterthwaite degrees of freedom

$$v = \frac{\left(\frac{s_1^2}{n_1} + \frac{s_2^2}{n_2}\right)^2}{(N_1 - 1)^{-1} \left(\frac{s_1^2}{n_1}\right)^2 + (N_2 - 1)^{-1} \left(\frac{s_2^2}{n_2}\right)^2}$$

and the p-value is calculated as

$$p = \begin{cases} 2\min\{P(T \geq t_v | H_{null}), P(T \leq t_v | H_{null})\} & \text{two-sided} \\ P(T \geq t_v | H_{null}) & \text{greater than} \\ P(T \leq t_v | H_{null}) & \text{less than} \end{cases}$$

Let $GM(\cdot)$ be the geometric mean and $AM(\cdot)$ be the arithmetic mean. For independent lognormal variables X_1 and X_2 it follows that $\ln X_1$ and $\ln X_2$ are independent normally distributed variables. Defining $\mu_{X_2} - \mu_{X_1} = AM(\ln X_2) - AM(\ln X_1)$ we have

$$e^{\mu_{X_2} - \mu_{X_1}} = \frac{GM(X_2)}{GM(X_1)}$$

This forms the basis for making inference about the ratio of geometric means of the original log-normal data using the difference of means of the log transformed normal data.

Value

A list with the following elements:

Slot	Subslot	Name	Description
1		t	Value of the t-statistic.
2		df	Degrees of freedom for the t-statistic.
3		p	p-value.
4		diff_mean	Estimated difference of means (group 2 – group 1).
4	1	estimate	Point estimate.
4	2	lower	Confidence interval lower bound.
4	3	upper	Confidence interval upper bound.
5		mean_1	Estimated mean of group 1.
6		mean_2	Estimated mean of group 2.
7		n1	Sample size of group 1.
8		n2	Sample size of group 2.
9		method	Method used for the results.
10		alternative	The alternative hypothesis.
11		ci_level	The confidence level.
12		mean_null	Assumed population difference of the means under the null hypothesis.

References

Julious SA (2004). “Sample sizes for clinical trials with Normal data.” *Statistics in Medicine*, **23**(12), 1921–1986. doi:10.1002/sim.1783.

Hauschke D, Steinijans VW, Diletti E, Burke M (1992). “Sample size determination for bioequivalence assessment using a multiplicative model.” *Journal of Pharmacokinetics and Biopharmaceutics*, **20**(5), 557–561. ISSN 0090-466X, doi:10.1007/BF01061471.

Johnson NL, Kotz S, Balakrishnan N (1994). *Continuous univariate distributions*, Wiley series in probability and mathematical statistics, 2nd ed edition. Wiley, New York. ISBN 9780471584957 9780471584940.

See Also

`stats::t.test()`

Examples

```
#-----
# t_test_welch() examples
#-----
library(depower)

# Welch's t-test
set.seed(1234)
sim_log_lognormal(
  n1 = 40,
  n2 = 40,
  ratio = 1.5,
  cv1 = 0.4,
```

```

cv2 = 0.4
) |>
  t_test_welch(ci_level = 0.95)

```

wald_test_bnb	<i>Wald test for BNB ratio of means</i>
---------------	---

Description

Wald test for the ratio of means from bivariate negative binomial outcomes.

Usage

```
wald_test_bnb(data, ci_level = NULL, link = "log", ratio_null = 1, ...)
```

Arguments

data	(list) A list whose first element is the vector of negative binomial values from sample 1 and the second element is the vector of negative binomial values from sample 2. Each vector must be sorted by the subject/item index and must be the same sample size. NAs are silently excluded. The default output from sim_bnb() .
ci_level	(Scalar numeric: NULL; (0, 1)) If NULL, confidence intervals are set as NA. If in (0, 1), confidence intervals are calculated at the specified level.
link	(Scalar string: "log") The one-to-one link function for transformation of the ratio in the test hypotheses. Must be one of "log" (default), "sqrt", "squared", or "identity". See 'Details' for additional information.
ratio_null	(Scalar numeric: 1; (0, Inf)) The (pre-transformation) ratio of means assumed under the null hypothesis (sample 2 / sample 1). Typically ratio_null = 1 (no difference). See 'Details' for additional information.
...	Optional arguments passed to the MLE function mle_bnb() .

Details

This function is primarily designed for speed in simulation. Missing values are silently excluded.

Suppose $X_1 | G = g \sim \text{Poisson}(\mu g)$ and $X_2 | G = g \sim \text{Poisson}(r\mu g)$ where $G \sim \text{Gamma}(\theta, \theta^{-1})$ is the random item (subject) effect. Then $X_1, X_2 \sim \text{BNB}(\mu, r, \theta)$ is the joint distribution where X_1 and X_2 are dependent (though conditionally independent), X_1 is the count outcome for sample 1 of the items (subjects), X_2 is the count outcome for sample 2 of the items (subjects), μ is the conditional mean of sample 1, r is the ratio of the conditional means of sample 2 with respect to sample 1, and θ is the gamma distribution shape parameter which controls the dispersion and the correlation between sample 1 and 2.

The hypotheses for the Wald test of r are

$$H_{null} : f(r) = f(r_{null})$$

$$H_{alt} : f(r) \neq f(r_{null})$$

where $f(\cdot)$ is a one-to-one link function with nonzero derivative, $r = \frac{\bar{X}_2}{\bar{X}_1}$ is the population ratio of arithmetic means for sample 2 with respect to sample 1, and r_{null} is a constant for the assumed null population ratio of means (typically $r_{null} = 1$).

Rettiganti and Nagaraja (2012) found that $f(r) = r^2$, $f(r) = r$, and $f(r) = r^{0.5}$ had greatest power when $r < 1$. However, when $r > 1$, $f(r) = \ln r$, the likelihood ratio test, and $f(r) = r^{0.5}$ had greatest power. $f(r) = r^2$ was biased when $r > 1$. Both $f(r) = \ln r$ and $f(r) = r^{0.5}$ produced acceptable results for any r value. These results depend on the use of asymptotic vs. exact critical values.

The Wald test statistic is

$$W(f(\hat{r})) = \left(\frac{f\left(\frac{\bar{x}_2}{\bar{x}_1}\right) - f(r_{null})}{f'(\hat{r})\hat{\sigma}_{\hat{r}}} \right)^2$$

where

$$\hat{\sigma}_{\hat{r}}^2 = \frac{\hat{r}(1 + \hat{r})(\hat{\mu} + \hat{r}\hat{\mu} + \hat{\theta})}{n \left[\hat{\mu}(1 + \hat{r})(\hat{\mu} + \hat{\theta}) - \hat{\theta}\hat{r} \right]}$$

Under H_{null} , the Wald test statistic is asymptotically distributed as χ_1^2 . The approximate level α test rejects H_{null} if $W(f(\hat{r})) \geq \chi_1^2(1 - \alpha)$. Note that the asymptotic critical value is known to underestimate the exact critical value. Hence, the nominal significance level may not be achieved for small sample sizes (possibly $n \leq 10$ or $n \leq 50$). The level of significance inflation also depends on $f(\cdot)$ and is most severe for $f(r) = r^2$, where only the exact critical value is recommended.

Value

A list with the following elements:

Slot	Subslot	Name	Description
1		chisq	Asymptotic χ^2 test statistic for the ratio of means.
2		df	Degrees of freedom.
3		p	p-value.
4		ratio	Estimated ratio of means (group 2 / group 1).
4	1	estimate	Point estimate.
4	2	lower	Confidence interval lower bound.
4	3	upper	Confidence interval upper bound.
5		mean1	Estimated mean of sample 1.
6		mean2	Estimated mean of sample 2.
7		dispersion	Estimated dispersion.
8		n1	The sample size of sample 1.
9		n2	The sample size of sample 2.

10	method	Method used for the results.
11	ci_level	The confidence level.
12	link	Link function used to transform the ratio of means in the test hypotheses.
13	ratio_null	Assumed ratio of means under the null hypothesis.
14	mle_code	Integer indicating why the optimization process terminated.
15	mle_message	Information from the optimizer.

References

Rettiganti M, Nagaraja HN (2012). “Power Analyses for Negative Binomial Models with Application to Multiple Sclerosis Clinical Trials.” *Journal of Biopharmaceutical Statistics*, **22**(2), 237–259. ISSN 1054-3406, 1520-5711, doi:10.1080/10543406.2010.528105.

Aban IB, Cutter GR, Mavinga N (2009). “Inferences and power analysis concerning two negative binomial distributions with an application to MRI lesion counts data.” *Computational Statistics & Data Analysis*, **53**(3), 820–833. ISSN 01679473, doi:10.1016/j.csda.2008.07.034.

Examples

```
#-----
# wald_test_bnb() examples
#-----
library(depower)

set.seed(1234)
sim_bnb(
  n = 40,
  mean1 = 10,
  ratio = 1.2,
  dispersion = 2
) |>
  wald_test_bnb()
```

wald_test_nb

Wald test for NB ratio of means

Description

Wald test for the ratio of means from two independent negative binomial outcomes.

Usage

```
wald_test_nb(
  data,
  equal_dispersion = FALSE,
  ci_level = NULL,
  link = "log",
  ratio_null = 1,
  ...
)
```

Arguments

data	(list) A list whose first element is the vector of negative binomial values from group 1 and the second element is the vector of negative binomial values from group 2. NAs are silently excluded. The default output from <code>sim_nb()</code> .
equal_dispersion	(Scalar logical: FALSE) If TRUE, the Wald test is calculated assuming both groups have the same population dispersion parameter. If FALSE (default), the Wald test is calculated assuming different dispersions.
ci_level	(Scalar numeric: NULL; (0, 1)) If NULL, confidence intervals are set as NA. If in (0, 1), confidence intervals are calculated at the specified level.
link	(Scalar string: "log") The one-to-one link function for transformation of the ratio in the test hypotheses. Must be one of "log" (default), "sqrt", "squared", or "identity".
ratio_null	(Scalar numeric: 1; (0, Inf)) The (pre-transformation) ratio of means assumed under the null hypothesis (group 2 / group 1). Typically <code>ratio_null = 1</code> (no difference). See 'Details' for additional information.
...	Optional arguments passed to the MLE function <code>mle_nb()</code> .

Details

This function is primarily designed for speed in simulation. Missing values are silently excluded.

Suppose $X_1 \sim NB(\mu, \theta_1)$ and $X_2 \sim NB(r\mu, \theta_2)$ where X_1 and X_2 are independent, X_1 is the count outcome for items in group 1, X_2 is the count outcome for items in group 2, μ is the arithmetic mean count in group 1, r is the ratio of arithmetic means for group 2 with respect to group 1, θ_1 is the dispersion parameter of group 1, and θ_2 is the dispersion parameter of group 2.

The hypotheses for the Wald test of r are

$$H_{null} : f(r) = f(r_{null})$$

$$H_{alt} : f(r) \neq f(r_{null})$$

where $f(\cdot)$ is a one-to-one link function with nonzero derivative, $r = \frac{\bar{X}_2}{\bar{X}_1}$ is the population ratio of arithmetic means for group 2 with respect to group 1, and r_{null} is a constant for the assumed null population ratio of means (typically $r_{null} = 1$).

Rettiganti and Nagaraja (2012) found that $f(r) = r^2$ and $f(r) = r$ had greatest power when $r < 1$. However, when $r > 1$, $f(r) = \ln r$, the likelihood ratio test, and the Rao score test have greatest power. Note that $f(r) = \ln r$, LRT, and RST were unbiased tests while the $f(r) = r$ and $f(r) = r^2$ tests were biased when $r > 1$. The $f(r) = \ln r$, LRT, and RST produced acceptable results for any r value. These results depend on the use of asymptotic vs. exact critical values.

The Wald test statistic is

$$W(f(\hat{r})) = \left(\frac{f\left(\frac{\hat{x}_2}{\hat{x}_1}\right) - f(r_{null})}{f'(\hat{r})\hat{\sigma}_{\hat{r}}} \right)^2$$

where

$$\hat{\sigma}_{\hat{r}}^2 = \frac{\hat{r} \left[n_1 \hat{\theta}_1 (\hat{r} \hat{\mu} + \hat{\theta}_2) + n_2 \hat{\theta}_2 \hat{r} (\hat{\mu} + \hat{\theta}_1) \right]}{n_1 n_2 \hat{\theta}_1 \hat{\theta}_2 \hat{\mu}}$$

Under H_{null} , the Wald test statistic is asymptotically distributed as χ_1^2 . The approximate level α test rejects H_{null} if $W(f(\hat{r})) \geq \chi_1^2(1 - \alpha)$. Note that the asymptotic critical value is known to underestimate the exact critical value. Hence, the nominal significance level may not be achieved for small sample sizes (possibly $n \leq 10$ or $n \leq 50$). The level of significance inflation also depends on $f(\cdot)$ and is most severe for $f(r) = r^2$, where only the exact critical value is recommended.

Value

A list with the following elements:

Slot	Subslot	Name	Description
1		chisq	Asymptotic χ^2 test statistic for the ratio of means.
2		df	Degrees of freedom.
3		p	p-value.
4		ratio	Estimated ratio of means (group 2 / group 1).
4	1	estimate	Point estimate.
4	2	lower	Confidence interval lower bound.
4	3	upper	Confidence interval upper bound.
5		mean1	Estimated mean of group 1.
6		mean2	Estimated mean of group 2.
7		dispersion1	Estimated dispersion of group 1.
8		dispersion2	Estimated dispersion of group 2.
9		n1	Sample size of group 1.
10		n2	Sample size of group 2.
11		method	Method used for the results.
12		ci_level	The confidence level.
13		equal_dispersion	Whether or not equal dispersions were assumed.
14		link	Link function used to transform the ratio of means in the test hypotheses.
15		ratio_null	Assumed ratio of means under the null hypothesis.
16		mle_code	Integer indicating why the optimization process terminated.
17		mle_message	Information from the optimizer.

References

Rettiganti M, Nagaraja HN (2012). "Power Analyses for Negative Binomial Models with Application to Multiple Sclerosis Clinical Trials." *Journal of Biopharmaceutical Statistics*, **22**(2), 237–259. ISSN 1054-3406, 1520-5711, doi:10.1080/10543406.2010.528105.

Aban IB, Cutter GR, Mavinga N (2009). “Inferences and power analysis concerning two negative binomial distributions with an application to MRI lesion counts data.” *Computational Statistics & Data Analysis*, **53**(3), 820–833. ISSN 01679473, doi:10.1016/j.csda.2008.07.034.

Examples

```
#-----  
# wald_test_nb() examples  
#-----  
library(depower)  
  
set.seed(1234)  
sim_nb(  
  n1 = 60,  
  n2 = 40,  
  mean1 = 10,  
  ratio = 1.5,  
  dispersion1 = 2,  
  dispersion2 = 8  
) |>  
wald_test_nb()
```

Index

`base::call()`, 32

`ggplot2::aes()`, 28
`ggplot2::facet_grid()`, 28
`ggplot2::ggplot()`, 29
`glm_nb`, 9
`glmm_bnb`, 2
`glmm_poisson`, 6
`glmmTMB::glmmTMB()`, 3, 4, 6, 8–11

`lrt_bnb`, 12
`lrt_nb`, 14

`mle_bnb`, 17
`mle_bnb()`, 13, 60
`mle_bnb_alt` (`mle_bnb`), 17
`mle_bnb_null` (`mle_bnb`), 17
`mle_nb`, 19
`mle_nb()`, 15, 63
`mle_nb_alt` (`mle_nb`), 19
`mle_nb_null` (`mle_nb`), 19
`mvnfast::rmvn()`, 47

NA, 3, 6, 9, 12, 15, 17, 19, 22, 25, 54, 57, 60, 63
`nll_bnb`, 18, 22
`nll_bnb_alt` (`nll_bnb`), 22
`nll_bnb_null` (`nll_bnb`), 22
`nll_nb`, 21, 24
`nll_nb_alt` (`nll_nb`), 24
`nll_nb_null` (`nll_nb`), 24

`parallel::detectCores()`, 31, 37, 44, 50
`plot.depower`, 27
`plot.depower()`, 34
`power`, 31
`power()`, 27–29

`sim_bnb`, 36
`sim_bnb()`, 3, 6, 7, 12, 17, 18, 31, 49, 51, 52, 60
`sim_log_lognormal`, 42
`sim_log_lognormal()`, 31, 54, 57
`sim_nb`, 49
`sim_nb()`, 9, 15, 19, 21, 23, 26, 31, 36, 39, 40, 63

`stats::nlm()`, 17, 20, 23, 26
`stats::nlminb()`, 17, 20, 23, 26
`stats::optim()`, 17, 20, 23, 26
`stats::rgamma()`, 40
`stats::rbinom()`, 40, 52
`stats::rnorm()`, 47
`stats::rpois()`, 40
`stats::t.test()`, 56, 59

`t_test_paired`, 54
`t_test_paired()`, 33
`t_test_welch`, 57
`t_test_welch()`, 33

`wald_test_bnb`, 60
`wald_test_nb`, 62