Package: metabodecon (via r-universe)

November 8, 2026

Title Deconvolution and Alignment of 1d NMR Spectra

Version 1.6.2

Description A framework for deconvolution, alignment and postprocessing of 1-dimensional (1d) nuclear magnetic resonance (NMR) spectra, resulting in a data matrix of aligned signal integrals. The deconvolution part uses the algorithm described in Koh et al. (2009) <doi:10.1016/j.jmr.2009.09.003>. The alignment part is based on functions from the 'speaq' package, described in Beirnaert et al. (2018) <doi:10.1371/journal.pcbi.1006018> and Vu et al. (2011) <doi:10.1186/1471-2105-12-405>. A detailed description and evaluation of an early version of the package, 'MetaboDecon1D v0.2.2', can be found in Haeckl et al. (2021) <doi:10.3390/metabo11070452>.

License GPL (>= 3)

URL https://github.com/spang-lab/metabodecon/, https://spang-lab.github.io/metabodecon/

BugReports https://github.com/spang-lab/metabodecon/issues

biocViews NMR, Deconvolution

Encoding UTF-8

RoxygenNote 7.3.2

Depends R (>= 3.5.0)

Imports data.table, mathjaxr, readJDX, speaq, toscutil (>= 2.8.0), withr

Suggests covr, devtools, diffobj, digest, glue, impute, knitr, lifecycle, MassSpecWavelet, mdrb, microbenchmark, pkgbuild, pkgload, R.devices, rcmdcheck, remotes, rmarkdown, testthat (>= 3.0.0), usethis, V8, vdiffr, waldo

LazyData true

Config/testthat/edition 3

Config/testthat/parallel true

Config/testthat/start-first install_mdrb, read_spectrum, download_example_datasets, cache_example_datasets, align, mcmapply, datadir, get_decon_params, generate_lorentz_curves, smooth_signals, speaq_align

RdMacros mathjaxr

BuildManual TRUE

Language en-US

Additional_repositories https://spang-lab.r-universe.dev

VignetteBuilder knitr

NeedsCompilation no

Author Tobias Schmidt [aut, cre, cph], Martina Haeckl [aut, cph], Yanren Linda Hu [ctb], Wolfram Gronwald [aut, cph]

Maintainer Tobias Schmidt <tobias.schmidt331@gmail.com>

Config/pak/sysreqs cmake libicu-dev libxml2-dev libssl-dev

Repository https://cranhaven.r-universe.dev

Date/Publication 2026-11-07 18:02:00 UTC

RemoteUrl https://github.com/cranhaven/cranhaven.r-universe.dev

RemoteRef package/metabodecon

RemoteSha 4f982c913406f67505fc19966b423f1fff3e0d28

RemoteSubdir metabodecon

Contents

aaa_Get_Started . . . 3
align . . . 4
as_metabodecon_class . . . 5
calculate_lorentz_curves . . . 8
check_mdrb . . . 9
combine_peaks . . . 10
convert_pos . . . 12
datadir . . . 13
datadir_persistent . . . 14
datadir_temp . . . 15
deconvolute . . . 15
dohCluster . . . 17
download_example_datasets . . . 18
draw_spectrum . . . 20
evalwith . . . 23
gen_feat_mat . . . 25
generate_lorentz_curves . . . 27
get_data_dir . . . 30
get_ppm_range . . . 31
get_si_mat . . . 32

install_mdrb . . . 33
is_metabodecon_class . . . 34
make_spectrum . . . 35
metabodecon_file . . . 37
MetaboDecon1D . . . 37
plot_lorentz_curves_save_as_png . . . 40
plot_spectra . . . 41
plot_spectrum . . . 42
plot_spectrum_superposition_save_as_png . . . 45
plot_triplets . . . 46
print_methods . . . 48
read_spectra . . . 49
read_spectrum . . . 50
sap . . . 51
sim . . . 52
simulate_spectrum . . . 52
speaq_align . . . 54
tmpdir . . . 55
transp . . . 56
tree . . . 57
width . . . 58

Index **59**

`aaa_Get_Started` *Get URL of Metabodecon "Get Started" Page*

Description

`get_started` and `aaa_Get_Started` both return (and optionally open) the URL of the "Get Started" page of the metabodecon documentation. The `aaa_Get_Started` version exists, because functions are listed alphabetically in the reference manual and we want `get_started` to be shown at the top of the list (i.e., it needs to start with an 'a').

Usage

```
aaa_Get_Started(open_browser = interactive())

get_started(open_browser = interactive())
```

Arguments

`open_browser`	If TRUE, the "Get Stated" page is opened in the default browser.

Value

A character string containing the URL of the "Get Started" page.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
get_started(open_browser = FALSE)
get_started()
```

`align` *Align Spectra*

Description

Align signals across a list of deconvoluted spectra using the 'CluPA' algorithm from the 'speaq' package, described in Beirnaert et al. (2018) doi:10.1371/journal.pcbi.1006018 and Vu et al. (2011) doi:10.1186/1471-2105-12-405 plus the additional peak combination described in `combine_peaks()`.

Usage

```
align(x, maxShift = 50, maxCombine = 5, verbose = TRUE, install_deps = NULL)
```

Arguments

`x`	An object of type `decons1` or `decons2` as described in Metabodecon Classes. To align `decons0` objects (as returned by the now deprecated MetaboDecon1D), you can use `as_decons2()` to convert it to a `decons2` object first.
`maxShift`	Maximum number of points along the "ppm-axis" a value can be moved by the 'speaq' package. 50 is a suitable starting value for plasma spectra with a digital resolution of 128K. Note that this parameter has to be individually optimized depending on the type of analyzed spectra and the digital resolution. For urine which is more prone to chemical shift variations this value most probably has to be increased. Passed as argument `maxShift` to `speaq_align()`.
`maxCombine`	Amount of adjacent columns which may be combined for improving the alignment. Passed as argument `range` to `combine_peaks()`.
`verbose`	Whether to print additional information during the alignment process.
`install_deps`	Alignment relies on the 'speaq' package, which itself relies on the 'MassSpecWavelet' and 'impute' packages. Both, 'MassSpecWavelet' and 'impute' are not available on CRAN, but can be installed from Bioconductor or R-Universe. If `install_deps=TRUE`, these packages will be automatically installed from R-Universe without asking for confirmation. If `install_deps=NULL` (default), the user will be asked for confirmation before installing missing dependencies. If asking for confirmation is not possible or `install_deps=FALSE`, the function will raise an error if the packages are not installed.

Value

An object of type `align` as described in Metabodecon Classes.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
if (interactive()) {
    # Example requires an interactive R session, because in case of missing
    # dependencies the user will be asked for confirmation to install them.
    decons <- deconvolute(sim[1:2], sfr = c(3.55, 3.35))
    aligned <- align(decons)
}
```

---

as_metabodecon_class *Convert to a Metabodecon Object*

Description

Convert a object to a Metabodecon object.

Usage

```
as_spectrum(x, sf = c(1000, 1e+06))

as_decon0(x, sf = NULL, spectrum = NULL, optional = TRUE)

as_decon1(
  x,
  sf = c(1000, 1e+06),
  spectrum = NULL,
  sfr = NULL,
  wshw = NULL,
  bwc = 2
)

as_decon2(
  x,
  sf = c(1000, 1e+06),
  spectrum = NULL,
  sfr = NULL,
  wshw = NULL,
  bwc = 2
)
```

```
as_spectra(
  x,
  file_format = "bruker",
  expno = 10,
  procno = 10,
  raw = FALSE,
  silent = TRUE,
  force = FALSE
)

as_decons0(x, sfs = list(c(1000, 1e+06)), spectra = list(NULL), nworkers = 1)

as_decons1(
  x,
  sfs = list(c(1000, 1e+06)),
  spectra = list(NULL),
  sfrs = list(NULL),
  wshws = list(NULL),
  bwc = 2,
  nworkers = 1
)

as_decons2(
  x,
  sfs = list(c(1000, 1e+06)),
  spectra = list(NULL),
  sfrs = list(NULL),
  wshws = list(NULL),
  bwc = 2,
  nworkers = 1
)
```

Arguments

x	The object to convert.
sf	Scale factor used during Only required if x is a decon0 object.
spectrum, spectra	The spectrum/spectra object corresponding to x as returned by read_spectrum() / read_spectra. Only required if x is a decon0 object.
optional	Logical. If TRUE, the two optional elements signal_free_region and range_water_signal_ppm are included in the returned decon0 object.
sfr, sfrs	sfr should be a vector specifying the borders of the signal free region. sfrs should be a list of such vectors. Only required if x is a decon0 object where element signal_free_region is missing (or a decons0 objected containing such decon0 objects).
wshw, wshws	wshw should specify the half width of the water signal region. wshws should be a list of such values. Only required if x is a decon0 object where element

	range_water_signal_ppm is missing (or a decons0 objected containing such decon0 objects).
bwc	Level of backwards compatibility. If bwc == 0, bug fixes introduced after version 0.2.2 of Metabodecon are not used. If bwc == 1, new features introduced after version 0.2.2 of Metabodecon (e.g. faster algorithms) are not used. If bwc == 2, all bug fixes and features introduced after version 0.2.2 are used. Support for bwc == 0 will be removed in 'metabodecon v2.0'.
file_format	The file_format of the spectrum file. E.g. "bruker" or "jcampdx".
expno, procno	The experiment/processing number for the file. E.g. "10". Only relevant if file_format equals "bruker". For details see section File Structure in the metabodecon FAQ.
raw	If FALSE, scales the returned signal intensities based on information available in the spectrum metadata, in particular NC_proc. For details see processing-reference.pdf, available at https://www.bruker.com/en.html at section 'Services & Support > Documentation & Manuals > Magnetic Resonance > Acquisition & Processing > TopSpin Processing Commands and Parameters' (requires login).
silent	If TRUE, no output will be printed to the console.
force	If TRUE, try to continue when encountering errors and print info messages instead. To hide these messages as well, set silent = TRUE.
sfs	List of scale factors. Only required if x is a list of decon0 objects.
nworkers	Number of workers for parallel processing.

Value

An object of the specified class.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
dirpath <- metabodecon_file("sim_subset")
spectra <- read_spectra(dirpath)
spectrum <- spectra[[1]]
decons1 <- generate_lorentz_curves_sim(spectra)
decon1 <- generate_lorentz_curves_sim(spectrum)
decon2 <- as_decon2(decon1)
```

`calculate_lorentz_curves` *Calculate lorentz curves for each analyzed spectrum*

Description

Helper function of `plot_lorentz_curves_save_as_png()`. Should not be called directly by the user.

Calculates the lorentz curves of each investigated spectrum.

This function has been deprecated with metabodecon version v1.4.3 and will be removed with version 2.0.0.

[Deprecated]

Usage

```
calculate_lorentz_curves(deconv_result, number_of_files = NA)
```

Arguments

`deconv_result`	A list as returned by `generate_lorentz_curves()` or MetaboDecon1D.
`number_of_files`	Number of spectra to analyze

Value

If `deconv_result` holds the result of a single deconvolution, a matrix containing the generated Lorentz curves is returned, where each row depicts one Lorentz curve. If `deconv_result` is a list of deconvoluted spectra, a list of such matrices is returned.

Author(s)

2020-2021 Martina Haeckl: initial version.
2024-2025 Tobias Schmidt: Minor updates to pass CRAN checks

See Also

`MetaboDecon1D()`, `plot_triplets()`, `plot_lorentz_curves_save_as_png()`, `plot_spectrum_superposition_save_a`

Examples

```
## ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
## Deconvolute the spectra in folder "bruker/sim_subset" into a list of
## Lorentz Curves (specified via the parameters A, lambda and x_0).
## ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
decons <- generate_lorentz_curves_sim(sim[1:2])
decon0 <- decons[[1]]
```

```
## ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
## Calculate the corresponding y values at each ppm value for each Lorentz
## Curve. I.e. you get a matrix of dimension n x m for each deconvolution,
## where n is the number of Lorentz Curves and m is the number of ppm values.
## ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
yy <- calculate_lorentz_curves(decons)
y1 <- yy[[1]]
dim(y1)

## ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
## Visualize the 5th, 9th and 11th Lorentz curve.
## ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
nrs <- c(5, 9, 11)
col <- c("red", "blue", "orange")
desc <- paste("Lorentz curve", nrs)
plot(decon0$x_values_ppm, decon0$y_values, type = "l", lty = 2)
for (i in 1:3) lines(decon0$x_values_ppm, y1[nrs[i], ], col = col[i])
legend("topright", legend = desc, col = col, lty = 1)
```

`check_mdrb` *Check Rust Backend Requirements*

Description

`check_mdrb()` returns a boolean indicating whether a suitable version of the metabodecon Rust backend mdrb is currently installed.

`check_mdrb_deps()` returns a list with information about the installation status of mdrb system dependencies.

Usage

```
check_mdrb(stop_on_fail = FALSE)

check_mdrb_deps(verbose = FALSE)
```

Arguments

`stop_on_fail`	If TRUE, an error is thrown if the check fails, providing instructions on how to install or upgrade mdrb.
`verbose`	If TRUE, additional information is printed during the check process.

Value

`check_mdrb()` returns TRUE if a suitable version of mdrb is installed, else FALSE.

`check_mdrb_deps()` returns a data.frame as follows:

```
        check           passed  comment
r       R >= 4.2        TRUE    Current: R 4.4.2
rtools  Rtools exist    TRUE    Tested with: pkgbuild::has_build_tools()
cargo   cargo >= 1.80   TRUE    Current: cargo 1.84.1 (66221abde 2024-11-19)
rustc   rustc >= 1.80   TRUE    Current: rustc 1.84.1 (e71f9a9a9 2025-01-27)
```

Column check is a string describing the performed check.
Column passed is a boolean indicating whether the check passed.
Column comment is a string string describing the check result.

The rownames of the dataframe one-word descriptions of the performed checks.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
check_mdrb()


# Checking dependencies might take more than 5 seconds, as it
# requires the compilation of a small test program as well as
# running `cargo --version` and `rustc --version`, which,
# depending on your system, might involve updating or installing
# Rust toolchain components.
check_mdrb_deps(verbose = TRUE)
```

---

combine_peaks *Combine Peaks*

Description

Helper function of `align()`. Should not be called directly by the user.

Even after calling `speaq_align()`, the alignment of individual signals is not always perfect, as 'speaq' performs a segment-wise alignment i.e. groups of signals are aligned. For further improvements, partly filled neighboring columns are merged. See 'Details' for an illustrative example.

Direct usage of this function has been deprecated with metabodecon version 1.4.3 and will be removed with metabodecon version 2.0.0.

[Deprecated]

Usage

```
combine_peaks(
  shifted_mat,
  range = 5,
  lower_bound = 1,
```

```
  spectrum_data = NULL,
  data_path = NULL
)
```

Arguments

shifted_mat	The matrix returned by speaq_align().
range	Amount of adjacent columns which are permitted to be used for improving the alignment.
lower_bound	Minimum amount of non-zero elements per column to trigger the alignment improvement.
spectrum_data	The list of deconvoluted spectra as returned by generate_lorentz_curves() that was used to generate shifted_mat. No longer required since version 1.2 of Metabodecon.
data_path	If not NULL, the returned dataframes long and short are written to data_path as "aligned_res_long.csv" and "aligned_res_short.csv".

Details

Example of what the function does:

	1	2	3	4	5
Spectrum 1	0.13	0	0	0.11	0
Spectrum 2	0	0.88	0	0.12	0
Spectrum 3	0.07	0.56	0.30	0	0
Spectrum 4	0.08	0	0.07	0	0.07
Spectrum 5	0.04	0	0	0.04	0

becomes

	1	2	3	4	5
Spectrum 1	0.13	0	0	0.11	0
Spectrum 2	0	0.88	0	0.12	0
Spectrum 3	0.07	0.56	0	0.30	0
Spectrum 4	0.08	0	0	0.07	0.07
Spectrum 5	0.04	0	0	0.04	0

I.e.

1. Column 1 and 2 get NOT merged, because they have a common non-zero entry.
2. Column 3 and 4 get merged, because they are in range of each other and have no common non-zero entries.
3. Column 4 and 5 get NOT merged, because it is more beneficial to merge column 3 and 4, as they have more mergeable entries and after merging column 3 and 4, column 4 and 5 have a common non-zero entry.

Value

A list containing two data frames `long` and `short`. The first data frame contains one column for each data point in the original spectrum. The second data frame contains only columns where at least one entry is non-zero.

Author(s)

2021-2024 Wolfram Gronwald: initial version.
2024-2025 Tobias Schmidt: refactored initial version.

Examples

```
deps <- c("MassSpecWavelet", "impute")
deps_installed <- sapply(deps, requireNamespace, quietly = TRUE)
if (all(deps_installed)) {
    # 'speaq' requires 'MassSpecWavelet' and 'impute' to be installed
    sim_subset <- metabodecon_file("bruker/sim_subset")
    spectrum_data <- generate_lorentz_curves_sim(sim_subset)
    shifted_mat <- speaq_align(spectrum_data = spectrum_data, verbose = FALSE)
    range <- 5
    lower_bound <- 1
    obj <- combine_peaks(shifted_mat, range, lower_bound)
    str(obj)
}
```

---

convert_pos *Convert from unit A to unit B*

Description

Converts positions/widths from unit A to unit B. If the direction of units A and B is reversed, the width's sign will be reversed as well. To keep widths strictly positive, wrap the result with `abs()`.

Usage

```
convert_pos(xa, ya, yb)

convert_width(xa, ya, yb)
```

Arguments

`xa`	A numeric vector specifying widths/positions in unit A.
`ya, yb`	A numeric vector specifying the positions of at least two points in unit A / unit B.

Value

A numeric vector of values converted from unit A to unit B.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
ya <- c(244, 246, 248, 250, 252)
yb <- c(15, 10, 5, 0, -5)
convert_width(c(2, 4, 8), ya, yb)
convert_pos(c(247, 249), ya, yb)
```

`datadir` *Return path to metabodecon's data directory*

Description

Returns the path to the directory where `download_example_datasets()` stores metabodecon's example data sets or any file within that directory. By default this directory is a subdirectory of R's temporary session directory. If `persistent` is set to `TRUE`, the directory equals the data directory returned by `tools::R_user_dir()` instead.

Usage

```
datadir(file = NULL, warn = TRUE, persistent = NULL)
```

Arguments

`file`	Relative path to a file within the data directory.
`warn`	Print a warning message when the requested path does not yet exist?
`persistent`	Return the path to the persistent data directory instead of the temporary one?

Details

The decision to use a temporary data dir as default and a persistent one only optionally was made to conform to CRAN package policies, which state that:

Packages should not write in the user's home filespace (including clipboards), nor anywhere else on the file system apart from the R session's temporary directory [...] Limited exceptions may be allowed in interactive sessions if the package obtains confirmation from the user. For R version 4.0 or later [...] packages may store user-specific data, configuration and cache files in their respective user directories obtained from `tools::R_user_dir()` *[...].*

Source: cran.r-project.org/web/packages/policies.

Value

Path to the data directory or a file within it.

Author(s)

2024-2025 Tobias Schmidt: initial version.

See Also

download_example_datasets(), datadir_persistent(), datadir_temp()

Examples

```
# Get temporary datadir and persistent datadir
datadir(persistent = FALSE, warn = FALSE)
datadir(persistent = TRUE,  warn = FALSE)

# Get persistent datadir if existing else temp datadir. Set `warn = TRUE`
# to raise a warning if none of the directories exist yet.
datadir(warn = FALSE)
if (interactive()) datadir()

# Get PERSISTENT_DATADIR/bruker if existing else TEMP_DATADIR/bruker
datadir(file = "bruker/urine", warn = FALSE)
```

---

datadir_persistent *Persistent Data Directory*

Description

Returns the path to the persistent data directory where metabodecon's data sets are stored. This directory equals the data directory returned by tools::R_user_dir() plus additional path normalization.

Usage

```
datadir_persistent()
```

Value

Path to the persistent data directory.

Author(s)

2024-2025 Tobias Schmidt: initial version.

See Also

datadir(), datadir_temp()

Examples

```
datadir_persistent()
```

datadir_temp *Temporary Data Directory*

Description

Returns the path to the temporary data directory where metabodecon's data sets are stored. This directory equals subdirectory 'data' of metabodecons temporary session directory `tmpdir()` plus additional path normalization.

Usage

```
datadir_temp()
```

Value

Returns the path to the temporary data directory.

Author(s)

2024-2025 Tobias Schmidt: initial version.

See Also

`tmpdir()`, `datadir()`, `datadir_persistent()`

Examples

```
datadir_temp()
```

deconvolute *Deconvolute one or more NMR spectra*

Description

Deconvolutes NMR spectra by modeling each detected signal within a spectrum as Lorentz Curve.

Usage

```
deconvolute(
  x,
  nfit = 3,
  smopts = c(2, 5),
  delta = 6.4,
  sfr = NULL,
  wshw = 0,
  ask = FALSE,
```

```
  force = FALSE,
  verbose = TRUE,
  nworkers = 1,
  use_rust = FALSE
)
```

Arguments

x	A spectrum or spectra object as described in Metabodecon Classes.
nfit	Integer. Number of iterations for approximating the parameters for the Lorentz curves. See 'Details'.
smopts	Numeric vector with two entries: the number of smoothing iterations and the number of data points to use for smoothing (must be odd). See 'Details'.
delta	Threshold for peak filtering. Higher values result in more peaks being filtered out. A peak is filtered if its score is below $\mu + \sigma \cdot \delta$, where μ is the average peak score in the signal-free region (SFR), and σ is the standard deviation of peak scores in the SFR. See 'Details'.
sfr	Numeric vector with two entries: the ppm positions for the left and right border of the signal-free region of the spectrum. See 'Details'.
wshw	Half-width of the water artifact in ppm. See 'Details'.
ask	Logical. Whether to ask for user input during the deconvolution process. If FALSE, the provided default values will be used.
force	If FALSE, the function stops with an error message if no peaks are found in the signal free region (SFR), as these peaks are required as a reference for peak filtering. If TRUE, the function instead proceeds without peak filtering, potentially increasing runtime and memory usage significantly.
verbose	Logical. Whether to print log messages during the deconvolution process.
nworkers	Number of workers to use for parallel processing. If "auto", the number of workers will be determined automatically. If a number greater than 1, it will be limited to the number of spectra.
use_rust	Logical. Whether to use the Rust backend for deconvolution. Requires the mdrb package. If TRUE and mdrb is missing, an error is thrown. If FALSE, the R implementation is used. If NULL, the Rust backend is used if available, otherwise the R implementation is used.

Details

First, an automated curvature based signal selection is performed. Each signal is represented by 3 data points to allow the determination of initial Lorentz curves. These Lorentz curves are then iteratively adjusted to optimally approximate the measured spectrum.

Value

A 'decon2' object as described in Metabodecon Classes.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
## Deconvolute a single spectrum
spectrum <- sim[1]
decon <- deconvolute(spectrum)

## Read multiple spectra from disk and deconvolute at once
spectra_dir <- metabodecon_file("sim_subset")
spectra <- read_spectra(spectra_dir)
decons <- deconvolute(spectra, sfr = c(3.55, 3.35))
```

`dohCluster` *Cluster Based Peak Alignment*

Description

Helper function of `align()`. Should not be called directly by the user.

Rewrite of `speaq::dohCluster()`, compatible with the data format returned by 'generate_lorentz_curves()' and 'gen_feat_mat()'. The function name "dohCluster" comes from "Do Hierarchical Clustering" which is part of the Alignment algorithm proposed by Vu et al. (2011) in doi:10.1186/1471-2105-12-405.

Direct usage of this function has been deprecated with metabodecon version 1.4.3 and will be removed with metabodecon version 2.0.0.

[Deprecated]

Usage

```
dohCluster(
  X,
  peakList,
  refInd = 0,
  maxShift = 100,
  acceptLostPeak = TRUE,
  verbose = TRUE
)
```

Arguments

`X`	Dataframe of signal intensities from all spectra as returned by `gen_feat_mat()`.
`peakList`	List of peak indices as returned `gen_feat_mat()`.
`refInd`	Number of the reference spectrum i.e. the spectrum to which all signals will be aligned to.
`maxShift`	Maximum number of points a value can be moved.

acceptLostPeak	Whether to allow the the alignment algorithm to ignore peaks that cannot easily be aligned with the reference spectrum.
verbose	Whether to print additional information during the alignment process.

Value

A list containing two data frames Y and new_peakList. The first one contains the aligned spectra, the second one contains the aligned signals of each spectrum.

Author(s)

2021-2024 Wolfram Gronwald: initial version.
2024-2025 Tobias Schmidt: refactored initial version.

Examples

```
deps <- c("MassSpecWavelet", "impute")
deps_installed <- sapply(deps, requireNamespace, quietly = TRUE)
if (all(deps_installed)) {
    # 'speaq' requires 'MassSpecWavelet' and 'impute' to be installed
    sim_subset <- metabodecon_file("bruker/sim_subset")
    decons <- generate_lorentz_curves_sim(sim_subset)
    feat <- gen_feat_mat(decons)
    refObj <- speaq::findRef(feat$peakList)
    hclObj <- dohCluster(
        X = feat$data_matrix,
        peakList = feat$peakList,
        refInd = refObj$refInd,
        maxShift = 100,
        acceptLostPeak = TRUE,
        verbose = TRUE
    )
    str(hclObj, 1)
}
```

---

download_example_datasets

Download metabodecon Example Datasets

Description

Downloads example datasets that can be used to test the functionality of the metabodecon package. These datasets are not included in the package by default due to size constraints. The datasets are downloaded as zip file and extracted automatically, unless extraction is disabled by the user.

Usage

```
download_example_datasets(
  dst_dir = NULL,
  extract = TRUE,
  persistent = NULL,
  overwrite = FALSE,
  silent = FALSE
)
```

Arguments

dst_dir	The destination directory where the downloaded datasets will be stored. If NULL, the function will return the path to the cached zip file.
extract	Logical. If TRUE, the downloaded zip file will be extracted.
persistent	Logical. If TRUE, the downloaded datasets will be cached at datadir_persistent() to speed up future calls to download_example_datasets(). If FALSE, the datasets will be cached at datadir_temp(). If NULL, the function will check both paths for the cached datasets but will return datadir_temp() if the cached file does not yet exist.
overwrite	Logical. If TRUE, existing files with the same name in the destination directory will be overwritten.
silent	Logical. If TRUE, no output will be printed to the console.

Value

The path to the downloaded (and possibly extracted) datasets.

Author(s)

2024-2025 Tobias Schmidt: initial version.

See Also

datadir()

Examples

```
if (interactive()) {
     zip <- download_example_datasets(extract = FALSE, persistent = FALSE)
     dir <- download_example_datasets(extract = TRUE)
}
```

draw_spectrum *Draw Spectrum*

Description

Draws a single spectrum. Internally used by `plot_spectrum()`, which is usually the recommended way to plot spectra. For usage examples see test/testthat/test-draw_spectrum.R.

[Experimental]

Usage

```
draw_spectrum(
  obj,
  foc_rgn = NULL,
  foc_frac = NULL,
  foc_only = TRUE,
  add = FALSE,
  fig_rgn = NULL,
  main = NULL,
  show = TRUE,
  show_d2 = FALSE,
  truepar = NULL,
  mar = c(4.1, 5.1, 1.1, 1.1),
  sf_vert = "auto",
  si_line = list(),
  sm_line = list(),
  sp_line = list(),
  d2_line = list(),
  al_line = list(),
  lc_lines = list(),
  tp_lines = list(),
  al_lines = list(),
  cent_pts = list(),
  bord_pts = list(),
  norm_pts = list(),
  bg_rect = list(),
  foc_rect = list(),
  lc_rects = list(),
  tp_rects = list(),
  bt_axis = list(),
  lt_axis = list(),
  tp_axis = list(),
  rt_axis = list(),
  bt_text = list(),
  lt_text = list(),
  tp_text = list(),
```

```
  rt_text = list(),
  tp_verts = list(),
  lc_verts = list(),
  al_verts = list(),
  ze_hline = list(),
  al_arrows = list(),
  lgd = list()
)
```

Arguments

obj	An object of type spectrum or decon2. For details see Metabodecon Classes.
foc_rgn	Numeric vector specifying the start and end of focus region in ppm.
foc_frac	Numeric vector specifying the start and end of focus region as fraction of the full spectrum width.
foc_only	Logical. If TRUE, only the focused region is drawn. If FALSE, the full spectrum is drawn.
add	If TRUE, draw into the currently open figure. If FALSE, start a new figure.
fig_rgn	Drawing region in normalized device coordinates as vector of the form c(x1, x2, y1, y2).
main	Main title of the plot. Drawn via title().
show	Logical. If FALSE, the function returns without doing anything.
show_d2	Logical. If TRUE, the second derivative of the spectrum is drawn. Setting this to TRUE changes most of the defaults for the drawing, e.g. by disabling the drawing of anything related to signal intensities and by changing the y-axis label to "Second Derivative".
truepar	Data frame with columns x0, A and lambda containing the true lorentzian that were used to simulate the spectrum. Required if any tp_* argument is set.
mar	Number of lines below/left-of/above/right-of plot region.
sf_vert	Scale factor for vertical lines corresponding to lc_verts, tp_verts and al_verts. If a numeric value is provided, the height of each line equals the area of the corresponding lorentzian curve multiplied by sf_vert. In addition, the following strings are supported: • "auto": A suitable numeric value for sf_vert is chosen automatically, in a way that the highest integral equals the highest signal intensity after multiplication with sf_vert. • "peak": Vertical lines are drawn from bottom to top of the corresponding peak. • "full": Vertical lines are drawn over the full vertical range of the plot region.
si_line, sm_line, sp_line, al_line, d2_line, lc_lines, tp_lines, al_lines	List of parameters passed to lines() when drawing the raw signal intensities (si_line), smoothed signal intensities (sm_line), superposition of lorentzian curves (sp_line), aligned lorentzian curves (al_line), second derivative (d2_line), lorentzian curves found by deconvolution (lc_lines), true lorentzian curves (tp_lines) and aligned lorentzian curves (al_lines), respectively.

`cent_pts`, `bord_pts`, `norm_pts`
: List of parameters passed to `points()` when drawing the peak center points, peak border points and non-peak points.

`bg_rect`, `lc_rects`, `foc_rect`, `tp_rects`
: List of parameters passed to `rect()` when drawing the background, lorentzian curve substitutes, focus rectangle and/or true lorentzian curve substitutes.

`bt_axis`, `lt_axis`, `tp_axis`, `rt_axis`
: List of parameters used to overwrite the default values passed to `axis()` when drawing the bottom, left, top and right axis. In addition to the parameters of `axis()`, the following additional parameters are supported as well:

  - `n`: Number of tickmarks.
  - `digits`: Number of digits for rounding the labels. If a vector of numbers is provided, all numbers are tried, until `n` unique labels are found. See 'Details'.
  - `sf`: Scaling factor. Axis values are divided by this number before the labels are calculated. If you set this to anything unequal 1, you should also set the corresponding margin text in a way that reflects the scaling. Example: by default, a scaling factor of 1e6 is used for drawing signal intensities and a scaling factor of 1 for drawing the second derivative. To make clear, that the user should be careful when interpreting the signal intensity values, the corresponding margin text is set to "Signal Intensity [au]" where "au" means "Arbitrary Units", indicating that the values might be scaled.

`bt_text`, `lt_text`, `tp_text`, `rt_text`
: List of parameters used to overwrite the default values passed to `mtext()` when drawing the bottom, left, top and right margin texts (i.e. the axis labels).

`lc_verts`, `tp_verts`, `al_verts`
: List of parameters passed to `segments()` when drawing vertical lines at the centers of estimated, true or aligned lorentzian curves. Setting `tp_verts$show` to TRUE requires `truepar` to be set.

`ze_hline`
: List of parameters passed to `abline()` when drawing a horizontal line at y = 0.

`al_arrows`
: List of parameters passed to `arrows()` when drawing arrows between the estimated and aligned lorentzian curve centers.

`lgd`
: List of parameters passed to `legend()` when drawing the legend.

Details

Parameters `bt_axis`, `lt_axis`, `tp_axis` and `rt_axis` all support option `n` and `digits`, where `n = 5` means "Draw 5 tickmarks over the full axis range" and `digits = 3` means "round the label shown beside each tickmark to 3 digits". If `n` or `digits` is omitted, a suitable value is chosen automatically. Providing a vector of `digits` causes each digit to be tried until a digit is encountered that results in `n` unique labels. Example:

Assume we have `n = 4` and the corresponding calculated tickmark positions are: 1.02421, 1.02542, 1.02663 and 1.02784. If we provide `digits = 1:5`, the following representations are tried:

digit	label 1	label 2	label 3	label 4
1	1.0	1.0	1.0	1.0

2	1.02	1.03	1.03	1.03
3	1.024	1.025	1.027	1.028
4	1.0242	1.0254	1.0266	1.0278
5	1.02421	1.02542	1.02663	1.02784

In the above example the process would stop at `digit = 3`, because at this point we have n = 4 unique labels (1.024, 1.025, 1.027 and 1.028).

Value

NULL. Called for side effect of plotting.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
decon <- deconvolute(sim[[1]], sfr = c(3.55, 3.35))
draw_spectrum(obj = decon)
draw_spectrum(obj = decon, lgd = list(x = "top", bg = NA))
draw_spectrum(obj = decon, foc_rgn = c(3.45, 3.37))
draw_spectrum(obj = decon, add = FALSE, lgd = FALSE,
              fig = c(.2, .8, .2, .4), mar = c( 0,  0,  0,  0))
draw_spectrum(obj = decon, add = TRUE, lgd = FALSE,
              fig = c(0.2, 0.8, 0.6, 0.8), mar = c(0, 0, 0, 0))
draw_spectrum(obj = decon, lc_lines = NULL, lc_rects = NULL, foc_only = FALSE)
```

`evalwith` *Evaluate an expression with predefined global state*

Description

Evaluates an expression with a predefined global state, including the:

- working directory (set via `setwd()`)
- global options (set via `options()`)
- graphical parameters (set via `par()`)

In addition to that, `evalwith` allows to:

- Redirect or capture the output and/or message stream via `sink()`
- Measure the runtime of the evaluated expression via `system.time()`
- Creating a temporary test directory (inside `tmpdir()`) and populating it with input files according to `inputs`
- Predefine answers for calls to `readline()` happening during evaluation of `expr`
- Caching the result of the expression

All changes to the global state are reverted after the expression has been evaluated.

Usage

```
evalwith(
  expr,
  testdir = NULL,
  answers = NULL,
  output = NULL,
  message = NULL,
  plot = NULL,
  datadir_temp = c("default", "missing", "empty", "filled")[1],
  datadir_persistent = c("default", "missing", "empty", "filled")[1],
  inputs = character(),
  opts = NULL,
  pars = NULL,
  cache = FALSE,
  overwrite = FALSE
)
```

Arguments

expr	Expression to be evaluated.
testdir	ID of the test directory. E.g. "xyz/2". Will be created and populated with inputs. To clear, use clear(testdir("xyz/2")).
answers	Answers to be returned by readline().
output	Path to the file where output stream should be redirected to. Use "captured" to capture the output.
message	Path to the file where message stream be redirected to. Use "captured" to capture the messages.
plot	An expression opening a device, the string "captured" or a path ending in ".pdf", ".svg", or ".png". Examples: svg("tmp.svg"), quote(pdf("tmp.pdf")), "captured", "tmp.png". Passing "captured" is equivalent to passing tempfile(fileext = ".png").
datadir_temp	State of the mocked temporary data directory. See details section.
datadir_persistent	State of the mocked persistent data directory. See details section.
inputs	Paths to be copied to the test directory before evaluating expr.
opts	Named list of options to be set. See options().
pars	Named list of parameters to be set. See par().
cache	Logical indicating whether to cache the result of the expression.
overwrite	Logical indicating whether to overwrite the cache file if it already exists.

Details

The datadir_temp and datadir_persistent arguments accept values "missing", "filled" and "empty". Setting a value unequal NULL causes the functions datadir_temp() and/or datadir_persistent()

to be replaced with mock functions pointing to fake directories. Functions depending on these functions will then use the fake directories instead of the real ones. When set to "missing" the returned mock directory does not exist. When set to "empty" it exists and is guaranteed to be empty. When set to "filled", it is populated with example datasets.

Attention: the mocked functions, i.e. `datadir_temp()` and `datadir_persistent()` cannot be used directly inside `expr` when called via `devtools::test()`. I'm not sure why, but it seems as if devtools and/or testthat have their own copies of the functions which are used when the expression is evaluated.

Value

A list containing with following elements:

- `rv`: The return value of the expression.
- `runtime`: The "elapsed" runtime of the expression in seconds. Measured with `system.time()`.
- `output`: The captured output.
- `message`: The captured messages.
- `plot`: The path to the saved plot.
- `testdir`: The path to the test directory.
- `inputs`: The paths to the copied input files.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
x1 <- evalwith(output = "captured", cat("Helloworld\n"))
str(x1)

x2 <- evalwith(datadir_persistent = "missing", message = "captured", datadir())
str(x2)

x3 <- evalwith(testdir = "dummy", inputs = "bruker/urine/urine_1", dir())
str(x3)

x4 <- evalwith(Sys.sleep(0.02))
str(x4)
```

`gen_feat_mat` *Generate Feature Matrix.*

Description

Helper function of `align()`. Should not be called directly by the user.

Generates a list of elements required by `speaq_align()`. See 'Value' for a detailed description of the list elements.

Direct usage of this function has been deprecated with metabodecon version 1.4.3 and will be removed with metabodecon version 2.0.0.

[Deprecated]

Usage

```
gen_feat_mat(
  data_path,
  ppm_range = get_ppm_range(data_path),
  si_size_real_spectrum = length(data_path$y_values),
  scale_factor_x = 1000,
  warn = TRUE
)
```

Arguments

`data_path`	A list of deconvoluted spectra as returned by `generate_lorentz_curves()`. In older versions, this could also be the path passed to `generate_lorentz_curves()`, but this is deprecated and will trigger a warning. See 'Details' for more information.
`ppm_range`	The ppm range over which your signals are distributed.
`si_size_real_spectrum`	Number of data points in your spectra.
`scale_factor_x`	The x scale factor used during the deconvolution.
`warn`	Whether to print a warning in case a file path is passed to `data_path` instead of a list of deconvoluted spectra.

Details

Before version 1.2 of metabodecon, the deconvolution functions `generate_lorentz_curves` and `MetaboDecon1D` wrote their output partially as txt files to their input folder. Back then, `gen_feat_mat()` used those txt files as input to generate the feature matrix. Since version 1.2 these txt files are no longer created by default, to prevent accidental modifications of the input folders. Therefore, the recommended way to pass the required information to `gen_feat_mat()` is to directly pass the output of `generate_lorentz_curves()` to `gen_feat_mat()`. However, to stay backwards compatible, the name of parameter `data_path` was not changed and passing an actual path to `data_path` is still possible, but will result in a warning (unless `warn` is set to `FALSE`).

Value

A list with the following elements:

`data_matrix`: A data.frame where each row corresponds to one spectrum and each column to one data point, i.e. for 10 input spectra with 131072 data points each `data_matrix` would have dimensions 10 x 131072.

`peakList`: A list of vectors, where each vector contains the indices of the peaks in the corresponding spectrum. The indices increase from left to right, i.e. the smallest index corresponds to the highest ppm value, as the ppm values decrease from left to right.

`w`: A list of vectors where each vector contains the "position parameter" of the peaks in the corresponding spectrum.

`A`: A list of vectors where each vector contains the "area parameter" of the peaks in the corresponding spectrum.

`lambda`: A list of vectors where each vector contains the "width parameter" of the peaks in the corresponding spectrum.

Author(s)

2021-2024 Wolfram Gronwald: initial version.
2024-2025 Tobias Schmidt: refactored initial version.

Examples

```
sim_subset <- metabodecon_file("sim_subset")
decons <- generate_lorentz_curves_sim(sim_subset)
obj <- gen_feat_mat(decons)
str(obj, 2, give.attr = FALSE)
```

`generate_lorentz_curves` *Deconvolute one or more NMR spectra*

Description

Deconvolutes NMR spectra by modeling each detected signal within a spectrum as Lorentz Curve.

This function has been deprecated with metabodecon version v1.4.3 and will be removed with version 2.0.0. Please use `deconvolute()` instead.

[Deprecated]

Usage

```
generate_lorentz_curves(
  data_path,
  file_format = "bruker",
  make_rds = FALSE,
  expno = 10,
  procno = 10,
  raw = TRUE,
  nfit = 10,
```

```
  smopts = c(2, 5),
  delta = 6.4,
  sfr = c(11.44494, -1.8828),
  wshw = 0.1527692,
  ask = TRUE,
  force = FALSE,
  verbose = TRUE,
  nworkers = 1
)

generate_lorentz_curves_sim(
  data_path,
  file_format = "bruker",
  make_rds = FALSE,
  expno = 10,
  procno = 10,
  raw = TRUE,
  nfit = 10,
  smopts = c(2, 5),
  delta = 6.4,
  sfr = c(3.55, 3.35),
  wshw = 0,
  ask = FALSE,
  force = FALSE,
  verbose = FALSE,
  nworkers = 1
)
```

Arguments

data_path	The path of the file/folder containing the spectrum data. E.g. "example_datasets/jcampdx/urine/urir or "example_datasets/bruker/urine/urine".
file_format	The file_format of the spectrum file. E.g. "bruker" or "jcampdx".
make_rds	Logical or character. If TRUE, stores results as an RDS file on disk. If a character string, saves the RDS file with the specified name. Should be set to TRUE if many spectra are evaluated to decrease computation time.
expno, procno	The experiment/processing number for the file. E.g. "10". Only relevant if file_format equals "bruker". For details see section File Structure in the metabodecon FAQ.
raw	If FALSE, scales the returned signal intensities based on information available in the spectrum metadata, in particular NC_proc. For details see processing-reference.pdf, available at https://www.bruker.com/en.html at section 'Services & Support > Documentation & Manuals > Magnetic Resonance > Acquisition & Processing > TopSpin Processing Commands and Parameters' (requires login).
nfit	Integer. Number of iterations for approximating the parameters for the Lorentz curves. See 'Details'.
smopts	Numeric vector with two entries: the number of smoothing iterations and the number of data points to use for smoothing (must be odd). See 'Details'.

`delta`	Threshold for peak filtering. Higher values result in more peaks being filtered out. A peak is filtered if its score is below $\mu + \sigma \cdot \delta$, where μ is the average peak score in the signal-free region (SFR), and σ is the standard deviation of peak scores in the SFR. See 'Details'.
`sfr`	Numeric vector with two entries: the ppm positions for the left and right border of the signal-free region of the spectrum. See 'Details'.
`wshw`	Half-width of the water artifact in ppm. See 'Details'.
`ask`	Logical. Whether to ask for user input during the deconvolution process. If FALSE, the provided default values will be used.
`force`	If `TRUE`, try to continue when encountering errors and print info messages instead. To hide these messages as well, set `silent = TRUE`.
`verbose`	Logical. Whether to print log messages during the deconvolution process.
`nworkers`	Number of workers to use for parallel processing. If `"auto"`, the number of workers will be determined automatically. If a number greater than 1, it will be limited to the number of spectra.

Details

First, an automated curvature based signal selection is performed. Each signal is represented by 3 data points to allow the determination of initial Lorentz curves. These Lorentz curves are then iteratively adjusted to optimally approximate the measured spectrum.

`generate_lorentz_curves_sim()` is identical to `generate_lorentz_curves()` except for the defaults, which are optimized for deconvoluting the 'sim' dataset, shipped with 'metabodecon'. The 'sim' dataset is a simulated dataset, which is much smaller than a real NMR spectra and lacks a water signal. This makes it ideal for use in examples. However, the default values for `sfr`, `wshw`, and `delta` in the "normal" `generate_lorentz_curves()` function are not optimal for this dataset. To avoid having to define the optimal parameters repeatedly in examples, this function is provided to deconvolute the "Sim" dataset with suitable parameters.

Value

A 'decon1' object if a single spectrum was provided. A 'decons1' object if multiple spectra were provided. See Metabodecon Classes for details.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
## Define the paths to the example datasets we want to deconvolute:
## `sim_dir`: directory containing 16 simulated spectra
## `sim_01`: path to the first spectrum in the `sim` directory
## `sim_01_spec`: the first spectrum in the `sim` directory as a dataframe

sim_dir        <- metabodecon_file("sim_subset")
sim_1_dir      <- file.path(sim_dir, "sim_01")
sim_2_dir      <- file.path(sim_dir, "sim_02")
```

```
sim_1_spectrum <- read_spectrum(sim_1_dir)
sim_2_spectrum <- read_spectrum(sim_2_dir)
sim_spectra    <- read_spectra(sim_dir)


## Show that `generate_lorentz_curves()` and `generate_lorentz_curves_sim()`
## produce the same results:

sim_1_decon0 <- generate_lorentz_curves(
    data_path = sim_1_dir, # Path to directory containing spectra
    sfr = c(3.55, 3.35),   # Borders of signal free region (SFR) in ppm
    wshw = 0,              # Half width of water signal (WS) in ppm
    ask = FALSE,           # Don't ask for user input
    verbose = FALSE        # Suppress status messages
)
sim_1_decon1 <- generate_lorentz_curves_sim(sim_1_dir)
stopifnot(all.equal(sim_1_decon0, sim_1_decon1))


## Show that passing a spectrum produces the same results as passing the
## the corresponding directory:

decon_from_spectrum_dir <- generate_lorentz_curves_sim(sim_1_dir)
decon_from_spectrum_obj <- generate_lorentz_curves_sim(sim_1_spectrum)
decons_from_spectra_obj <- generate_lorentz_curves_sim(sim_spectra)
decons_from_spectra_dir <- generate_lorentz_curves_sim(sim_dir)

most.equal <- function(x1, x2) {
    ignore <- which(names(x1) %in% c("number_of_files", "filename"))
    equal <- all.equal(x1[-ignore], x2[-ignore])
    invisible(stopifnot(isTRUE(equal)))
}

all.equal(  decon_from_spectrum_dir, decon_from_spectrum_obj     )
all.equal(  decons_from_spectra_dir, decons_from_spectra_obj     )
most.equal( decon_from_spectrum_dir, decons_from_spectra_obj[[1]])
most.equal( decon_from_spectrum_dir, decons_from_spectra_dir[[1]])
```

`get_data_dir` *Retrieve directory path of an example dataset*

Description

Returns the path to the directory storing the example files shipped with metabodecon.

Deprecated since metabodecon v1.2.0. Please use `datadir()` instead. See examples below for usage.

[Deprecated]

Usage

```
get_data_dir(dataset_name = c("", "blood", "test", "urine"), warn = TRUE)
```

Arguments

dataset_name	Either "", "test", "blood" or "urine".
warn	Whether to print a warning message when the example folders do not yet exist, i.e. download_example_datasets() has not been called yet.

Value

Path to the directory storing the example files.

Author(s)

2024-2025 Tobias Schmidt: initial version.

See Also

download_example_datasets()

Examples

```
x <- get_data_dir("urine")                    # Deprecated
y <- datadir("example_datasets/bruker/urine")  # Preferred
cat(x, y, sep = "\n")
```

---

get_ppm_range *Get PPM Range covered by Spectra*

Description

Helper function of `align()`. Should not be called directly by the user.

Returns the ppm range across all peaks of the provided deconvoluted spectra.

Direct usage of this function has been deprecated with metabodecon version 1.4.3 and will be removed with metabodecon version 2.0.0.

[Deprecated]

Usage

```
get_ppm_range(spectrum_data, full_range = FALSE)
```

Arguments

spectrum_data	A list of deconvoluted spectra as returned by generate_lorentz_curves().
full_range	If TRUE, the full range of the spectra is returned. If FALSE, only the range from the lowest to the highest peak center is returned.

Value

A vector containing the lowest and highest ppm value over all peaks of the provided deconvoluted spectra.

Author(s)

2021-2024 Wolfram Gronwald: initial version.
2024-2025 Tobias Schmidt: refactored initial version.

Examples

```
spectrum_data <- generate_lorentz_curves(
    data_path = sim[1:2],
    nfit = 3,
    sfr = c(3.55, 3.35),
    wshw = 0,
    ask = FALSE,
    verbose = FALSE
)
ppm_rng <- get_ppm_range(spectrum_data)
print(ppm_rng)
```

---

get_si_mat *Extract Matrix of aligned Signal Intensities*

Description

Takes an object of type `aligns`, i.e., a list of deconvoluted and aligned spectra, extracts the vector of aligned signal integrals for each spectrum and returns them as a matrix with datapoints in rows and spectra in columns.

Usage

```
get_si_mat(x)
```

Arguments

`x`	An object of type `aligns`.

Value

A matrix of aligned signal intensities.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
if (interactive()) {
    # Example requires an interactive R session, because in case of missing
    # dependencies the user will be asked for confirmation to install them.
    decons <- deconvolute(sim[1:2], sfr = c(3.55, 3.35))
    aligns <- align(decons)
    si_mat <- get_si_mat(aligns) # 2048 x 2 matrix (2048 datapoints, 2 spectra)
}
```

`install_mdrb` *Install Rust Backend*

Description

Installs metabodecon's Rust backend mdrb from R-Universe.

lifecycle::badge("experimental")

Usage

```
install_mdrb(ask = TRUE, ...)
```

Arguments

`ask`	Whether to ask for confirmation before attempting installation. Default is TRUE.
`...`	Additional arguments to pass to `utils::install.packages()` when attempting installation of mdrb.

Value

NULL. Called for side effect of installing the Rust backend.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
if (interactive()) try(install_mdrb())
```

`is_metabodecon_class` *Is an Object from a Metabodecon Class?*

Description

Check if an object is an instance of a specific 'Metabodecon Class'. See Metabodecon Classes for a list of classes.

Usage

```
is_spectrum(x, check_class = TRUE, check_contents = FALSE)

is_decon0(x)

is_decon1(x)

is_decon2(x)

is_align(x)

is_spectra(
  x,
  check_class = TRUE,
  check_contents = FALSE,
  check_child_classes = FALSE
)

is_decons0(x)

is_decons1(x)

is_decons2(x)

is_aligns(x)
```

Arguments

`x`	The object to check.
`check_class`	Logical indicating whether to check the class of the object.
`check_contents`	Logical indicating whether to check the contents of the object.
`check_child_classes`	Logical indicating whether to check the class of each element of the object.

Value

TRUE if the object is an instance of the specified class, otherwise FALSE.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
ss <- sim[1:2]
s1 <- sim[[1]]
is_spectra(ss) # TRUE
is_spectrum(s1) # TRUE
is_spectrum(s1, check_contents = TRUE) # TRUE

dd <- deconvolute(ss, sfr = c(3.55, 3.35))
d1 <- dd[[1]]
is_decons0(dd) # FALSE
is_decons1(dd) # FALSE
is_decons2(dd) # TRUE
is_decon0(d1) # FALSE
is_decon1(d1) # FALSE
is_decon2(d1) # TRUE

if (interactive()) {
    # Example requires an interactive R session, because in case of missing
    # dependencies the user will be asked for confirmation to install them.
    aa <- align(dd)
    a1 <- aa[[1]]
    is_align(a1) # TRUE
    is_aligns(aa) # TRUE
}
```

---

make_spectrum *Create a Spectrum Object*

Description

Creates a spectrum object from the provided signal intensities, frequencies and chemical shifts.

Usage

```
make_spectrum(
  si,
  cs_max,
  cs_width,
  fq_ref,
  fq_width = NULL,
  force = FALSE,
  silent = FALSE,
  name = NULL,
  path = NULL,
```

```
  type = NULL,
  simpar = NULL,
  mfs = NULL
)
```

Arguments

si	Numeric vector of signal intensities, ordered from highest to lowest corresponding chemical shift.
cs_max	The highest chemical shift value in ppm, usually shown as left end of the spectrum.
cs_width	The width of the spectrum in ppm.
fq_ref	The reference frequency in Hz.
fq_width	The width of the spectrum in Hz. Only used to check whether the values calculated from cs_max, cs_width and fq_ref match the provided value. If NULL, this check will be skipped.
force	If TRUE, the function will not raise an error in case of discrepancies between the calculated and the provided spectrum width in Hz, but will print a info message instead. To hide this message as well, set silent = TRUE.
silent	If TRUE, no output will be printed to the console.
name	The name of the spectrum, e.g. "Blood 1" or "Urine Mouse X23D".
path	The path to the spectrum file, e.g. "/example_datasets/bruker/urine/urine_1".
type	The type of experiment, e.g. "H1 CPMG" or "H1 NOESY".
simpar	The simulation parameters used to generate the spectrum.
mfs	The magnetic field strength in Tesla.

Value

A spectrum object as described in Metabodecon Classes.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
si <- c(1, 1, 3, 7, 8, 3, 8, 5, 2, 1)
cs_max <- 14.8
cs_width <- 20.0
fq_ref <- 600.25 * 1e6
fq_width <- 12005
spectrum <- make_spectrum(si, cs_max, cs_width, fq_ref, fq_width)
spectrum2 <- make_spectrum(si, cs_max, cs_width, fq_ref, fq_width = 12010, force = FALSE)
```

metabodecon_file *Return Path to File or Directory in metabodecon Package*

Description

Recursively searches for files or directories within the 'metabodecon' package that match the given name.

Usage

```
metabodecon_file(name = "sim_01")
```

Arguments

name	The name to search for.

Value

The file or directory path.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
# Unambiguous paths
metabodecon_file("urine_1")
metabodecon_file("urine_1.dx")
metabodecon_file("sim/sim_01")

# Ambiguous paths (i.e. multiple matches)
metabodecon_file("sim")
metabodecon_file("urine")

# Non-existing paths (i.e. a character vector of length zero gets returned)
metabodecon_file("asdfasdf")
```

MetaboDecon1D *Deconvolute 1D NMR spectrum*

Description

Automatic deconvolution of a 1D NMR spectrum into several Lorentz curves and the integration of them. The NMR file needs to be in Bruker format or jcamp-dx format.

This function has been deprecated with metabodecon version v1.2.0 and will be removed with version 2.0.0. Please use `deconvolute()` instead.

[Deprecated]

Usage

```
MetaboDecon1D(
  filepath,
  filename = NA,
  file_format = "bruker",
  number_iterations = 10,
  range_water_signal_ppm = 0.1527692,
  signal_free_region = c(11.44494, -1.8828),
  smoothing_param = c(2, 5),
  delta = 6.4,
  scale_factor = c(1000, 1e+06),
  debug = FALSE,
  store_results = NULL
)
```

Arguments

filepath	Complete path of the file folder (Notice for Bruker format: filepath needs to be the spectrum folder containing one or more different spectra (e.g."C:/Users/Username/Desktop/spectra_fr
filename	Name of the NMR file. (Notice for Bruker format: filename need to be the name of your spectrum which is also the name of the folder) (Default: filename = NA to analyze more spectra at once)
file_format	Format (bruker or jcampdx) of the NMR file. (Default: file_format = "bruker")
number_iterations	Number of iterations for the approximation of the parameters for the Lorentz curves (Default: number_iterations=10)
range_water_signal_ppm	Half width of the water artefact in ppm (Default: range_water_signal=0.1527692 (e.g. for urine NMR spectra))
signal_free_region	Row vector with two entries consisting of the ppm positions for the left and right border of the signal free region of the spectrum. (Default: signal_free_region=c(11.44494, -1.8828))
smoothing_param	Row vector with two entries consisting of the number of smoothing repeats for the whole spectrum and the number of data points (uneven) for the mean calculation (Default: smoothing_param=c(2,5))
delta	Defines the threshold value to distinguish between signal and noise (Default: delta=6.4)
scale_factor	Row vector with two entries consisting of the factor to scale the x-axis and the factor to scale the y-axis (Default: scale_factor=c(1000,1000000))
debug	Logical value to activate the debug mode (Default: debug=FALSE)
store_results	Specifies whether the lorentz curve parameters A, lambda and x_0 and the approximated spectrum should be stored on disk (in addition to returning them). If store_results is NULL (default), the user is asked interactively where the files should be stored. If FALSE, the results are not stored. If TRUE, the results are stored in a subdirectory of R's per-session temporary directory.

Value

A `decon0` object as described in Metabodecon Classes.

Author(s)

2020-2021 Martina Haeckl: initial version.
2024-2025 Tobias Schmidt: Minor updates to pass CRAN checks. Parameters debug and `store_results` added.

References

Haeckl, M.; Tauber, P.; Schweda, F.; Zacharias, H.U.; Altenbuchinger, M.; Oefner, P.J.; Gronwald, W. An R-Package for the Deconvolution and Integration of 1D NMR Data: MetaboDecon1D. Metabolites 2021, 11, 452. https://doi.org/10.3390/metabo11070452

See Also

`calculate_lorentz_curves()`, `plot_triplets()`, `plot_lorentz_curves_save_as_png()`, `plot_spectrum_superpos`

Examples

```
## ATTENTION: using MetaboDecon1D() for deconvolution is deprecated. Please use
## deconvolute() instead.

## The following example shows how a subset of the Sim dataset, consisting
## of two spectrum objects, can be deconvoluted using `MetaboDecon1D()`. The
## whole example code is wrapped into `evalwith()` to simulate user input.
## When using the function interactively, you should type in the answers to
## the questions manually.
expected_answers <- c(
     "10",   # Subfolder of your filepath, i.e. the experiment number?
     "10",   # Subsubsubfolder of filepath, i.e. the processing number?
     "y",    # Use same parameters for all spectra?
     "1",    # File to adjust all parameters.
     "n",    # Signal free region borders correct selected?
     "3.55", # Left border.
     "3.35", # Right border.
     "y",    # Signal free region borders correct selected?
     "n",    # Water artefact fully inside red vertical lines?
     "0",    # Half width range (in ppm) for the water artefact.
     "y",    # Water artefact fully inside red vertical lines?
     "n"     # Save results as text documents?
)
sim <- metabodecon_file("bruker/sim_subset")
evalwith(answers = expected_answers, {
     sim_decon <- MetaboDecon1D(sim)
})

## Deconvolute only the first spectrum of the folder "bruker/sim_subset" into
evalwith(answers = expected_answers[-(3:4)], {
     sim_decon <- MetaboDecon1D(sim, filename = "sim_01")
```

```
})
```

`plot_lorentz_curves_save_as_png` *Plot lorentz curves for variable range*

Description

Plots the original spectrum and all generated Lorentz curves and save the result as png under the filepath.

Superseded by `plot_spectrum()` since metabodecon v1.2.0. Will be replaced with metabodecon v2.

[Deprecated]

Usage

```
plot_lorentz_curves_save_as_png(
  deconv_result,
  x_range = c(),
  y_range = c(),
  out_dir = ".",
  ask = TRUE
)
```

Arguments

`deconv_result`	Saved result of the MetaboDecon1D() function
`x_range`	Row vector with two entries consisting of the ppm start and the ppm end value to scale the range of the x-axis (optional)
`y_range`	Row vector with two entries consisting of the ppm start and the ppm end value to scale the range of the y-axis (optional)
`out_dir`	Path to the directory where the png files should be saved. Default is the current working directory.
`ask`	Logical value. Whether to ask for confirmation from the user before writing files to disk. Default is TRUE.

Value

NULL, called for side effects.

Author(s)

2020-2021 Martina Haeckl: initial version.
2024-2025 Tobias Schmidt: Minor updates to pass CRAN checks

See Also

MetaboDecon1D(), plot_triplets(), plot_spectrum_superposition_save_as_png()

Examples

```
sim <- metabodecon_file("bruker/sim_subset")
sim_decon <- generate_lorentz_curves_sim(sim)
png_dir <- tmpdir("sim_decon/pngs", create = TRUE)
plot_lorentz_curves_save_as_png(sim_decon, out_dir = png_dir, ask = FALSE)
dir(png_dir, full.names = TRUE)
```

---

plot_spectra *Plot Spectra*

Description

Plot a set of deconvoluted spectra.

Usage

```
plot_spectra(
  obj,
  ...,
  sfy = 1e+06,
  xlab = "Chemical Shift [ppm]",
  ylab = paste("Signal Intensity [au] /", sfy),
  mar = c(4.1, 4.1, 1.1, 0.1),
  lgd = TRUE
)
```

Arguments

obj	An object of type decons0, decons1 or decons2. For details see Metabodecon Classes.
...	Additional arguments passed to the conversion function.
sfy	Scaling factor for the y-axis.
xlab	Label for the x-axis.
ylab	Label for the y-axis.
mar	A numeric vector of length 4, which specifies the margins of the plot.
lgd	Logical. If TRUE, a legend is drawn.

Value

A plot of the deconvoluted spectra.

Author(s)

2024-2025 Tobias Schmidt: initial version.

See Also

plot_spectrum() for a much more sophisticated plotting routine suitable for plotting a single spectrum.

Examples

```
obj <- deconvolute(sim[1:4], sfr = c(3.55, 3.35))
plot_spectra(obj)
```

---

plot_spectrum *Plot Spectrum*

Description

Plot a spectrum and zoom in on a specific region.

[Experimental]

Usage

```
plot_spectrum(
  x,
  ...,
  obj = as_v12_singlet(x),
  foc_frac = get_foc_frac(obj),
  foc_rgn = get_foc_rgn(obj, foc_frac),
  sub1 = TRUE,
  sub2 = FALSE,
  sub3 = width(foc_rgn) < width(obj$cs),
  mar = NULL,
  frame = FALSE,
  con_lines = TRUE
)
```

Arguments

x	An object of type spectrum, decon0, decon1, decon2 or align. For details see Metabodecon Classes.
...	Additional arguments passed to draw_spectrum() for **every** sub figure. See 'Details'.
obj	An object of type spectrum or decon2. Usually auto generated from x, but can be set manually in case the default conversion is not sufficient.

foc_frac	A numeric vector specifying the start and end of the focus region as fraction of the full spectrum width. Only used if foc_rgn is set to NULL.
foc_rgn	A numeric vector specifying the start and end of the focus region in ppm. If set to NULL, foc_frac is used to determine the focus region. If both foc_rgn and are set to NULL, a suitable focus region is chosen automatically. Takes precedence over foc_frac.
sub1, sub2, sub3	List of arguments passed to draw_spectrum() when drawing sub figure 1-3. See 'Details'.
mar	A numeric vector of length 4 specifying the margins of the plot. Passed to par(). If set to NULL, a suitable value is chosen automatically.
frame	A list of values passed to box() when drawing the frame around plot region. If set to NULL, no frame is drawn.
con_lines	A list of values passed to lines() when drawing the connecting lines between sub figure 1 and the focus rectangle in sub figure 3. See 'Details'. If set to NULL, the connecting lines are not drawn.


Details


This function first initializes a new plotting canvas. After that it calls draw_spectrum() multiple times to draw the following sub figures onto the plotting canvas:

1. The signal intensities in the focus region
2. The second derivative in the focus region
3. The signal intensities over all datapoints


The argument lists for the individual calls to draw_spectrum() are determined at runtime and depend on the arguments passed to plot_spectrum() as well as the currently active graphics device. To customize the appearance of the individual sub plots, you can overwrite each value passed to draw_spectrum() by providing a corresponding named element in sub1, sub2 or sub3.

A sketch of the resulting figure is shown below.

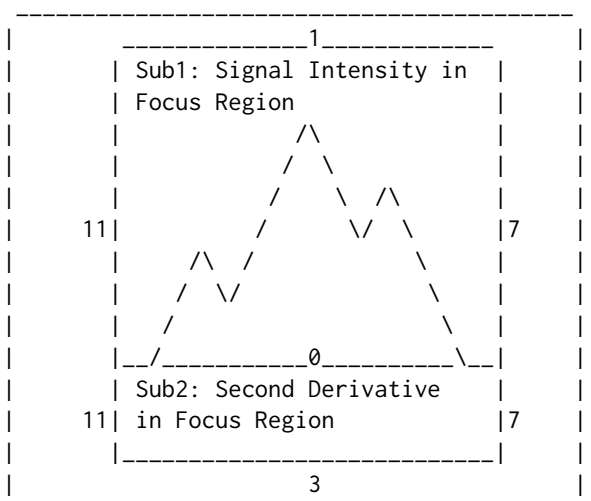

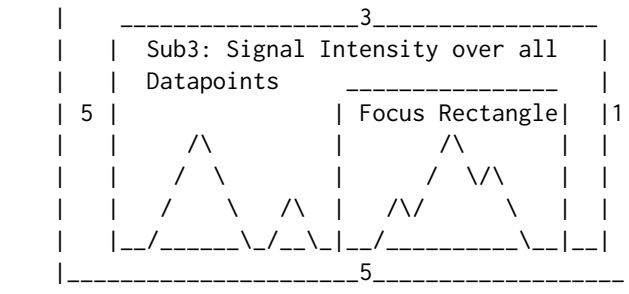

Note that the figure created by `plot_spectrum()` can be part of a multi-figure configuration as created when setting `mfrow` or `mfcol` via `par()`. Example:

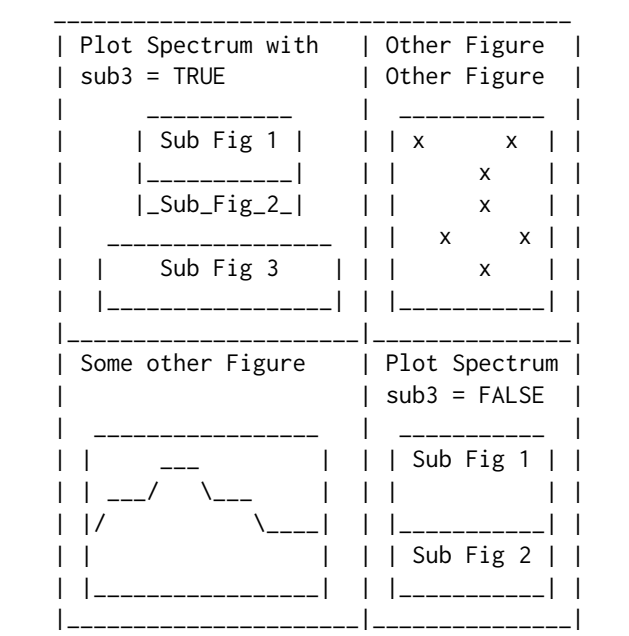

Value

NULL. Called for side effect of plotting as sketched in 'Details'.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
## 1. Prepare a deconvoluted spectrum as input

spec <- read_spectrum(metabodecon_file("sim/sim_01"))
decon <- generate_lorentz_curves_sim(spec)
```

```
## 2.1. Plot the full (non-deconvoluted) spectrum
## 2.2. Remove connecting lines, and focus on a specific region specified in ppm
## 2.3. Show second derivative and focus on a specific region specified as fraction
## 2.4. Change color of focus rectangle and margins of sub figure 1
## 2.5. Hide xlab and show second derivative
## 2.6. Change the figure region for sub figure 1

plot_spectrum(spec, sub1 = FALSE)
plot_spectrum(decon, foc_rgn = c(3.49, 3.45), con_lines = FALSE)
plot_spectrum(decon, sub2 = TRUE, foc_frac = c(0.40, 0.30))
plot_spectrum(decon,
    sub1 = list(mar = c(3, 6, 3, 6), lt_axis = list(col = "violet")),
    foc_rect = list(border = "violet", col = transp("violet")),
    con_lines = list(col = "violet")
)
plot_spectrum(decon,
    sub2 = TRUE,
    sub3 = list(bt_text = list(text = "")),
    frame = TRUE,
    con_lines = FALSE
)
plot_spectrum(decon, sub1 = list(fig_rgn_npc = c(0,1,.3,1), mar = c(0,5,0,0)))
```

`plot_spectrum_superposition_save_as_png` *Plot spectrum approx for variable range*

Description

Plots the original spectrum and the superposition of all generated Lorentz curves and saves the result as png under the specified filepath.

Superseded by `plot_spectrum()` since metabodecon v1.2.0. Will be replaced with v2.

[Deprecated]

Usage

```
plot_spectrum_superposition_save_as_png(
  deconv_result,
  x_range = c(),
  y_range = c(),
  out_dir = ".",
  ask = TRUE
)
```

Arguments

deconv_result	Saved result of the MetaboDecon1D() function
x_range	Row vector with two entries consisting of the ppm start and the ppm end value to scale the range of the x-axis (optional)
y_range	Row vector with two entries consisting of the ppm start and the ppm end value to scale the range of the y-axis (optional)
out_dir	Path to the directory where the png files should be saved. Default is the current working directory.
ask	Logical value. Whether to ask for confirmation from the user before writing files to disk.

Value

NULL, called for side effects.

Author(s)

2020-2021 Martina Haeckl: initial version.

See Also

MetaboDecon1D(), calculate_lorentz_curves(), plot_triplets(), plot_lorentz_curves_save_as_png()

Examples

```
sim <- metabodecon_file("bruker/sim_subset")
sim_decon <- generate_lorentz_curves_sim(sim)
png_dir <- tmpdir("sim_decon/pngs", create = TRUE)
plot_spectrum_superposition_save_as_png(sim_decon, out_dir = png_dir, ask = FALSE)
dir(png_dir, full.names = TRUE)
```

---

plot_triplets *Plot peak triplets for variable range*

Description

Plots the peak triplets for each peak detected by MetaboDecon1D() and stores the plots as png at outdir.

Superseded by plot_spectrum() since metabodecon v1.2.0. Will be replaced with v2.

[Deprecated]

Usage

```
plot_triplets(
  deconv_result,
  x_range = c(),
  y_range = c(),
  out_dir = ".",
  ask = TRUE
)
```

Arguments

deconv_result	Saved result of the MetaboDecon1D() function
x_range	Row vector with two entries consisting of the ppm start and the ppm end value to scale the range of the x-axis (optional)
y_range	Row vector with two entries consisting of the ppm start and the ppm end value to scale the range of the y-axis (optional)
out_dir	Directory to save the png files (optional)
ask	Logical value to ask the user if the png files should be saved in the specified directory (optional)

Value

No return value, called for side effect of plotting.

Author(s)

2020-2021 Martina Haeckl: initial version.
2024-2025 Tobias Schmidt: Minor updates to pass CRAN checks.

See Also

MetaboDecon1D(), calculate_lorentz_curves(), plot_lorentz_curves_save_as_png(), plot_spectrum_superpos

Examples

```
sim <- metabodecon_file("bruker/sim_subset")
sim_decon <- generate_lorentz_curves_sim(sim)
png_dir <- tmpdir("sim_decon/pngs", create = TRUE)
plot_triplets(sim_decon, out_dir = png_dir, ask = FALSE)
dir(png_dir, full.names = TRUE)
```

print_methods *S3 Methods for Printing Metabodecon Objects*

Description

S3 Methods for printing metabodecon objects as described in the Metabodecon Classes.

Usage

```
## S3 method for class 'spectrum'
print(x, name = FALSE, ...)

## S3 method for class 'decon1'
print(x, name = FALSE, ...)

## S3 method for class 'decon2'
print(x, name = FALSE, ...)

## S3 method for class 'align'
print(x, name = FALSE, ...)

## S3 method for class 'spectra'
print(x, ...)

## S3 method for class 'decons1'
print(x, ...)

## S3 method for class 'decons2'
print(x, ...)

## S3 method for class 'aligns'
print(x, ...)
```

Arguments

x	The object to print.
name	Logical. If TRUE, the name of the object is printed before the object.
...	Not used. Only accepted to comply with generic base::print().

Value

NULL, called for side effect of printing to the standard output device.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
print(sim[[1]])
print(sim[[1]], name = TRUE)
print(sim)
decon <- deconvolute(sim[[1]], sfr = c(3.55, 3.35))
print(decon)
```

`read_spectra` *Read one or more spectra from Disk*

Description

`read_spectrum()` reads a single spectrum from disk and returns it as `spectrum` object. `read_spectra()` can be used to read multiple spectra at once and returns a `spectra` object.

Usage

```
read_spectra(
  data_path = pkg_file("example_datasets/bruker/urine"),
  file_format = "bruker",
  expno = 10,
  procno = 10,
  raw = FALSE,
  silent = TRUE,
  force = FALSE
)
```

Arguments

`data_path`	The path of the file/folder containing the spectrum data. E.g. `"example_datasets/jcampdx/urine/urir` or `"example_datasets/bruker/urine/urine"`.
`file_format`	The file_format of the spectrum file. E.g. `"bruker"` or `"jcampdx"`.
`expno, procno`	The experiment/processing number for the file. E.g. `"10"`. Only relevant if `file_format` equals `"bruker"`. For details see section File Structure in the metabodecon FAQ.
`raw`	If `FALSE`, scales the returned signal intensities based on information available in the spectrum metadata, in particular `NC_proc`. For details see `processing-reference.pdf`, available at `https://www.bruker.com/en.html` at section 'Services & Support > Documentation & Manuals > Magnetic Resonance > Acquisition & Processing > TopSpin Processing Commands and Parameters' (requires login).
`silent`	If `TRUE`, no output will be printed to the console.
`force`	If `TRUE`, try to continue when encountering errors and print info messages instead. To hide these messages as well, set `silent = TRUE`.

Value

A `spectrum` object as described in Metabodecon Classes.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
relpath <- "example_datasets/bruker/urine"
urine <- system.file(relpath, package = "metabodecon")
urine_1 <- file.path(urine, "urine_1")
urine_2 <- file.path(urine, "urine_2")
x1 <- read_spectrum(urine_1)
x2 <- read_spectrum(urine_2)
xx <- read_spectra(urine)
str(xx)
str(x1)
stopifnot(all.equal(x1, xx$urine_1))
```

---

read_spectrum *Read one or more spectra from Disk*

Description

`read_spectrum()` reads a single spectrum from disk and returns it as `spectrum` object. `read_spectra()` can be used to read multiple spectra at once and returns a `spectra` object.

Usage

```
read_spectrum(
  data_path = metabodecon_file("bruker/sim/sim_01"),
  file_format = "bruker",
  expno = 10,
  procno = 10,
  raw = FALSE,
  silent = TRUE,
  force = FALSE
)
```

Arguments

`data_path`	The path of the file/folder containing the spectrum data. E.g. `"example_datasets/jcampdx/urine/urir` or `"example_datasets/bruker/urine/urine"`.
`file_format`	The file_format of the spectrum file. E.g. `"bruker"` or `"jcampdx"`.
`expno, procno`	The experiment/processing number for the file. E.g. `"10"`. Only relevant if `file_format` equals `"bruker"`. For details see section File Structure in the metabodecon FAQ.

raw	If FALSE, scales the returned signal intensities based on information available in the spectrum metadata, in particular NC_proc. For details see processing-reference.pdf, available at https://www.bruker.com/en.html at section 'Services & Support > Documentation & Manuals > Magnetic Resonance > Acquisition & Processing > TopSpin Processing Commands and Parameters' (requires login).
silent	If TRUE, no output will be printed to the console.
force	If TRUE, try to continue when encountering errors and print info messages instead. To hide these messages as well, set silent = TRUE.

Value

A spectrum object as described in Metabodecon Classes.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
relpath <- "example_datasets/bruker/urine"
urine <- system.file(relpath, package = "metabodecon")
urine_1 <- file.path(urine, "urine_1")
urine_2 <- file.path(urine, "urine_2")
x1 <- read_spectrum(urine_1)
x2 <- read_spectrum(urine_2)
xx <- read_spectra(urine)
str(xx)
str(x1)
stopifnot(all.equal(x1, xx$urine_1))
```

---

sap *The SAP Dataset*

Description

The SAP Dataset consists of a single 'Simple-As-Possible' (SAP) spectrum. The purpose of the SAP spectrum is to provide a straightforward example that can be used to test and understand the deconvolution algorithm in detail.

Usage

```
sap
```

Format

An object of class spectra of length 1.

Details

The first (and only) spectrum within the SAP dataset contains 128 datapoints ranging from -6.4 to 6.4 ppm with four peaks. A rough sketch of the spectrum is shown below:

```
_~-~-~-
```

Usage

```
simulate_spectrum(
  name = "sim_00",
  seed = sum(utf8ToInt(name)),
  ndp = 2048,
  npk = 10,
  csres = 0.00015,
  cs = seq(from = 3.6, length.out = ndp, by = -csres),
  pkr = quantile(cs, c(0.25, 0.75)),
  fqref = 600252806.95,
  x0 = sort(runif(npk, pkr[1], pkr[2])),
  A = runif(npk, 2.5, 20) * 1000,
  lambda = runif(npk, 0.9, 1.3)/1000,
  noise = rnorm(length(cs), sd = 1200)
)
```

Arguments

name	The name of the spectrum.
seed	The seed for the random number generator.
ndp	The number of data points in the spectrum.
npk	The number of peaks in the spectrum.
csres	The chemical shift resolution in PPM.
cs	The vector of chemical shifts in PPM.
pkr	The start and stop of the peak region in PPM.
fqref	The reference frequency in Hz.
x0	The peak center positions in PPM.
A	The peak area parameter.
lambda	The peak width parameter.
noise	The noise to add to the spectrum.

Value

A `spectrum` object as described in Metabodecon Classes.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
simA <- simulate_spectrum("simA")
simA_copy <- simulate_spectrum("simA")
simB <- simulate_spectrum("simB")
simC <- simulate_spectrum("simC", npk = 20)
plot_spectrum(simC)
```

```
if (!identical(simA, simA_copy)) stop()
if ( identical(simA, simB     )) stop()
```

`speaq_align` *Align Signals using 'speaq'*

Description

Helper function of `align()`. Should not be called directly by the user.

Performs signal alignment across the individual spectra using the 'speaq' package (Beirnaert C, Meysman P, Vu TN, Hermans N, Apers S, Pieters L, et al. (2018) speaq 2.0: A complete workflow for high-throughput 1D NMRspectra processing and quantification. PLoS Comput Biol 14(3): e1006018. https://www.doi.org/10.1371/journal.pcbi.1006018). The spectra deconvolution process yields the signals of all spectra. Due to slight changes in measurement conditions, e.g. pH variations, signal positions may vary slightly across spectra. As a consequence, prior to further analysis signals belonging to the same compound have to be aligned across spectra. This is the purpose of the 'speaq' package.

Direct usage of this function has been deprecated with metabodecon version 1.4.3 and will be removed with metabodecon version 2.0.0.

[Deprecated]

Usage

```
speaq_align(
  feat = gen_feat_mat(spectrum_data),
  maxShift = 50,
  spectrum_data,
  si_size_real_spectrum = length(spectrum_data[[1]]$y_values),
  verbose = TRUE,
  show = FALSE,
  mfrow = c(2, 1)
)
```

Arguments

`feat`	Output of `gen_feat_mat()`.
`maxShift`	Maximum number of points along the "ppm-axis" which a value can be moved by speaq package e.g. 50. 50 is a suitable starting value for plasma spectra with a digital resolution of 128K. Note that this parameter has to be individually optimized depending on the type of analyzed spectra and the digital resolution. For urine which is more prone to chemical shift variations this value most probably has to be increased.
`spectrum_data`	Output of `generate_lorentz_curves()`.
`si_size_real_spectrum`	Number of real data points in your original spectra.

verbose	Whether to print additional information during the alignment process.
show	Whether to plot the original and aligned spectra.
mfrow	Layout to use for the plot. Passed on to par(). Use mfrow = NULL if the plot layout should not be changed.

Value

A matrix containing the integral values of the spectra after alignment.

There is one row per spectrum and one column per ppm value. The entry at position i, j holds the integral value of the signal from spectrum i that has its center at position j after alignment by speaq. If there is no signal with center j in spectrum i, entry i, j is set to NA. The column names of the matrix are the ppm values of the original spectra.

Example return matrix:

```
    ...  3.59  3.55  3.57  3.56  3.55  3.54  3.53
  .-------------------------------------------> PPM
1 | NA   NA    0.20  NA    NA    NA    0.25  NA
2 | NA   NA    0.15  NA    NA    NA    0.13  NA
3 | NA   NA    NA    0.2   NA    NA    0.18  NA
SpNr
```

Author(s)

2021-2024 Wolfram Gronwald: initial version.
2024-2025 Tobias Schmidt: refactored initial version.

Examples

```
deps <- c("MassSpecWavelet", "impute")
deps_installed <- sapply(deps, requireNamespace, quietly = TRUE)
if (all(deps_installed)) {
    # 'speaq' requires 'MassSpecWavelet' and 'impute' to be installed
    sim_subset <- metabodecon_file("bruker/sim_subset")
    spectrum_data <- generate_lorentz_curves_sim(sim_subset)
    feat <- gen_feat_mat(spectrum_data)
    maxShift <- 200
    M <- speaq_align(feat, maxShift, spectrum_data, show = TRUE)
    str(M)
}
```

---

tmpdir *Temporary Session Directory*

Description

Returns the path to metabodecon's temporary session directory. This directory equals subdirectory 'metabodecon' of R's temporary session directory base::tempdir() plus additional path normalization.

Usage

```
tmpdir(subdir = NULL, create = FALSE)
```

Arguments

subdir	Optional subdirectory within the temporary session directory.
create	Whether to create the directory if it does not yet exist.

Value

Returns the path to the temporary session directory.

Author(s)

2024-2025 Tobias Schmidt: initial version.

See Also

datadir_temp() datadir_persistent()

Examples

```
tmpdir()
tmpdir("simulate_spectra")
```

---

transp *Make transparent*

Description

Make a color transparent by adding an alpha channel.

Usage

```
transp(col = "violet", alpha = 0.08)
```

Arguments

col	Character string specifying the color to make transparent.
alpha	Numeric value between 0 and 1 specifying the transparency level.

Value

A character string representing the color with an alpha channel.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
transp("violet", 0.08)
transp("black", 0.5)
```

`tree` *Print the Structure of a Directory Tree*

Description

Prints the structure of a directory tree up to a specified maximum level of depth. It lists all files and directories under the specified path, displaying them in a tree-like structure.

Usage

```
tree(path, max.level = 2, level = 0, prefix = "")
```

Arguments

`path`	The root path from which to start listing the directory structure.
`max.level`	The maximum depth of directories to list.
`level`	Internal parameter used for recursion, indicating the current level of depth.
`prefix`	Internal parameter used for formatting the printed tree structure.

Value

NULL, called for its side effect of printing the directory structure.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
metabodecon_dir <- system.file(package = "metabodecon")
tree(metabodecon_dir, max.level = 1)
```

`width` *Calculate the Width of a Numeric Vector*

Description

Calculates the width of a numeric vector by computing the difference between the maximum and minimum values in the vector.

Usage

```
width(x)
```

Arguments

`x`	A numeric vector.

Value

The width of the vector, calculated as the difference between its maximum and minimum values.

Author(s)

2024-2025 Tobias Schmidt: initial version.

Examples

```
vec <- c(1, 3, 5, 7, 9)
width(vec)
```

Index

∗ **datasets**
    sap, 51
    sim, 52

aaa_Get_Started, 3
abline(), *22*
align, 4
arrows(), *22*
as_decon0 *(*as_metabodecon_class*)*, 5
as_decon1 *(*as_metabodecon_class*)*, 5
as_decon2 *(*as_metabodecon_class*)*, 5
as_decons0 *(*as_metabodecon_class*)*, 5
as_decons1 *(*as_metabodecon_class*)*, 5
as_decons2 *(*as_metabodecon_class*)*, 5
as_decons2(), *4*
as_metabodecon_class, 5
as_spectra *(*as_metabodecon_class*)*, 5
as_spectrum *(*as_metabodecon_class*)*, 5
axis(), *22*

base::print(), *48*
base::tempdir(), *55*
box(), *43*

calculate_lorentz_curves, 8
calculate_lorentz_curves(), *39*, *46, 47*
check_mdrb, 9
check_mdrb_deps *(*check_mdrb*)*, 9
combine_peaks, 10
combine_peaks(), *4*
convert_pos, 12
convert_width *(*convert_pos*)*, 12

datadir, 13
datadir(), *14, 15*, *19*, *30*
datadir_persistent, 14
datadir_persistent(), *14, 15*, *19*, *24, 25*, *56*
datadir_temp, 15
datadir_temp(), *14*, *19*, *24, 25*, *56*
deconvolute, 15
deconvolute(), *27*, *37*
dohCluster, 17
download_example_datasets, 18
download_example_datasets(), *13, 14*, *31*
draw_spectrum, 20
draw_spectrum(), *42, 43*

evalwith, 23

gen_feat_mat, 25
gen_feat_mat(), *17*
generate_lorentz_curves, 27
generate_lorentz_curves(), *8*, *29*, *31*
generate_lorentz_curves_sim
        *(*generate_lorentz_curves*)*, 27
generate_lorentz_curves_sim(), *29*
get_data_dir, 30
get_ppm_range, 31
get_si_mat, 32
get_started *(*aaa_Get_Started*)*, 3

install_mdrb, 33
is_align *(*is_metabodecon_class*)*, 34
is_aligns *(*is_metabodecon_class*)*, 34
is_decon0 *(*is_metabodecon_class*)*, 34
is_decon1 *(*is_metabodecon_class*)*, 34
is_decon2 *(*is_metabodecon_class*)*, 34
is_decons0 *(*is_metabodecon_class*)*, 34
is_decons1 *(*is_metabodecon_class*)*, 34
is_decons2 *(*is_metabodecon_class*)*, 34
is_metabodecon_class, 34
is_spectra *(*is_metabodecon_class*)*, 34
is_spectrum *(*is_metabodecon_class*)*, 34

legend(), *22*
lines(), *21*, *43*

make_spectrum, 35
MetaboDecon1D, *4*, *8*, 37
MetaboDecon1D(), *8*, *41*, *46, 47*
metabodecon_file, 37

mtext(), *22*

options(), *23, 24*

par(), *23, 24*, *43, 44*
plot_lorentz_curves_save_as_png, 40
plot_lorentz_curves_save_as_png(), *8*, *39*, *46, 47*
plot_spectra, 41
plot_spectrum, 42
plot_spectrum(), *20*, *40*, *42, 43*, *45, 46*
plot_spectrum_superposition_save_as_png, 45
plot_spectrum_superposition_save_as_png(), *8*, *39*, *41*, *47*
plot_triplets, 46
plot_triplets(), *8*, *39*, *41*, *46*
points(), *22*
print.align *(*print_methods*)*, 48
print.aligns *(*print_methods*)*, 48
print.decon1 *(*print_methods*)*, 48
print.decon2 *(*print_methods*)*, 48
print.decons1 *(*print_methods*)*, 48
print.decons2 *(*print_methods*)*, 48
print.spectra *(*print_methods*)*, 48
print.spectrum *(*print_methods*)*, 48
print_methods, 48

read_spectra, *6*, 49
read_spectrum, 50
read_spectrum(), *6*
readline(), *23*
rect(), *22*

sap, 51
segments(), *22*
setwd(), *23*
sim, 52
simulate_spectrum, 52
sink(), *23*
speaq_align, 54
speaq_align(), *4*, *10*, *26*
system.time(), *23*, *25*

title(), *21*
tmpdir, 55
tmpdir(), *15*, *23*
tools::R_user_dir(), *13, 14*
transp, 56

tree, 57

utils::install.packages(), *33*

width, 58